

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES PATTERN TEST REPORT

Test Standard : IEC/EN 60598-1 (2008) · IEC/EN 60529 (2001-2002)

Date of Receipt : 2020 / 01 / 16

Test Date : 2020 / 01 / 20 ~ 2020 / 01 / 23

Result of determination this subclass type experiment : **PASS(IP65)**

1. Issue date for test report : 2020 / 01 / 24
2. Report No : 16062001
3. Total pages : 7
4. Test report without steel stamp is not valid, and shall not be reproduced except in full.
5. Test sample is not sampling by laboratory, test result relate only to the items tested.
6. Test report is not responsible for advertisement or promotion for products.

Approved Signatory:



Test Report

Information for test items

Applicant : LA LUCE DI MARLETTA SNC

Applicant address : Via Archimede, 365, 97100, Ragusa, Italy

Manufacturer : LA LUCE DI MARLETTA SNC

Manufacturer address : Via Archimede, 365, 97100, Ragusa, Italy

Product : WALL MOUNTED LIGHT

Model No. : LL-CLD01-20W-830-65

Logo :  LA LUCE
The logo consists of a stylized circular light fixture icon above the text "LA LUCE".

Uses the place : ☐ in door ☒ out door

Dimensions(mm) : Ø60×200

Application test rank : IP65

Standard chapter		Result of test	Determination
Temperature : 25.2 °C Humidity : 56.4 %RH			
IP6X	IEC/EN 60598-1 (sec.9) IEC/EN 60529 (sec.11.4) (sec.13.1) (sec.13.4) (sec.13.6)	No dust into the enclosure.	PASS
IPX6	IEC/EN 60598-1 (sec.9) IEC/EN 60529 (sec.14.1) (sec.14.2.6) (sec.14.3)	No water into the enclosure.	PASS

Photo of test items

the appearance of photo



-Following blank-

Photo of test items

IP6X testing



IP6X after the test



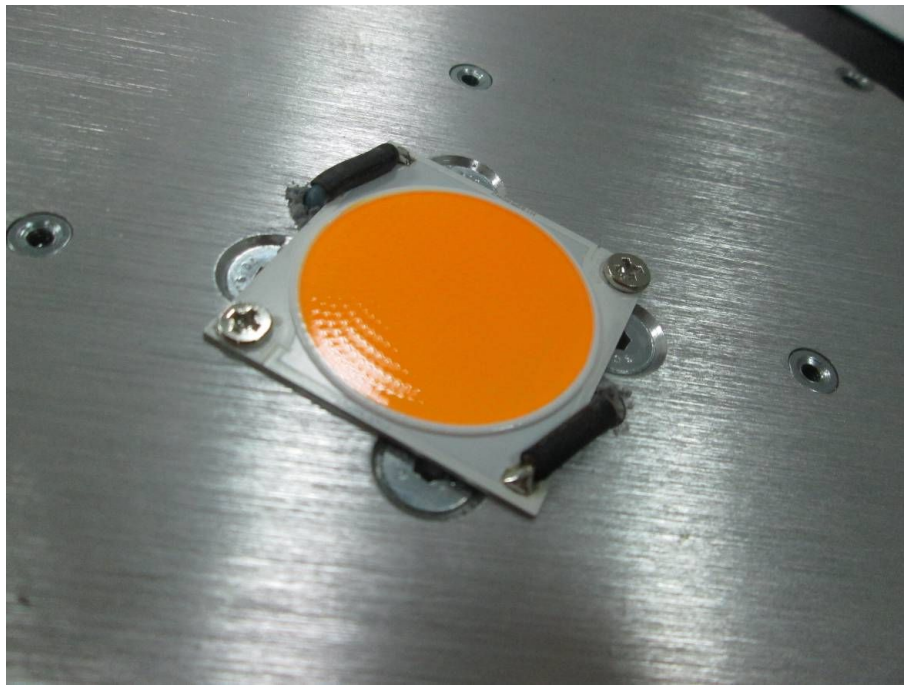


Photo of test items

IPX6 testing

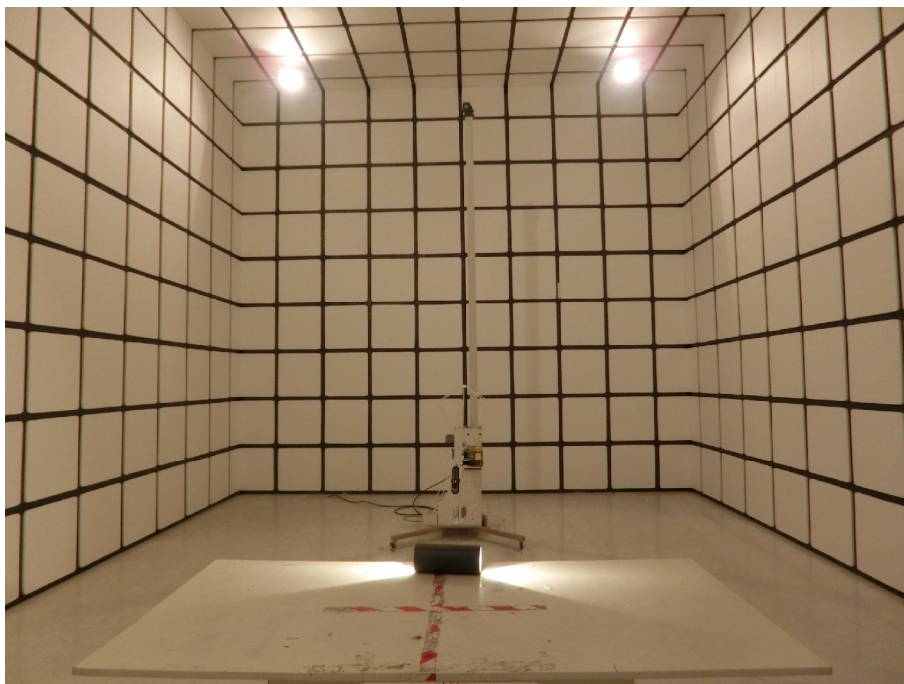

IPX6 after the test

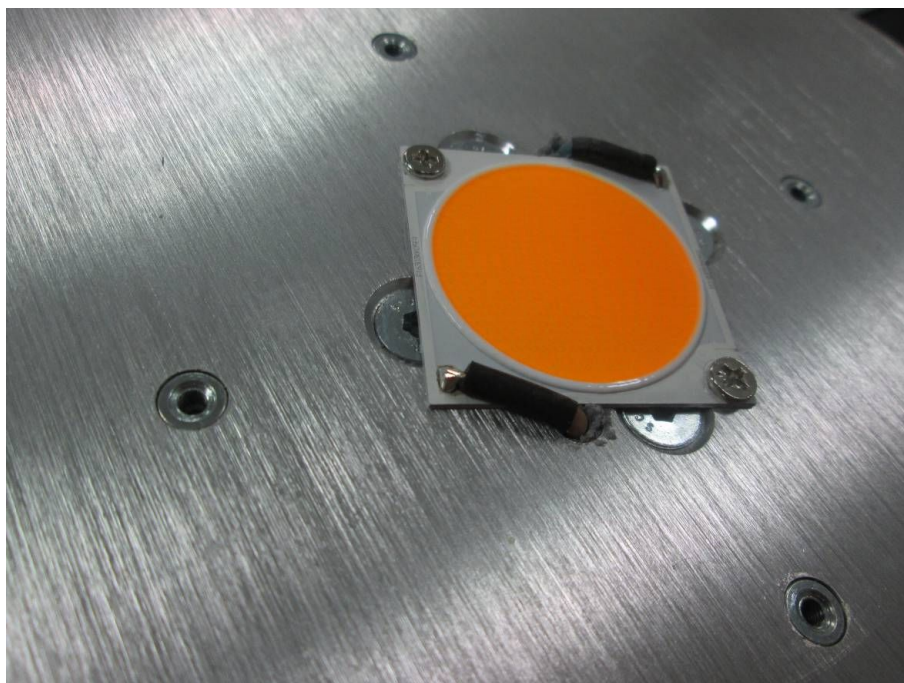



Equipment list and testing engineer for test

Item	Equipment No	Equipment	Manufacturer / Type / Series No
1	99S-04	Bears the dust testing machine class dust + Floating dust	TAICHY TECHNOLOGY LTD DT-1500CF
2	99S-07	Bears the rain water testing machine	TAICHY TECHNOLOGY LTD RT-IEC-IPX5.6
3	99S-10	IP test touch and access wire	Shanghai Haiyue Electric / DTPP-1.0/100
Testing engineers : Gauk Zhang			

-Following blank-