
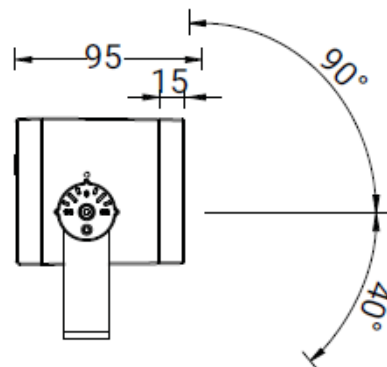




Technical data

Type	Surface
Installation position	Flood lights
Installation environment	Outdoor
LED Chip	Cree
Beam Angle	33°
Light emission direction	frontal
Power	20W
Source lumens	1950 lm
Frequency	50 - 60 Hz
CCT / Tone	3000K / 4000K
Colour rendering index	80 Ra
AC / DC	AC 220V/DC24V
Energy class	A++
Safety class	1
IP	IP67
IK	IK09
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Operating temperature	-30°C / +55°C
Driver included	Driver
Directional	Swivelling
Cable included	Yes
Cable length	2m

Finishing casing

Material	Die-cast Aluminium EN AB - 46100
Colour	Black / Silver / Gray
Processing	Open pore anodizing + Powder Coating

Finishing diffuser

Material	Extra clear glass - Tempered
Colour	transparent
Processing	Silk-screening

Finishing bracket

Material	Die-cast Aluminium EN AB - 46100
Colour	Black / Silver / Gray

Cables Electrification

Cable connector	Yes
-----------------	-----