
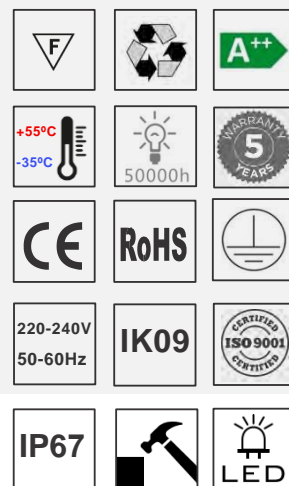
 **K3** Wall/Ceiling mounted clearly defined symmetric of light. Adapted to illuminate ground surfaces with a wide beam of light with different sizes, wattage, lumen, CRI, and CCT options.


 **K3** Parete / soffitto di forma quadrata, simmetrica di luce chiaramente definita. Adattato per illuminare le superfici del terreno con un ampio fascio di luce con diverse opzioni di dimensioni, wattaggio, lumen, CRI e CCT.

TECHNICAL DATA

Type	Wall / Ceiling Surface
Installation	Surface / Steel Wire
Housing	UV Resistant PC
Processing	N/A
Diffuser	Polycarbonate / Clear
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed




MODEL CODE

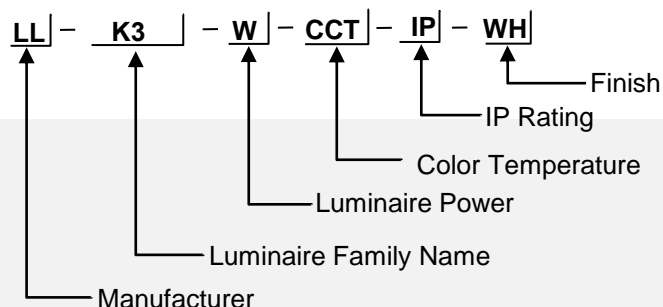

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm)	CRI
<input type="checkbox"/> 0.5	45	90	>90
<input type="checkbox"/> 0.7	63	90	>90
<input type="checkbox"/> 1.0	90	90	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K ☐ RGB ☐ RGBW

BEAM ANGLE OPTION

☐ DIFFUSED



FINISH OPTION



☐ WH-White ☐ BR-Black ☐

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ DX

DMX/512

☐ D0

On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM


Photometric:

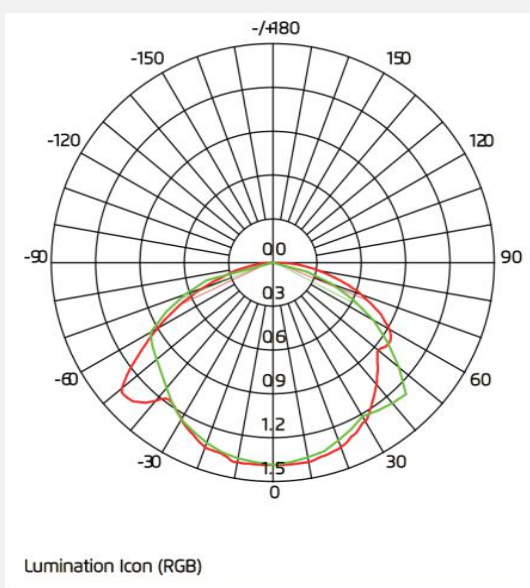

Luminous Flux: 25.83 lm


3.281ft 1m	0.0384,0.1289fc 0.4137,1.387lx	10.73ft 327.13cm
6.562ft 2m	0.0096,0.0322fc 0.1034,0.3467lx	21.47ft 654.27cm
9.843ft 3m	0.0043,0.0143fc 0.0460,0.1541lx	32.2ft 981.40cm
13.12ft 4m	0.0024,0.0081fc 0.0259,0.0867lx	42.93ft 1308.54cm
16.4ft 5m	0.0015,0.0052fc 0.0165,0.0555lx	53.66ft 1635.67cm
H(m)	Eavg,Emax	Beam Angle:117 .12 ° Diameter

Dimension:

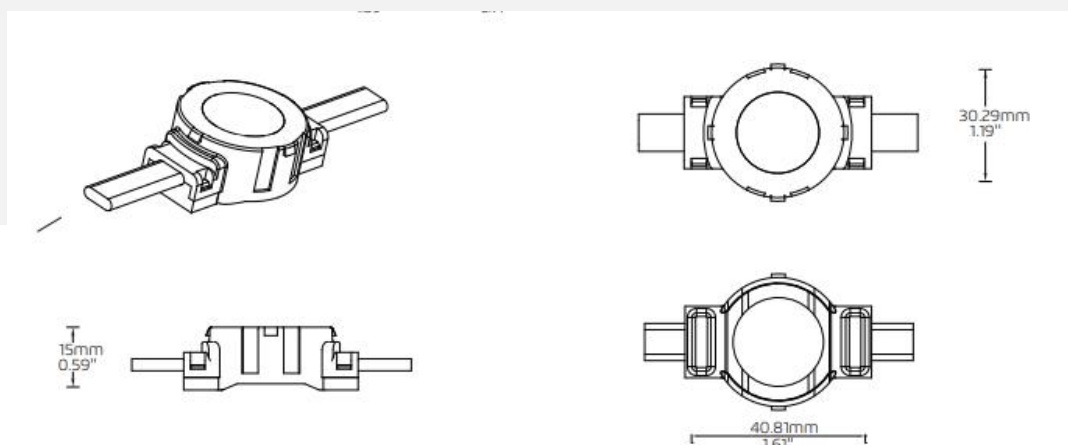


Installation:


Mounting Clip

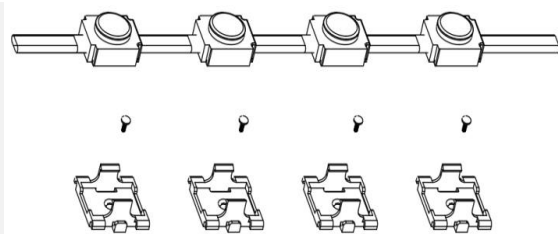

Steel Wire

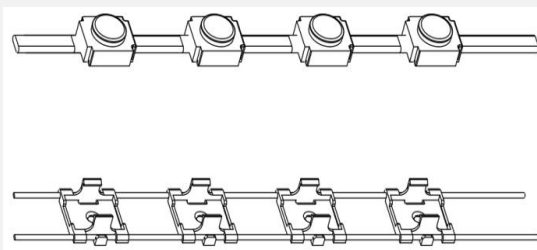


Control Diagram:

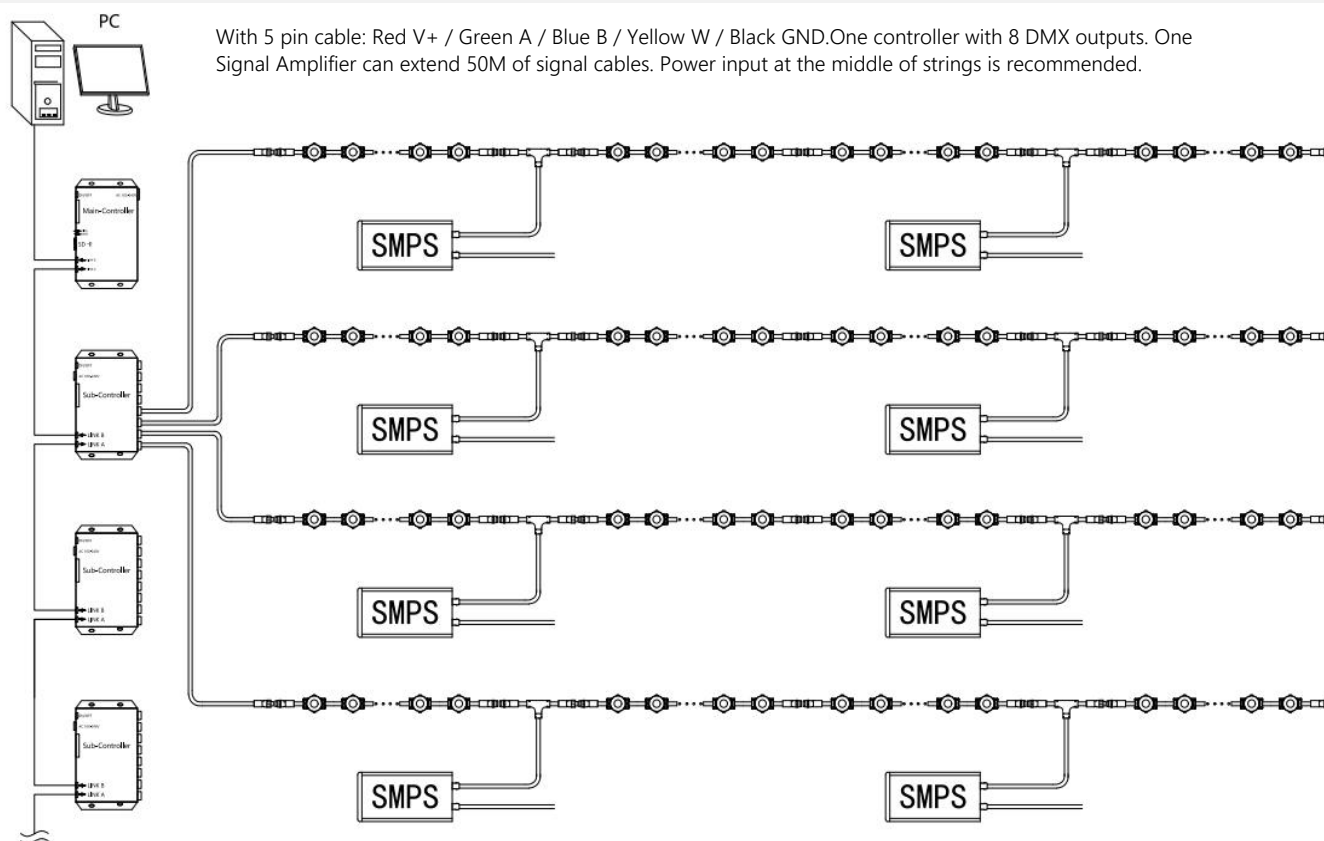


※ The actual system diagram may subject to change from the above example.

Accessories:

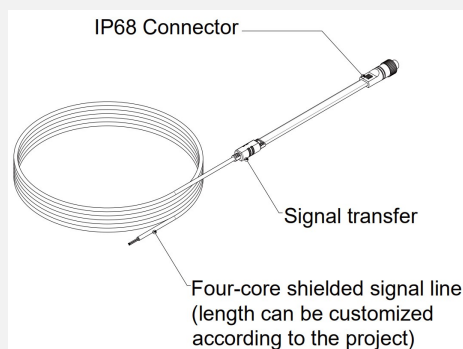

Signal Adapter

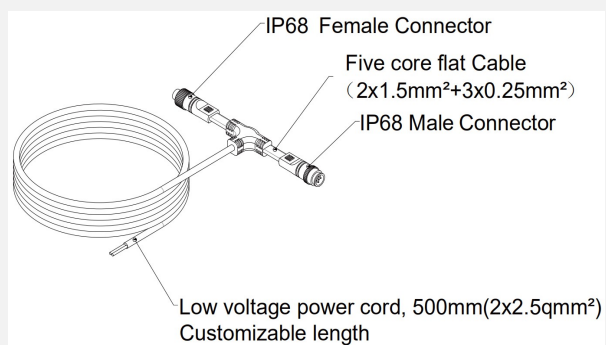

Power T Connector