




 **Bhc** is a bulkhead surface luminaire feature IP65 rated construction with a die-cast aluminum body and polycarbonate diffuser for glare reduction. A CRI value of Ra > 80 ensures light quality and eyelid construction provides asymmetric downward light emission.

 **BHa** è un apparecchio di superficie per paratie caratterizzato da una struttura IP65 con corpo in alluminio pressofuso e diffusore in policarbonato per la riduzione dell'abbagliamento. Un valore CRI di Ra > 80 garantisce la qualità della luce e la costruzione della palpebra fornisce un'emissione di luce asimmetrica verso il basso.

TECHNICAL DATA

Type	Surface
Installation	Indoor/Outdoor
Housing	Die cast Aluminum
Processing	Powder Coated
Diffuser	Polycarbonate Opal
Light Emission Direction	Asymmetric
Beam Angle	Wide
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Adjustable	No






LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

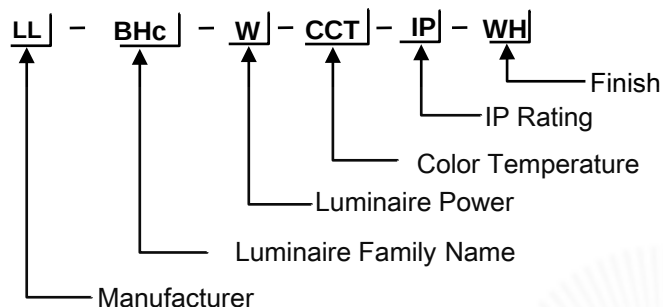


System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	Colour Temperature (K)	CRI
10	1350	135	3000K	>80
13	1755	135	3000K	>80
16	2160	135	3000K	>80
18	2430	135	3000K	>80
20	2700	135	3000K	>80
25	3375	135	3000K	>80
30	4050	135	3000K	>80

COLOR TEMPERATURE OPTION



2700K 3000K 4000K 5000K 6000K

FINISH OPTION

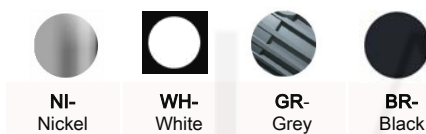

CONTROL OPTION

DD

DALI DIM



DI

0-10V DIM



LED CHIPS

OSRAM



NICHIA

TRIDONIC



Panasonic



CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS



TRIDONIC




OSRAM



PHILIPS

Helvar


more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

PHOTOMETRIC

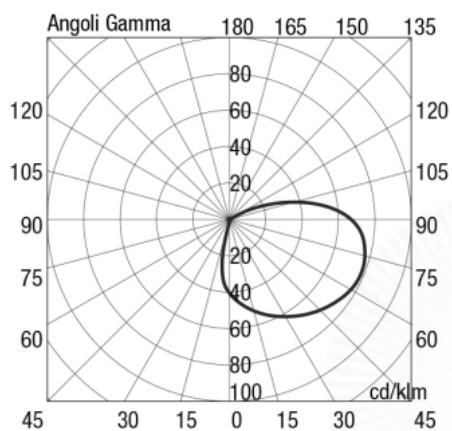

3D MODULE



LA LUCE

LIGHT - DESIGN - MORE