





 **LIN** Diffused Recessed linear recessed luminaire has a minimalist appearance emphasizes architectural details in a discreet way, offers a diffused and homogeneous light emission without shadows with different length, wattage, lumen, beam angle, CRI, and CCT option.

 **LIN** Diffused Incasso lineare da incasso ha un aspetto minimalista che enfatizza i dettagli architettonici in modo discreto, offre un'emissione di luce diffusa e omogenea senza ombre con diverse opzioni di lunghezza, potenza, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Linear Inground
Installation	Recessed
Housing	Die-cast Aluminium stainless steel frame
Processing	Powder Coated
Diffuser	Tempered safety glass with anti glare lens
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	II
Gasket	Molding shape silicon seal
Cable Gland	Nickel coated copper/ABS
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

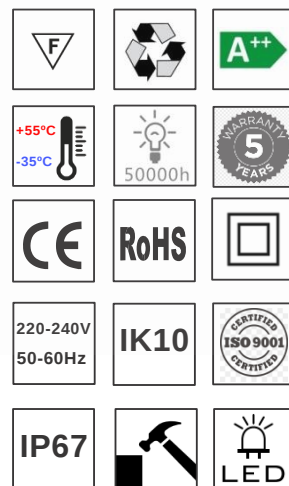





LA LUCE

LIGHT - DESIGN - MORE

MODEL CODE

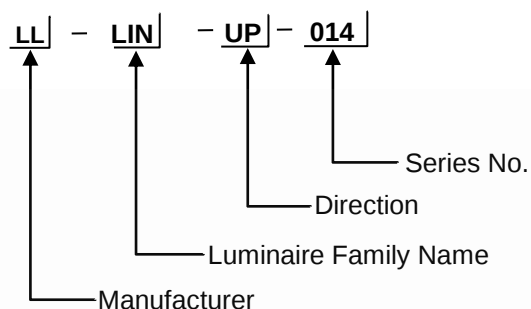

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI Options
☐ 8	888	111	>80/>90
☐ 11	1221	111	>80/>90
☐ 15	1665	111	>80/>90
☐ 20	2220	111	>80/>90
☐ 25	2775	111	>80/>90
☐ 30	3330	111	>80/>90
☐ 36	3996	111	>80/>90
☐ 40	4440	111	>80/>90
☐ 48	5328	111	>80/>90

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric



FINISH OPTION



☐ SS-Stainless Steel ☐ PPG ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM
☐ D1 0-10V DIM
☐ PD Phase Cut DIM
☐ D0 On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

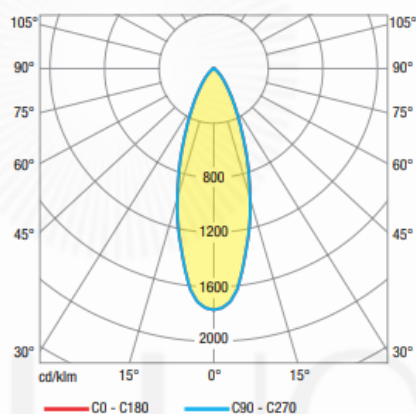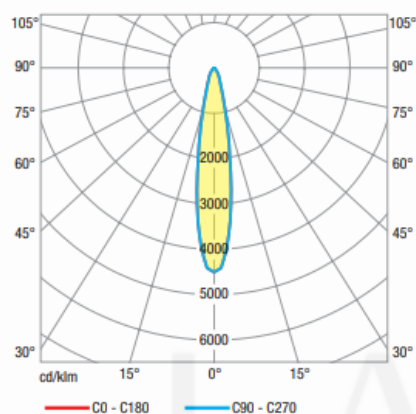

3D MODULE

