





 **LNRS** is a surface linear LED luminaire suitable for a wide range of wall washing, accent, surface grazing, and indirect lighting applications in architectural, hospitality, and retail environments with different Lengths, wattage, lumen, beam angle, CRI, and CCT option.

 **LNRS** è un apparecchio di illuminazione a LED lineare di superficie adatto per un'ampia gamma di applicazioni di illuminazione a parete, d'accento, radente e indiretta in ambienti architettonici, alberghieri e di vendita al dettaglio con diverse lunghezze, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Linear Uplight
Installation	Surface
Housing	Die-cast aluminium
Processing	Powder Coated
Diffuser	Tempered safety glass with antiglare lens
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	Yes

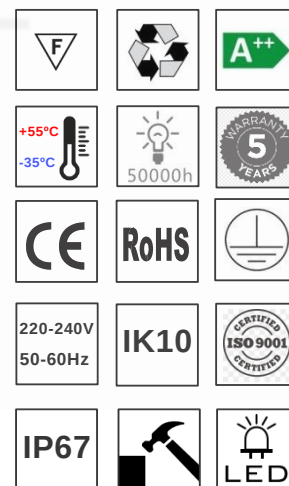




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

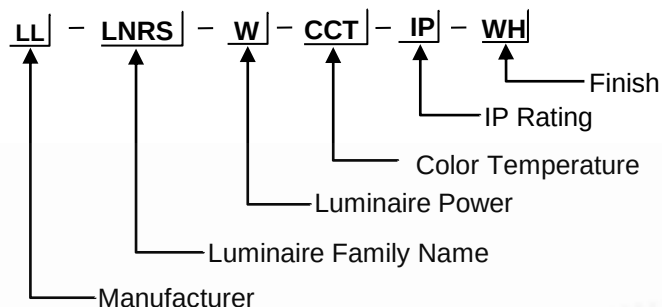

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 8	760	95	>90
☐ 10	950	95	>90
☐ 12	1140	95	>90
☐ 15	1425	95	>90
☐ 20	1900	95	>90
☐ 25	2375	95	>90
☐ 30	2850	95	>90
☐ 36	3420	95	>90
☐ 40	3800	95	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric



FINISH OPTION



☐ SS-Stainless Steel

☐ AL-Aluminum

☐ GR-Grey

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

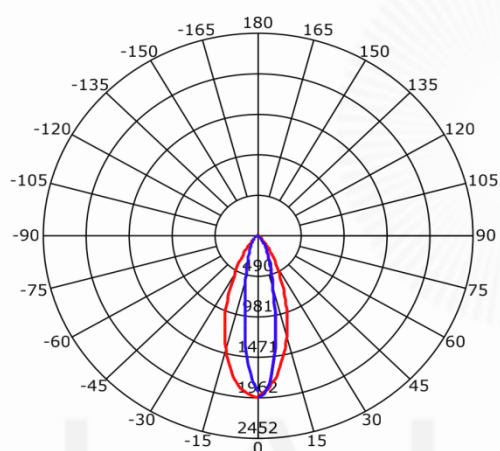

3D MODULE

