



TEST REPORT
IEC 60598-2-2
Luminaires
Part 2: Particular requirements
Section 2: Recessed luminaires

Report Number : 083-1882203-000

Date of issue : 2019-08-08

Total number of pages : 40

Name of Testing Laboratory : TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai
 preparing the Report : Branch

Applicant's name : La-Luce di Marletta SNC

Address : Via Archimede, 365, 97100, Ragusa, Italy

Test specification:

Standard : IEC 60598-2-2:2011 (Third Edition) used in conjunction with
 IEC 60598-1:2014 (Eighth Edition)

Test procedure : CB Scheme

Non-standard test method : N/A

Test Report Form No. : IEC60598_2_1A

Test Report Form(s) Originator.... : Intertek Semko AB

Master TRF..... : 2014-09

**Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical
 Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.


This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description	LED Light	
Trade Mark.....	LL-Pinspot01	
Manufacturer	Same as applicant	
Model/Type reference	see model list	
Ratings	200-240V~; 50/60Hz; Class I; IP65 Details see model list	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No.151 Heng Tong Road. Shanghai 200070 P.R. China
Testing location/ address		No. 1999, Duhui Road, Shanghai, 201108, P. R. China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		N/A
Tested by (name, function, signature)		Jiani WANG, Project Engineer
Approved by (name, function, signature) ..		Huidong ZHANG, Project Manager
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1:	N/A
Testing location/ address		N/A
Tested by (name, function, signature)		N/A
Approved by (name, function, signature) ..		N/A
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2:	N/A
Testing location/ address		N/A
Tested by (name + signature).....		N/A
Witnessed by (name, function, signature) .:		N/A
Approved by (name, function, signature) ..		N/A
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4:	N/A
Testing location/ address		N/A
Tested by (name, function, signature)		N/A
Witnessed by (name, function, signature) .:		N/A
Approved by (name, function, signature) ..		N/A
Supervised by (name, function, signature) :		N/A



List of Attachments (including a total number of pages in each attachment): Requirement of IEC 62031:2008/A2:2014 have been evaluated and found to be met by testing. Please refer to appendix 1. EMF requirements of IEC 62493:2015 deemed to comply with the Van der Hoofden test without testing. Please refer to appendix 2. Requirements for photobiological safety for LED are considered in IEC 62471:2006. Please refer to appendix 3.	
Summary of testing: All applicable hazards are covered by the harmonized	
Test performed (name of test and test clause): Unless otherwise specified, Complete tests are performed on LL-PINSPOT01-6W which is rated highest wattage and contains all components Visual check and endurance test are applied on other models The test results comply with the requirements	Testing location: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch No. 1999, Duhui Road, Shanghai, 201108, P. R. China
Summary of compliance with National Differences: List of countries addressed N/A The deviation between EN 60598-2-2: 2012 used in conjunction with EN 60598-1:2015 and IEC 60598-2-2:2011 (Third Edition) used in conjunction with IEC 60598-1:2014 (Eighth Edition) is taken into account <input checked="" type="checkbox"/> The product fulfils the requirements of EN 60598-2-2:2012 used in conjunction with EN 60598-1:2015	
Copy of marking plate: (See Construction Data form for electrical equipment and machinery)	

Test item particulars: LED Spotlight	
Classification of installation and use.....: Class I	
Supply Connection: Connecting leads:	
Possible test case verdicts: - test case does not apply to the test object.....: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement.....: F (Fail)	
Testing: Date of receipt of test item.....: 2019-07-27 Date (s) of performance of tests: 2019-07-28 to 2019-08-06	
General remarks:	
<p>“(See Enclosure #)” refers to additional information appended to the report. “(See appended table)” refers to a table appended to the report. Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.</p> <p>Remark 1: The following contents are included and as appendix of this test report: • Test report IEC 60598-2-2:2011 (Third Edition) used in conjunction with IEC 60598-1:2014 (Eighth Edition) • Appendix 1: Additional requirements of IEC 62031:2008/A2:2014 • Appendix 2: Additional requirements of IEC 62493:2015 • Appendix 3: Additional requirements of IEC 62471:2006 • Appendix 4: Additional requirements of IEC/TR 62778:2014 • Appendix 5: Photographs</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60598-1:2014:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies).....: La-Luce di Marletta SNC No.01 Caihong Street, Jianghai District, Jiangmen City, Guangdong Province, PRC.	
General product information: The products covered in this test report are recessed luminaires. All the products are the same construction, only the shape is difference.	

Model list

Model	Wattage(W)	LED Driver	Size(mm)
LL-PINSPOT01-6W	6	LPC-20-350	-
LL-PINSPOT01-8W	8	LPC-20-350	-
LL-PINSPOT01-10W	10	LPC-20-350	-
LL-PINSPOT01-12W	12	LPC-20-350	-
LL-PINSPOT01-14W	14	LPC-20-350	-
LL-PINSPOT01-15W	15	LPC-20-350	-
LL-PINSPOT01-16W	16	LPC-20-350	-
LL-PINSPOT-6W	6	LPC-20-350	-
LL-PINSPOT-8W	8	LPC-20-350	-
LL-PINSPOT-10W	10	LPC-20-350	-
LL-PINSPOT-12W	12	LPC-20-350	-
LL-PINSPOT-14W	14	LPC-20-350	-
LL-PINSPOT-15W	15	LPC-20-350	-
LL-PINSPOT-16W	16	LPC-20-350	-

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict

2.3 (0)	GENERAL TEST REQUIREMENTS		P
2.3 (0.1)	Information for luminaire design considered	Standard IEC 62471 <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	—
2.3 (0.3)	More sections applicable	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—

2.4 (2)	CLASSIFICATION		P
2.5 (2.2)	Type of protection	Class I	—
2.5 (2.3)	Degree of protection	IP65	—
2.5 (2.4)	Luminaire suitable for direct mounting on normally flammable surfaces	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
2.5 (2.5)	Luminaire for normal use	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	Luminaire for rough service	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—

2.6 (3)	MARKING		P
2.6 (3.2)	Mandatory markings		P
	Position of the marking		P
	Format of symbols/text		P
2.6 (3.3)	Additional information		P
	Language of instructions		P
2.6 (3.3.1)	Combination luminaires		P
2.6 (3.3.2)	Nominal frequency in Hz		P
2.6 (3.3.3)	Operating temperature		N/A
2.6 (3.3.4)	Symbol or warning notice		N/A
2.6 (3.3.5)	Wiring diagram		N/A
2.6 (3.3.6)	Special conditions		N/A
2.6 (3.3.7)	Metal halide lamp luminaire – warning		N/A
2.6 (3.3.8)	Limitation for semi-luminaires		N/A
2.6 (3.3.9)	Power factor and supply current		N/A
2.6 (3.3.10)	Suitability for use indoors		N/A
2.6 (3.3.11)	Luminaires with remote control		N/A
2.6 (3.3.12)	Clip-mounted luminaire – warning		N/A
2.6 (3.3.13)	Specifications of protective shields		N/A
2.6 (3.3.14)	Symbol for nature of supply		P
2.6 (3.3.15)	Rated current of socket outlet		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.6 (3.3.16)	Rough service luminaire		N/A
2.6 (3.3.17)	Mounting instruction for type Y, type Z and some type X attachments		P
2.6 (3.3.18)	Non-ordinary luminaires with PVC cable		N/A
2.6 (3.3.19)	Protective conductor current in instruction if applicable		N/A
2.6 (3.3.20)	Provided with information if not intended to be mounted within arm's reach		N/A
2.6 (3.3.21)	Non replaceable and non-user replaceable light sources information provided		P
	Cautionary symbol		N/A
2.6 (3.3.22)	Controllable luminaires, classification of insulation provided		N/A
2.6 (3.4)	Test with water		P
	Test with hexane		P
	Legible after test		P
	Label attached		P

2.7 (4)	CONSTRUCTION		P
2.7 (4.2)	Components replaceable without difficulty		P
2.7 (4.3)	Wireways smooth and free from sharp edges		P
2.7 (4.4)	Lampholders		N/A
2.7 (4.4.1)	Integral lampholder		N/A
2.7 (4.4.2)	Wiring connection		N/A
2.7 (4.4.3)	Lampholder for end-to-end mounting		N/A
2.7 (4.4.4)	Positioning		N/A
	- pressure test (N)		—
	After test the lampholder comply with relevant standard sheets and show no damage		N/A
	After test on single-capped lampholder the lampholder have not moved from its position and show no permanent deformation		N/A
	- bending test (N)		—
	After test the lampholder have not moved from its position and show no permanent deformation		N/A
2.7 (4.4.5)	Peak pulse voltage		N/A
2.7 (4.4.6)	Centre contact		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.7 (4.4.7)	Parts in rough service luminaires resistant to tracking		N/A
2.7 (4.4.8)	Lamp connectors		N/A
2.7 (4.4.9)	Caps and bases correctly used		N/A
2.7 (4.4.10)	Light source for lampholder or connection according IEC 60061 not connected another way		N/A
2.7 (4.5)	Starter holders		N/A
	Starter holder in luminaires other than class II		N/A
	Starter holder class II construction		N/A
2.7 (4.6)	Terminal blocks		P
	Tails		P
	Unsecured blocks		N/A
2.7 (4.7)	Terminals and supply connections		P
2.7 (4.7.1)	Contact to metal parts		N/A
2.7 (4.7.2)	Test 8 mm live conductor		N/A
	Test 8 mm earth conductor		N/A
2.7 (4.7.3)	Terminals for supply conductors		P
2.7 (4.7.3.1)	Welded method and material		N/A
	- stranded or solid conductor		N/A
	- spot welding		N/A
	- welding between wires		N/A
	- Type Z attachment		N/A
	- mechanical test according to 15.8.2		N/A
	- electrical test according to 15.9		N/A
	- heat test according to 15.9.2.3 and 15.9.2.4		N/A
2.7 (4.7.4)	Terminals other than supply connection		P
2.7 (4.7.5)	Heat-resistant wiring/sleeves		N/A
2.7 (4.7.6)	Multi-pole plug		N/A
	- test at 30 N		N/A
2.7 (4.8)	Switches		N/A
	- adequate rating		N/A
	- adequate fixing		N/A
	- polarized supply		N/A
	- compliance with IEC 61058-1 for electronic switches		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.7 (4.9)	Insulating lining and sleeves		N/A
2.7 (4.9.1)	Retainment		N/A
	Method of fixing		—
2.7 (4.9.2)	Insulated linings and sleeves:		N/A
	Resistant to a temperature > 20 °C to the wire temperature or		N/A
	a) & c) Insulation resistance and electric strength		N/A
	b) Ageing test. Temperature (°C)		N/A
2.7 (4.10)	Double or reinforced insulation		P
2.7 (4.10.1)	No contact, mounting surface – accessible metal parts – wiring of basic insulation	Certificated Class II LED driver	P
	Safe installation fixed luminaires		N/A
	Capacitors and switches		N/A
	Interference suppression capacitors according to IEC 60384-14		N/A
2.7 (4.10.2)	Assembly gaps:		N/A
	- not coincidental		N/A
	- no straight access with test probe		N/A
2.7 (4.10.3)	Retainment of insulation:		N/A
	- fixed		N/A
	- unable to be replaced; luminaire inoperative		N/A
	- sleeves retained in position		N/A
	- lining in lampholder		N/A
2.7 (4.11)	Electrical connections and current-carrying parts		P
2.7 (4.11.1)	Contact pressure		P
2.7 (4.11.2)	Screws:		N/A
	- self-tapping screws		N/A
	- thread-cutting screws		N/A
2.7 (4.11.3)	Screw locking:		N/A
	- spring washer		N/A
	- rivets		N/A
2.7 (4.11.4)	Material of current-carrying parts		P
2.7 (4.11.5)	No contact to wood or mounting surface		P
2.7 (4.11.6)	Electro-mechanical contact systems		N/A
2.7 (4.12)	Screws and connections (mechanical) and glands		P

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.7 (4.12.1)	Screws not made of soft metal		P
	Screws of insulating material		N/A
	Torque test: torque (Nm); part.....:	Enclosure: 1,2Nm	P
	Torque test: torque (Nm); part.....:		N/A
	Torque test: torque (Nm); part.....:		N/A
2.7 (4.12.2)	Screws with diameter < 3 mm screwed into metal		N/A
2.7 (4.12.4)	Locked connections:		N/A
	- fixed arms; torque (Nm).....:		N/A
	- lampholder; torque (Nm).....:		N/A
	- push-button switches; torque 0,8 Nm.....:		N/A
2.7 (4.12.5)	Screwed glands; force (Nm).....:		N/A
2.7 (4.13)	Mechanical strength		P
2.7 (4.13.1)	Impact tests:		P
	- fragile parts; energy (Nm).....:		N/A
	- other parts; energy (Nm).....:	All enclosure: 0,35Nm	P
	1) live parts		P
	2) linings		N/A
	3) protection		P
	4) covers		P
2.7 (4.13.3)	Straight test finger		P
2.7 (4.13.4)	Rough service luminaires		N/A
	- IP54 or higher		N/A
	a) fixed		N/A
	b) hand-held		N/A
	c) delivered with a stand		N/A
	d) for temporary installations and suitable for mounting on a stand		N/A
2.7 (4.13.6)	Tumbling barrel		N/A
2.7 (4.14)	Suspensions, fixings and means of adjusting		P
2.7 (4.14.1)	Mechanical load:		P
	A) four times the weight		P
	B) torque 2,5 Nm		N/A
	C) bracket arm; bending moment (Nm).....:		N/A
	D) load track-mounted luminaires		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	E) clip-mounted luminaires, glass-shelve. Thickness (mm)		N/A
	Metal rod. diameter (mm)		N/A
	Fixed luminaire or independent control gear without fixing devices		N/A
2.7 (4.14.2)	Load to flexible cables		N/A
	Mass (kg)		—
	Stress in conductors (N/mm ²)		N/A
	Mass (kg) of semi-luminaire		—
	Bending moment (Nm) of semi-luminaire		N/A
2.7 (4.14.3)	Adjusting devices:		N/A
	- flexing test; number of cycles.....		N/A
	- strands broken		N/A
	- electric strength test afterwards		N/A
2.7 (4.14.4)	Telescopic tubes: cords not fixed to tube; no strain on conductors		N/A
2.7 (4.14.5)	Guide pulleys		N/A
2.7 (4.14.6)	Strain on socket-outlets		N/A
2.7 (4.15)	Flammable materials		P
	- glow-wire test 850°C.....	See Test Table 2.16 (13.3.2)	P
	- spacing ≥ 30 mm		N/A
	- screen withstanding test of 13.3.1		N/A
	- screen dimensions		N/A
	- no fiercely burning material		P
	- thermal protection		N/A
	- electronic circuits exempted		N/A
2.7 (4.15.2)	Luminaires made of thermoplastic material with lamp control gear		N/A
	a) construction		N/A
	b) temperature sensing control		N/A
	c) surface temperature		N/A
2.7 (4.16)	Luminaires for mounting on normally flammable surfaces		P
	No lamp control gear	(compliance with Section 12)	N/A
2.7 (4.16.1)	Lamp control gear spacing:		N/A
	- spacing 35 mm		N/A
	- spacing 10 mm		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.7 (4.16.2)	Thermal protection:		N/A
	- in lamp control gear		N/A
	- external		N/A
	- fixed position		N/A
	- temperature marked lamp control gear		N/A
2.7 (4.16.3)	Design to satisfy the test of 12.6	(see clause 12.6)	N/A
2.7 (4.17)	Drain holes		N/A
	Clearance at least 5 mm		N/A
2.7 (4.18)	Resistance to corrosion		N/A
2.7 (4.18.1)	- rust-resistance		N/A
2.7 (4.18.2)	- season cracking in copper		N/A
2.7 (4.18.3)	- corrosion of aluminium		N/A
2.7 (4.19)	Igniters compatible with ballast		N/A
2.7 (4.20)	Rough service vibration		N/A
2.7 (4.21)	Protective shield		N/A
2.7 (4.21.1)	Shield fitted if tungsten halogen lamps or metal halide lamps		N/A
	Shield of glass if tungsten halogen lamps		N/A
2.7 (4.21.2)	Particles from a shattering lamp not impair safety		N/A
2.7 (4.21.3)	No direct path		N/A
2.7 (4.21.4)	Impact test on shield		N/A
	Glow-wire test on lamp compartment.....	See Test Table 2.16 (13.3.2)	N/A
2.7 (4.22)	Attachments to lamps not cause overheating or damage		N/A
2.7 (4.23)	Semi-luminaires comply Class II		N/A
2.7 (4.24)	Photobiological hazards		P
2.7 (4.24.1)	No excessive UV radiation if tungsten halogen lamps and metal halide lamps (Annex P)		N/A
2.7 (4.24.2)	Retinal blue light hazard		P
	Luminaires with E_{thr} :		P
	a) Fixed luminaires		P
	- distance x m, borderline between RG1 and RG2... RG0		P
	- marking and instruction according 3.2.23		N/A
	b) Portable and handheld luminaires		N/A
	- marking according 3.2.23 if RG1 exceeded at 200 mm according to IEC/TR 62778		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Portable luminaires for children IEC 60598-2-10 and Mains socket outlet nightlights IEC 60598-2-12 not exceed RG1 at 200 mm according to IEC/62778		N/A
2.7 (4.25)	Mechanical hazard		P
	No sharp point or edges		P
2.7 (4.26)	Short-circuit protection		N/A
2.7 (4.26.1)	Adequate means of uninsulated accessible SELV parts		N/A
2.7 (4.26.2)	Short-circuit test with test chain according 4.26.3		N/A
	Test chain not melt through		N/A
	Test sample not exceed values of Table 12.1 and 12.2		N/A
2.7 (4.27)	Terminal blocks with integrated screwless earthing contacts		N/A
	Test according Annex V		N/A
	Pull test of terminal fixing (20 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Pull test of mechanical connection (50 N)		N/A
	After test, resistance < 0,05 Ω		N/A
	Voltage drop test, resistance < 0,05 Ω		N/A
2.7 (4.28)	Fixing of thermal sensing control		N/A
	Not plug-in or easily replaceable type		N/A
	Reliably kept in position		N/A
	No adhesive fixing if UV radiations from a lamp can degrade the fixing		N/A
	Not outside the luminaire enclosure		N/A
	Test of adhesive fixing:		N/A
	Max. temperature on adhesive material ($^{\circ}\text{C}$) :		—
	100 cycles between t min and t max		N/A
	Temperature sensing control still in position		N/A
2.7 (4.29)	Luminaires with non-replaceable light source		P
	Not possible to replace light source		P
	Live part not accessible after parts have been opened by hand or tools		P
2.7 (4.30)	Luminaires with non-user replaceable light source		N/A
	If protective cover provide protection against electric shock and marked with "caution, electric shock risk" symbol:		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Minimum two fixing means		N/A
2.7 (4.31)	Insulation between circuits		N/A
	Circuits insulated from LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
	Controllable luminaires requiring same level of insulation for all components, the insulation between control terminals and LV supply fulfil requirements according 4.31.1 – 4.31.3		N/A
2.7 (4.31.1)	SELV circuits		P
	Used SELV source		P
	Voltage \leq ELV		P
	Insulating of SELV circuits from LV supply	Certificated SELV driver	P
	Insulating of SELV circuits from other non SELV circuits		N/A
	Insulating of SELV circuits from FELV		N/A
	Insulating of SELV circuits from other SELV circuits		N/A
	SELV circuits insulated from accessible parts according Table X.1		P
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Plugs and socket-outlets does not have protective conductor contact		N/A
2.7 (4.31.2)	FELV circuits		N/A
	Used FELV source		N/A
	Voltage \leq ELV		N/A
	Insulating of FELV circuits from LV supply		N/A
	FELV circuits insulated from accessible parts according Table X.1		N/A
	Plugs not able to enter socket-outlets of other voltage systems		N/A
	Socket outlets does not admit plugs of other voltage systems		N/A
	Socket-outlets does not have protective conductor contact		N/A
2.7 (4.31.3)	Other circuits		P
	Other circuits insulated from accessible parts according Table X.1		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Class II construction with equipotential bonding for protection against indirect contacts with live parts:		N/A
	- conductive parts are connected together		N/A
	- test according 7.2.3 of above		N/A
	- conductive part not cause an electric shock in case of an insulation fault		N/A
	- equipotential bonding in master/slave applications		N/A
	- master luminaire provided with terminal for accessible conductive parts of slave luminaires		N/A
	- slave luminaire constructed as class I		N/A
2.7 (4.32)	Overvoltage protective devices		N/A
	Comply with IEC 61643-11		N/A
	External to controlgear and connected to earth:		N/A
	- only in fixed luminaires		N/A
	- only connected to protective earth		N/A

2.8 (11)	CREEPAGE DISTANCES AND CLEARANCES		P
2.8 (11.2)	Creepage distances and clearances	See Table 1.7 (11.2)	N/A
	Working voltage (V)	Input: 200-240V	—
	Rated pulse voltage (kV).....	N/A	—
	Voltage form.....	Sinusoidal <input checked="" type="checkbox"/> Non- <input type="checkbox"/>	—
	PTI	Sinusoidal <input checked="" type="checkbox"/> ≥ 600 <input type="checkbox"/>	—
	Impulse withstand category (Normal category II)(Category III Annex U)	Category II <input checked="" type="checkbox"/> Category III <input type="checkbox"/>	—

2.9 (7)	PROVISION FOR EARTHING		
2.9 (7.2.1 + 7.2.3)	Accessible metal parts		N/A
	Metal parts in contact with supporting surface		N/A
	Resistance $< 0,5 \Omega$		N/A
	Self-tapping screws used		N/A
	Thread-forming screws		N/A
	Thread-forming screw used in a groove		N/A
	Earth makes contact first		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
	Protective earthing of the luminaire not via built-in control gear		N/A
2.9 (7.2.2 + 7.2.3)	Earth continuity in joints, etc.		N/A
2.9 (7.2.4)	Locking of clamping means		N/A
	Compliance with 4.7.3		N/A
	Terminal blocks with integrated screwless earthing contacts tested according Annex V		N/A
2.9 (7.2.5)	Earth terminal integral part of connector socket		N/A
2.9 (7.2.6)	Earth terminal adjacent to mains terminals		N/A
2.9 (7.2.7)	Electrolytic corrosion of the earth terminal		N/A
2.9 (7.2.8)	Material of earth terminal		N/A
	Contact surface bare metal		N/A
2.9 (7.2.10)	Class II luminaire for looping-in		N/A
	Double or reinforced insulation to functional earth		N/A
2.9 (7.2.11)	Earthing core coloured green-yellow		N/A
	Length of earth conductor		N/A
2.10 (14)	SCREW TERMINALS		N/A
	Separately approved; component list	{see Annex 1)	N/A
	Part of the luminaire	(see Annex 3)	N/A
2.10 (15)	SCREWLESS TERMINALS AND ELECTRICAL CONNECTIONS		P
	Separately approved; component list	{see Annex 1)	N/A
	Part of the luminaire	(see Annex 4)	P
2.11 (5)	EXTERNAL AND INTERNAL WIRING		
2.11 (5.2)	Supply connection and external wiring		P
2.11 (5.2.1)	Means of connection.....	Connecting leads	P
	Outdoor luminaire has not PVC insulated external wiring if not class III or SELV ≤ 25 V a.c./60 V d.c. or protected from outdoor environment		N/A
2.11 (5.2.2)	Type of cable.....	Certificated LED driver with supply cord	P

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Nominal cross-sectional area (mm ²).....:	Certificated LED driver with supply cord	P
	Cables equal to IEC 60227 or IEC 60245		N/A
2.11 (5.2.3)	Type of attachment, X, Y or Z		P
2.11 (5.2.5)	Type Z not connected to screws		P
2.11 (5.2.6)	Cable entries:		P
	- suitable for introduction		P
	- adequate degree of protection		P
2.11 (5.2.7)	Cable entries through rigid material have rounded edges		P
2.11 (5.2.8)	Insulating bushings:		P
	- suitably fixed		P
	- material in bushings		P
	- material not likely to deteriorate		P
	- tubes or guards made of insulating material		P
2.11 (5.2.9)	Locking of screwed bushings		N/A
2.11 (5.2.10)	Cord anchorage:		P
	- covering protected from abrasion		P
	- clear how to be effective		P
	- no mechanical or thermal stress		P
	- no tying of cables into knots etc.		P
	- insulating material or lining		P
2.11 (5.2.10.1)	Cord anchorage for type X attachment:		N/A
	a) at least one part fixed		N/A
	b) types of cable		N/A
	c) no damaging of the cable		N/A
	d) whole cable can be mounted		N/A
	e) no touching of clamping screws		N/A
	f) metal screw not directly on cable		N/A
	g) replacement without special tool		N/A
	Glands not used as anchorage		N/A
	Labyrinth type anchorages		N/A
2.11 (5.2.10.2)	Adequate cord anchorage for type Y and type Z attachment		P

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.11 (5.2.10.3)	Tests:		P
	- impossible to push cable; unsafe		P
	- pull test: 25 times; pull (N): 30		P
	- torque test: torque (Nm).....: 0,08		P
	- displacement ≤ 2 mm		P
	- no movement of conductors		P
	- no damage of cable or cord		P
	- function independent of electrical connection		P
2.11 (5.2.11)	External wiring passing into luminaire		P
2.11 (5.2.12)	Looping-in terminals		N/A
2.11 (5.2.13)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
2.11 (5.2.14)	Mains plug same protection		N/A
	Class III luminaire plug		N/A
	No unsafe compatibility		N/A
2.11 (5.2.16)	Appliance inlets (IEC 60320)		N/A
	Installation couplers (IEC 61535)		N/A
	Other appliance inlet or connector according relevant IEC standard		N/A
2.11 (5.2.17)	No standardized interconnecting cables properly assembled		N/A
2.11 (5.2.18)	Used plug in accordance with		N/A
	- IEC 60083		N/A
	- other standard		N/A
2.11 (5.3)	Internal wiring		P
2.11 (5.3.1)	Internal wiring of suitable size and type		P
	Through wiring		N/A
	- not delivered/ mounting instruction		N/A
	- factory assembled		N/A
	- socket outlet loaded (A):		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	- temperatures	(see Annex 2)	N/A
	Green-yellow for earth only		N/A
2.11 (5.3.1.1)	Internal wiring connected directly to fixed wiring		N/A
	Cross-sectional area (mm ²)		N/A
	Insulation thickness		N/A
	Extra insulation added where necessary		N/A
2.11 (5.3.1.2)	Internal wiring connected to fixed wiring via internal current-limiting device		P
	Adequate cross-sectional area and insulation thickness		P
2.11 (5.3.1.3)	Double or reinforced insulation for class II		N/A
2.11 (5.3.1.4)	Conductors without insulation		N/A
2.11 (5.3.1.5)	SELV current-carrying parts		P
2.11 (5.3.1.6)	Insulation thickness other than PVC or rubber		N/A
2.11 (5.3.2)	Sharp edges etc.		P
	No moving parts of switches etc.		N/A
	Joints, raising/lowering devices		N/A
	Telescopic tubes etc.		N/A
	No twisting over 360°		P
2.11 (5.3.3)	Insulating bushings:		N/A
	- suitable fixed		N/A
	- material in bushings		N/A
	- material not likely to deteriorate		N/A
	- cables with protective sheath		N/A
2.11 (5.3.4)	Joints and junctions effectively insulated		N/A
2.11 (5.3.5)	Strain on internal wiring		N/A
2.11 (5.3.6)	Wire carriers		N/A
2.11 (5.3.7)	Wire ends not tinned		N/A
	Wire ends tinned: no cold flow		P
2.12 (8)	PROTECTION AGAINST ELECTRIC SHOCK		P
2.12 (8.2.1)	Live parts not accessible		P

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Basic insulated parts not used on the outer surface without appropriate protection		P
	Basic insulated parts not accessible with standard test finger on portable, settable and adjustable luminaires		N/A
	Basic insulated parts not accessible with Ø 50 mm probe from outside, other types of luminaires		P
	Lamp and starterholders in portable and adjustable luminaires comply with double or reinforced insulation requirements		N/A
	Basic insulation only accessible under lamp or starter replacement		N/A
	Protection in any position		P
	Double-ended tungsten filament lamp		N/A
	Insulation lacquer not reliable		P
	Double-ended high pressure discharge lamp		N/A
	Relevant warning according to 3.2.18 fitted to the luminaire		N/A
2.12 (8.2.2)	Portable luminaire adjusted in most unfavourable position		N/A
2.12 (8.2.3.a)	Class II luminaire:		P
	- basic insulated metal parts not accessible during starter or lamp replacement		N/A
	- basic insulation not accessible other than during starter or lamp replacement	Certificated LED driver	P
	- glass protective shields not used as supplementary insulation		N/A
2.12 (8.2.3.b)	BC lampholder of metal in class I luminaires shall be earthed		N/A
2.12 (8.2.3.c)	SELV circuits with exposed current carrying parts:		P
	Ordinary luminaire:		P
	- touch current	0,03mA	P
	- no-load voltage.....	Max 42Vdc	P
	Other than ordinary luminaire:		N/A
	- nominal voltage		N/A
2.12 (8.2.4)	Portable luminaire have protection independent of supporting surface		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
2.12 (8.2.5)	Compliance with the standard test finger or relevant probe		P
2.12 (8.2.6)	Covers reliably secured		P
2.12 (8.2.7)	Discharging of capacitors $\geq 0,5 \mu\text{F}$		N/A
	Portable plug connected luminaire with capacitor		N/A
	Other plug connected luminaire with capacitor		N/A
	Discharge device on or within capacitor		N/A
	Discharge device mounted separately		N/A

2.13 (12)	ENDURANCE TEST AND THERMAL TEST		P
2.13.1 (-)	If IP > IP 20 relevant test of (12.4), (12.5) and (12.6) after (9.2) before (9.3) specified 4.13		—
2.13 (12.3)	Endurance test:		P
	- mounting-position	Recessed mounting	—
	- test temperature (°C)	35°C	—
	- total duration (h)	240h	—
	- supply voltage: Un factor; calculated voltage (V)	1,1 x 240V=264V	—
	- lamp used	Integral LED module	—
2.13 (12.3.2)	After endurance test:		P
	- no part unserviceable		P
	- luminaire not unsafe		P
	- no damage to track system		P
	- marking legible		P
	- no cracks, deformation etc.		P
2.13 (12.4)	Thermal test (normal operation)	(see Annex 2)	P
2.13 (12.5)	Thermal test (abnormal operation)	(see Annex 2)	P
2.13 (12.6)	Thermal test (failed lamp control gear condition):		N/A
2.13 (12.6.1)	Through wiring or looping-in wiring loaded by a current of (A)		—
	- case of abnormal conditions		—
	- electronic lamp control gear		N/A
	- measured winding temperature (°C): at 1,1 Un		—
	- measured mounting surface temperature (°C) at 1,1 Un		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	- calculated mounting surface temperature (°C) :		N/A
	- track-mounted luminaires		N/A
2.13 (12.6.2)	Temperature sensing control		N/A
	- case of abnormal conditions :		—
	- thermal link		N/A
	- manual reset cut-out		N/A
	- auto reset cut-out		N/A
	- measured mounting surface temperature (°C)..... :		N/A
	- track-mounted luminaires		N/A
2.13 (12.7)	Thermal test (failed lamp control gear in plastic luminaires):		N/A
2.13 (12.7.1)	Luminaire without temperature sensing control		N/A
2.13 (12.7.1.1)	Luminaire with fluorescent lamp ≤ 70W		N/A
	Test method 12.7.1.1 or Annex W :		—
	Test according to 12.7.1.1:		N/A
	- case of abnormal conditions :		—
	- Ballast failure at supply voltage (V) :		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
	Test according to Annex W:		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—
	- calculated temperature of fixing point/exposed part (°C) :		—
	Ball-pressure test..... :	See Table 2.16 (13.2.1)	N/A
2.13 (12.7.1.2)	Luminaire with discharge lamp, fluorescent lamp > 70W, transformer > 10 VA		N/A
	- case of abnormal conditions :		—
	- measured winding temperature (°C): at 1,1 Un :		—
	- measured temperature of fixing point/exposed part (°C): at 1,1 Un :		—

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	- calculated temperature of fixing point/exposed part (°C)		—
	Ball-pressure test.....	See Table 2.16 (13.2.1)	
2.13 (12.7.1.3)	Luminaire with short circuit proof transformers ≤ 10 VA		N/A
	- case of abnormal conditions		—
	- Components retained in place after the test		N/A
	- Test with standard test finger after the test		N/A
2.13 (12.7.2)	Luminaire with temperature sensing control		N/A
	- thermal link.....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- manual reset cut-out.....	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- auto reset cut-out	Yes <input type="checkbox"/> No <input type="checkbox"/>	—
	- case of abnormal conditions		—
	- highest measured temperature of fixing point/ exposed part (°C):		—
	Ball-pressure test:.....	See Table 2.16 (13.2.1)	N/A
2.13.1 (-)	Wiring, for connection to the supply, not reach unsafe temperature		N/A
	- measured temperature of the cable (°C)		N/A

2.14 (9)	RESISTANCE TO DUST, SOLID OBJECTS AND MOISTURE		P
2.14 (-)	If IP > IP 20 the order of tests as specified in clause 2.12		P
2.14 (9.2)	Tests for ingress of dust, solid objects and moisture:		—
	- classification according to IP	IP65	—
	- mounting position during test	Recessed mounting	—
	- fixing screws tightened; torque (Nm).....	N/A	—
	- tests according to clauses	9.2.0	—
	- electric strength test afterwards		N/A
	a) no deposit in dust-proof luminaire		N/A
	b) no talcum in dust-tight luminaire		N/A
	c) no trace of water on current-carrying parts or on insulation where it could become a hazard		N/A
	d) i) For luminaires without drain holes – no water entry		N/A
	d) ii) For luminaires with drain holes – no hazardous water entry		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	e) no water in watertight luminaire		N/A
	f) no contact with live parts (IP 2X)		P
	f) no entry into enclosure (IP 3X and IP 4X)		N/A
	f) no contact with live parts (IP3X and IP4X)		N/A
	g) no trace of water on part of lamp requiring protection from splashing water		N/A
	h) no damage of protective shield or glass envelope		N/A
2.14 (9.3)	Humidity test 48 h		P

2.15 (10)	INSULATION RESISTANCE AND ELECTRIC STRENGTH		P
2.15 (10.2.1)	Insulation resistance test		P
	Cable or cord covered by metal foil or replaced by covered by metal foil metal rod of mm Ø		—
	Insulation resistance (MΩ)		—
	SELV		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	>19 MΩ	P
	- between current-carrying parts and metal parts of the luminaire.....	>19 MΩ	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		N/A
	- between live parts of different polarity	Cerficated LED driver	N/A
	- between live parts and mounting surface		N/A
	- between live parts and metal parts.....		N/A
	- between live parts of different polarity through action of a switch		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
2.15 (10.2.2)	Electric strength test		P
	Dummy lamp		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
	Luminaires with ignitors after 24 h test		N/A
	Luminaires with manual ignitors		N/A
	Test voltage (V).....:		N/A
	SELV		P
	- between current-carrying parts of different polarity :		N/A
	- between current-carrying parts and mounting surface	500V	P
	- between current-carrying parts and metal parts of the luminaire.....:	500V	P
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
	Other than SELV		N/A
	- between live parts of different polarity		N/A
	- between live parts and mounting surface	Cerficated LED driver	N/A
	- between live parts and metal parts.....:		N/A
	- between live parts of different polarity through action of a switch.....:		N/A
	- between the outer surface of a flexible cord or cable where it is clamped in a cord anchorage and accessible metal parts		N/A
	- Insulation bushings as described in Section 5		N/A
2.15 (10.3)	Touch current or protective conductor current (mA):	0,03 mA	P

2.16 (13)	RESISTANCE TO HEAT, FIRE AND TRACKING		P
2.16 (13.2.1)	Ball-pressure test.....:	See Test Table 2.16 (13.2.1)	P
2.16 (13.3.1)	Needle-flame test (10 s)	See Test Table 2.16 (13.3.1)	N/A
2.16 (13.3.2)	Glow-wire test (850°C)	See Test Table 2.16 (13.3.2)	P
2.16 (13.4)	Proof tracking test (IEC 60112).....:	See Test Table 2.16 (13.4)	N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict

2.8 (11.2)	TABLES: Creepage distances and clearances						P	
Table 11.1	Minimum distances (mm) for a.c. (50/60 Hz) sinusoidal voltages							
RMS working voltage (V) not exceeding		50	150	250	500	750	1000	
Creepage distances								
Required basic insulation, PTI ≥ 600		0,6	0,8	1,5	3	4	5,5	
Measured		--	--	--	--	--	--	
Required basic insulation, PTI < 600		1,2	1,6	2,5	5	8	10	
Measured		--	--	4	--	--	--	
Required supplementary insulation PTI ≥ 600		-	0,8	1,5	3	4	5,5	
Measured		--	--	--	--	--	--	
Required supplementary insulation PTI < 600		-	1,6	2,5	5	8	10	
Measured		--	--	--	--	--	--	
Required reinforced insulation		-	3,2	5	6	8	11	
Measured		--	--	6	--	--	--	
Clearances								
Required basic insulation		0,2	0,8	1,5	3	4	5,5	
Measured		--	--	4	--	--	--	
Required supplementary insulation		-	0,8	1,5	3	4	5,5	
Measured		--	--	--	--	--	--	
Required reinforced insulation		-	1,6	3	6	8	11	
Measured		--	--	6	--	--	--	
Table 11.2	Minimum distances (mm) for non-sinusoidal pulse voltages							
Rated pulse voltage (peak kV)		2,0	2,5	3,0	4,0	5,0	6,0	8,0
Required clearances		1,0	1,5	2	3	4	5,5	8
Measured		--	--	--	--	--	--	--
Rated pulse voltage (peak kV)		10	12	15	20	25	30	40
Required clearances		11	14	18	25	33	40	60
Measured		--	--	--	--	--	--	--
Rated pulse voltage (peak kV)		50	60	80	100	-	-	-
Required clearances		75	90	130	170	-	-	-
Measured		--	--	--	--	--	--	--

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict

2.16 (13.2.1)	TABLE: Ball Pressure Test of Thermoplastics			P
Allowed impression diameter (mm):			2	—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Lens	See Annex 1	75	0,8	
Supplementary information:				

2.16 (13.3.1)	TABLE: Needle-flame test (IEC 60695-11-5)				N/A
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Supplementary information:					

2.16 (13.3.2)	TABLE: Glow-wire test (IEC 60695-2-11)				P
Glow wire temperature		850°C	—		
Object/ Part No./ Material	Manufacturer/ trademark	Duration of application of test flame (ta); (s)	Ignition of specified layer Yes/No	Duration of burning (tb) (s)	Verdict
Lens	See Annex 1	30s	No	12s	P
Any flame or glowing of the sample extinguished within 30 s of withdrawing the glow-wire, and any burning or molten drop did not ignite the underlying parts (Yes/No)					
Supplementary information:					

IEC60598_2_2D					
Clause	Requirement + Test			Result - Remark	Verdict
2.16 (13.4)	TABLE: Proof tracking test (IEC 60112)				N/A
Test voltage PTI				175 V	—
Object/ Part No./ Material	Manufacturer/ trademark	Withstand 50 drops without failure on three places or on three specimens			Verdict
Supplementary information:					

ANNEX 1 TABLE: Critical components information						
Object / part No.	Code	Manufacturer /trademark	Type / model	Technical data	Standard	Mark(s) of conformity ¹⁾
LED Driver	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042
Alternative	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042
Alternative	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042
Alternative	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042
Alternative	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042
Alternative	B	MEAN WELL ENTERPRISE S CO., LTD.	LPC-20-350	Input:220-240V~, 50/60Hz; Output: 9-48VDC, 350mA	IEC 61347-1 IEC 61347-2-13	TUV SUD/ N8A1512740 50042

IEC60598_2_2D						
Clause	Requirement + Test			Result - Remark		Verdict
External cable	B	TONGXIANG YUANHUA ELECTRIC CO LTD	UL1015	20AWG	IEC 61347-1 IEC 61347-2-13	Tested with appliance
Internal wire	B	TONGXIANG YUANHUA ELECTRIC CO LTD	UL1332	24AWG	IEC 61347-1 IEC 61347-2-13	Tested with appliance
Lamp shade	B	JIANGXI SHENG HUI OPTICAL TECHNOLOGY LIMITED COMPANY	LDF3580-800	564.5*564.5	IEC 60598-1 IEC 60598-2-2	Tested with appliance
LED	B	SHENZHEN GLORY SKY OPTOELECTRONIC CO.,LTD	4014	60MA,3.2V	IEC 62471	Tested with appliance
<p>Supplementary information:</p> <p>¹⁾ Provided evidence ensures the agreed level of compliance. See OD-CB2039.</p> <p>The codes above have the following meaning:</p> <p>A - The component is replaceable with another one, also certified, with equivalent characteristics</p> <p>B - The component is replaceable if authorised by the test house</p> <p>C - Integrated component tested together with the appliance</p> <p>D - Alternative component</p>						

IEC60598_2_2D							
Clause	Requirement + Test	Result - Remark	Verdict				
ANNEX 2	TABLE: Temperature measurements, thermal tests of Section 12		P				
	Type reference	LL-PINSPOT01-6W-930-65	—				
	Lamp used.....	Integral LED module	—				
	Lamp control gear used	Original	—				
	Mounting position of luminaire.....	Recessed mounting	—				
	Supply wattage (W)	:6,5	—				
	Supply current (A).....	:0,028	—				
	Calculated power factor	0,95	—				
	Table: measured temperatures corrected for $t_a = 25\text{ }^{\circ}\text{C}$:		P				
	- abnormal operating mode.....	Short-circuit output of LED driver	—				
	- test 1: rated voltage	N/A	—				
	- test 2: 1,06 times rated voltage or 1,05 times rated wattage.....	254,4V	—				
	- test 3: Load on wiring to socket-outlet, 1,06 times voltage or 1,05 times wattage	N/A	—				
	- test 4: 1,1 times rated voltage or 1,05 times rated wattage.....	264V	—				
	Through wiring or looping-in wiring loaded by a current of A during the test	N/A	—				
Temperature measurements, ($^{\circ}\text{C}$)							
Part	Ambient	Clause 12.4 – normal				Clause 12.5 – abnormal	
		test 1	test 2	test 3	limit	test 4	limit
Lamp cover (Front frosted)	25	--	36,8	--	90	--	--
Lamp cover (Back)	25	--	43,2	--	80	--	--
Lamp frame	25	--	45,1	--	90	--	--
Input wire of LED Driver	25	--	32,6	--	90	--	--
Output wire of LED Driver	25	--	39,0	--	90	--	--
LED Driver surface(T_c)	25	56,8	--	--	85	29,6	85
Connector	25	--	29,4	--	90	--	--
Mounting surface	25	--	45,8	--	90	26,1	130
Supplementary information:							

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
ANNEX 3	Screw terminals (part of the luminaire)		N/A
(14)	SCREW TERMINALS		N/A
(14.2)	Type of terminal..... :		—
	Rated current (A)..... :		—
(14.3.2.1)	One or more conductors		N/A
(14.3.2.2)	Special preparation		N/A
(14.3.2.3)	Terminal size		N/A
	Cross-sectional area (mm ²)..... :		—
(14.3.3)	Conductor space (mm)		N/A
(14.4)	Mechanical tests		N/A
(14.4.1)	Minimum distance		N/A
(14.4.2)	Cannot slip out		N/A
(14.4.3)	Special preparation		N/A
(14.4.4)	Nominal diameter of thread (metric ISO thread) M		N/A
	External wiring		N/A
	No soft metal		N/A
(14.4.5)	Corrosion		N/A
(14.4.6)	Nominal diameter of thread (mm)..... :		N/A
	Torque (Nm)..... :		N/A
(14.4.7)	Between metal surfaces		N/A
	Lug terminal		N/A
	Mantle terminal		N/A
	Pull test; pull (N)..... :		N/A
(14.4.8)	Without undue damage		N/A

ANNEX 4	Screwless terminals (part of the luminaire)		P
(15)	SCREWLESS TERMINALS		P
(15.2)	Type of terminal.....:	Screwless	—
	Rated current (A).....:	2A	—
(15.3.1)	Material		P
(15.3.2)	Clamping		P
(15.3.3)	Stop		P
(15.3.4)	Unprepared conductors		N/A

IEC60598_2_2D			
Clause	Requirement + Test	Result - Remark	Verdict
(15.3.5)	Pressure on insulating material		P
(15.3.6)	Clear connection method		P
(15.3.7)	Clamping independently		N/A
(15.3.8)	Fixed in position		P
(15.3.10)	Conductor size		P
	Type of conductor		P
(15.5.1)	Terminals internal wiring		P
(15.5.1.1)	Pull test spring-type terminals (4 N, 4 samples).....:		N/A
(15.5.1.2)	Pull test pin or tab terminals (4 N, 4 samples)4		P
	Insertion force not exceeding 50 N		P
(15.5.1.2)	Permanent connections: pull-off test (20 N)		N/A
(15.5.2)	Electrical tests		P
	Voltage drop (mV) after 1 h (4 samples).....:		P
	Voltage drop of two inseparable joints		P
	Number of cycles:		—
	Voltage drop (mV) after 10th alt. 25th cycle (4 samples)	8,7; 8,2; 8,3; 8,8	P
	Voltage drop (mV) after 50th alt. 100th cycle (4 samples)		N/A
	After ageing, voltage drop (mV) after 10th alt. 25th cycle (4 samples).....:	10,2; 10,3; 11,1; 9,8	P
	After ageing, voltage drop (mV) after 50th alt. 100th cycle (4 samples).....:		N/A
(15.6)	Terminals external wiring		N/A
	Terminal size and rating		N/A
(15.6.2.1)	Pull test spring-type terminals or welded connections (4 samples); pull (N)		N/A
	Pull test pin or tab terminals (4 samples); pull (N)		N/A

IEC60598_2_2D										
Clause	Requirement + Test								Result - Remark	Verdict
(15.6.3.1)	TABLE: Contact resistance test									P
	Voltage drop (mV) after 1 h									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop of two inseparable joints									P
	Voltage drop after 10th alt. 25th cycle									P
	Max. allowed voltage drop (mV).....:8,7; 8,2; 8,3; 8,8									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Voltage drop after 50th alt. 100th cycle									N/A
	Max. allowed voltage drop (mV).....:									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 10th alt. 25th cycle									P
	Max. allowed voltage drop (mV).....:10,2; 10,3; 11,1; 9,8									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										
	Continued ageing: voltage drop after 50th alt. 100th cycle									N/A
	Max. allowed voltage drop (mV).....:									—
terminal	1	2	3	4	5	6	7	8	9	10
voltage drop (mV)										N/A
										N/A
Supplementary information:										

Appendix 1: Additional requirements of IEC 62031:2008/A1:2014			
Clause	Requirement + Test	Result - Remark	Verdict
6	CLASSIFICATION		P
	Built-in module: Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Independent module: Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>		—
	Integral module: Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>		—
	For Integral module; Note to 1.2.1 in IEC 60598-1 applies.		P
13.2	Module withstands overpower condition >15 min. 150% rated voltage, thermally stabilised		P
	Module with automatic protective device or power limiter, test performed 15 min. at limit.		N/A
	During the tests, tissue paper, spread below module, does not ignite		P
14	TABLE: tests of fault conditions		P
Part	Simulated fault		Hazard
Single LED	Short-circuited: no work recoverable		No

Appendix 2: Additional requirements of IEC 62493:2015			
Clause	Requirement + Test	Result - Remark	Verdict
4	LIMITS		P
4.1	General		P
	Comply with Van der Hoofden test limit in 4.2.3 or inherently compliant in 4.2.2 and pass assessment procedure for intentional radiators		P
4.2	Unintentional radiating part of lighting equipment		P
4.2.2	Lighting equipment deemed to comply with the Van der Hoofden test without testing		P
	1) electronic controlgear	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	2) incandescent-lamp technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	3) LED-light-source technology	Yes <input checked="" type="checkbox"/> No <input type="checkbox"/>	—
	4) OLED-light-source technology	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	5) high-pressure discharge lamp LED-light-source technologies	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	6) low-pressure discharge lamp technologies with exposure distance ≥ 50 cm	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	7) independent auxiliary	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/>	—
	Not fulfil any of 1-7 above subject to 4.2.3		—
4.2.3	Applications of limits		N/A
	Not fulfil any of 1-7 in 4.2.2 but the compliance factor F is ≤ 1		N/A
4.3	Intentional radiating part of lighting equipment		N/A
	Comply with one of methods in Clause 7 if intentional radiator		N/A


Appendix 3: Additional requirements of IEC 62471:2006									
Clause		Requirement + Test		Result - Remark			Verdict		
Table 6.1		Emission limits for risk groups of continuous wave lamps						P	
		4014							
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W m^{-2}$	0,001	$4,8 \times 10^{-6}$	0,003	---	0,03	---
Near UV		E_{UVA}	$W m^{-2}$	10	$5,3 \times 10^{-4}$	33	---	100	---
Blue light	$B(\lambda)$	L_B	$W m^{-2} sr^{-1}$	100	0,14	10000	---	4000000	---
Blue light, small source	$B(\lambda)$	E_B	$W m^{-2}$	1,0*	$4,4 \times 10^{-1}$	1,0	---	400	---
Retinal thermal	$R(\lambda)$	L_R	$W m^{-2} sr^{-1}$	$28000/\alpha$	18	$28000/\alpha$	---	$71000/\alpha$	---
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W m^{-2} sr^{-1}$	$6000/\alpha$	0	$6000/\alpha$	---	$6000/\alpha$	---
IR radiation, eye		E_{IR}	$W m^{-2}$	100	0	570	---	3200	---
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian. ** Involves evaluation of non-GLS source									

Furthermore
Remarks:

1. Product information

LED	Manufacture	LED
	SHENZHEN GLORY SKY OPTOELECTRONIC CO.,LTD	4014; 60mA, 3,2V

2. Spectral Distribution:

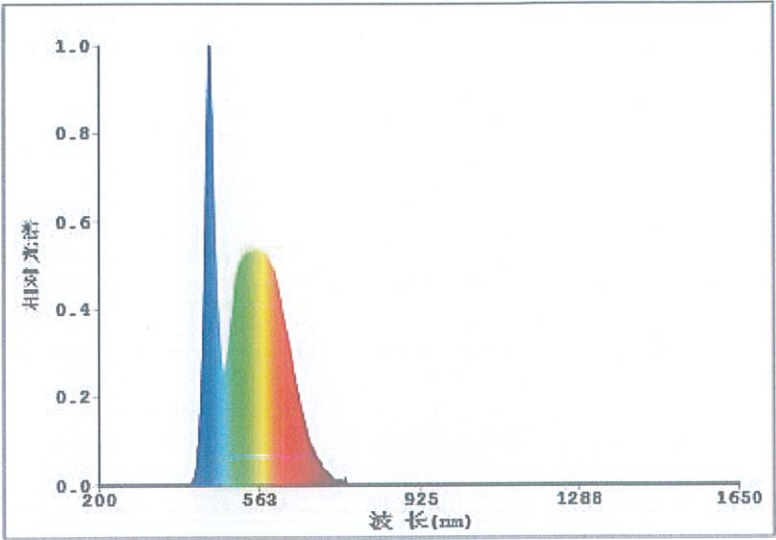

Appendix 4: Requirements of IEC/TR 62778: 2014			
Clause	Requirement + Test	Result - Remark	Verdict
7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		P
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		P
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		P
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as	<input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited	N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	-.. Risk Group 0 unlimited		P
	-.. Risk Group 1 unlimited		N/A
	- E_{thr} (lx) : Distance to reach RG1 (m) :		N/A


Appendix 4: Requirements of IEC/TR 62778: 2014

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------


TABLE: Spectroradiometric measurement			P	
	Measurement performed on:	<input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input checked="" type="checkbox"/> Luminaire		
	Model number..... :	LL-PINSPOT01-6W-930-65		
	Test voltage (V)..... :	230	—	
	Test current (mA)..... :	250	—	
	Test frequency (Hz)..... :	50	—	
	Ambient, t (°C) :	25	—	
	Measurement distance :	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	—	
	Source size :	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small : mm	—	
	Field of view :	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	—	
Item	Symbol	Units	Result	Remark
Correlated colour temperature	CCT	K	6166	
x/y colour coordinates			/	
Blue light hazard radiance	L _B	W/(m ² sr ¹)	4	
Blue light hazard irradiance	E _B	W/m ²	3,661	
Luminance	L	cd/m ²	4.911x10 ³	
Illuminance	E	lx	7047	
Supplementary information:				

Appendix 5: Photographs

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

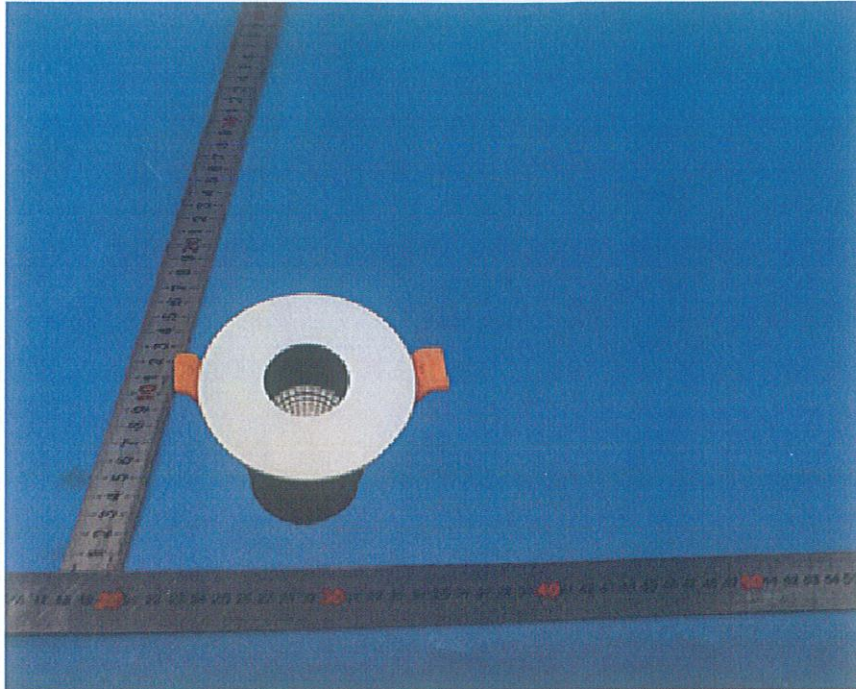

Overview (Model: LL-PINSPOT01-6W-930-65)

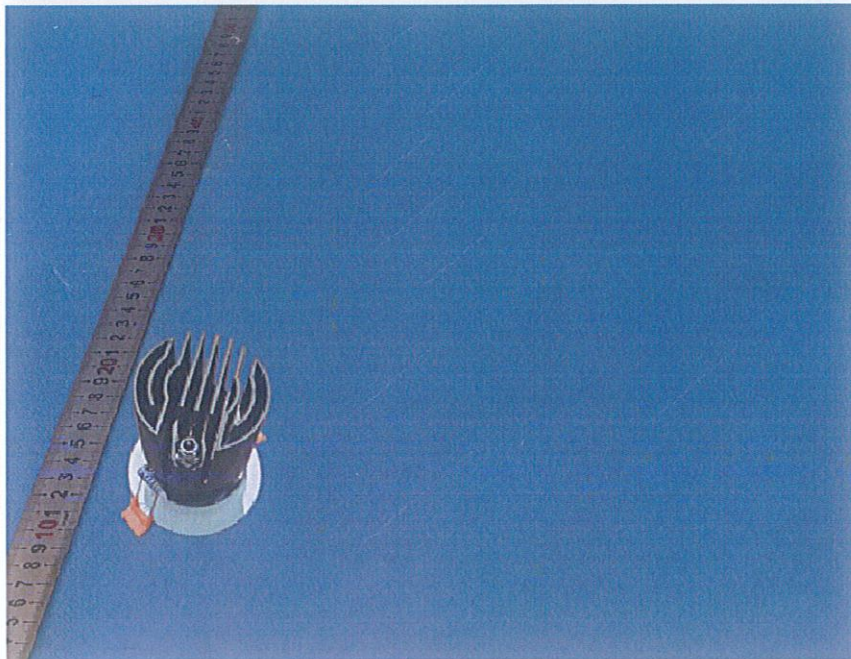

Backview