


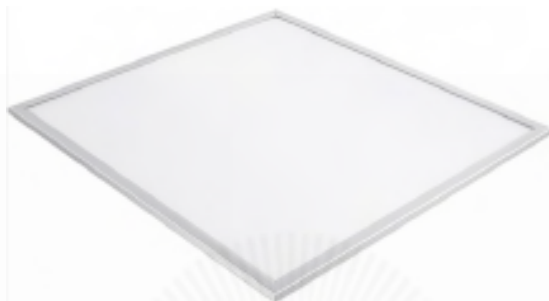



 **PNL60** is a recessed LED slim Panel with an opal PMMA diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different wattage, lumen, CRI and CCT option.

 **PNL60** è un pannello sottile a LED da incasso con un diffusore in PMMA opale per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Panel Light
Installation	Recessed
Housing	Aluminium
Processing	Powder Coated
Diffuser	Opal PMMA
Emergency Unit	On request
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

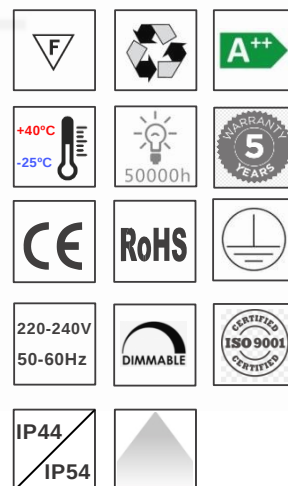




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

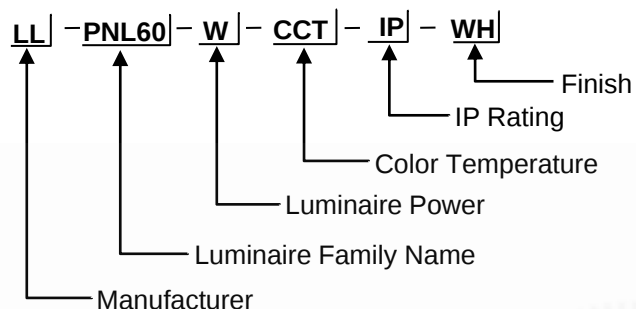

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 30	3000	100	>80
☐ 36	3600	100	>80
☐ 40	4000	100	>80
☐ 45	4500	100	>80

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☐ WIDE



FINISH



☐ WH-White

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCLED

bridgelux

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

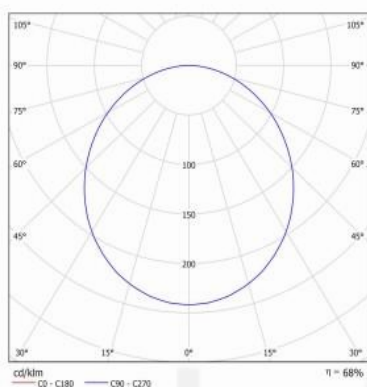

0.5	1.41	E(0°) E(C0)	54.6°	2708 264
1.0	2.81	E(0°) E(C0)	54.6°	677 66
1.5	4.22	E(0°) E(C0)	54.6°	301 29
2.0	5.63	E(0°) E(C0)	54.6°	189 18
2.5	7.04	E(0°) E(C0)	54.6°	108 11
3.0	8.44	E(0°) E(C0)	54.6°	75 7

Separación [m] Diámetro cónico [m] Intensidad luminica [lx]

— C0 - C180 (Semiángulo de dispersión: 109.2°)

3D MODULE

