

WALL UP/DOWN LIGHT



 **WL04** is the irradiation angle can be adjusted manually Mounting different locations with the products, put multiple splice angle, makes different lighting effects, using your imagination, kinds of radius shape frames, variety of colors. Users can change the frame freely.

 **WL04** è l'angolo di irradiazione che può essere regolato manualmente Montando posizioni diverse con i prodotti, inserendo più angoli di giunzione, realizzando diversi effetti di luce, usando la tua immaginazione, tipi di cornici a forma di raggio, varietà di colori. Gli utenti possono cambiare la cornice liberamente.

TECHNICAL DATA

Type	Surface Wall Mounted
Installation	Indoor/Outdoor
Housing	Die-cast aluminium
Processing	Powder Coating
Diffuser	Opal
Light Emission Direction	Symmetrical
Beam Angle	Adjustable
Glow Wire Test	850°
Safety Class	II
Driver	On/Off
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No






LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

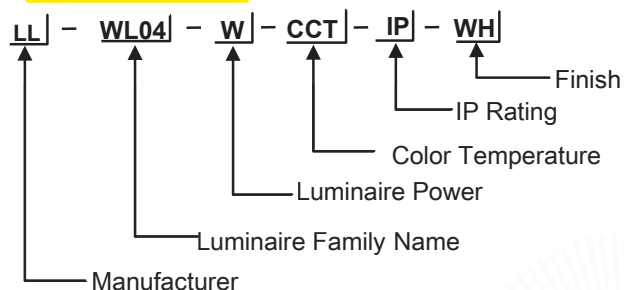

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	Colour Temperature (K)	CRI
2x2	400	100	3000	>90
2x3	600	100	3000	>90
2x6	1200	100	3000	>90
2x8	1600	100	3000	>90

COLOR TEMPERATURE OPTION



● 2700K ● 3000K ● 4000K ● 5000K ● 6000K

FINISH OPTION



CONTROL OPTION

DD

DALI DIM



DI

0-10V DIM



LED CHIPS

OSRAM



NICHIA

TRIDONIC



Panasonic

TCI LED

CITIZEN ELECTRONICS CO., LTD.

LED DRIVERS



TRIDONIC



OSRAM



TCI LED professional led applications


PHILIPS

Helvar



LA LUCE
LIGHT - DESIGN - MORE

PHOTOMETRIC

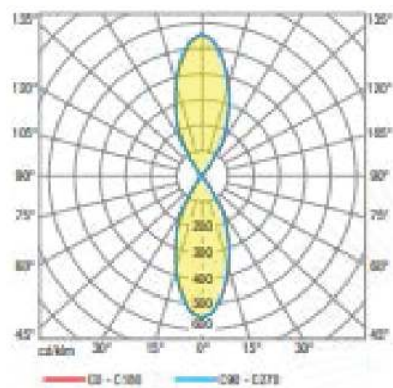

3D MODULE

