



Image:

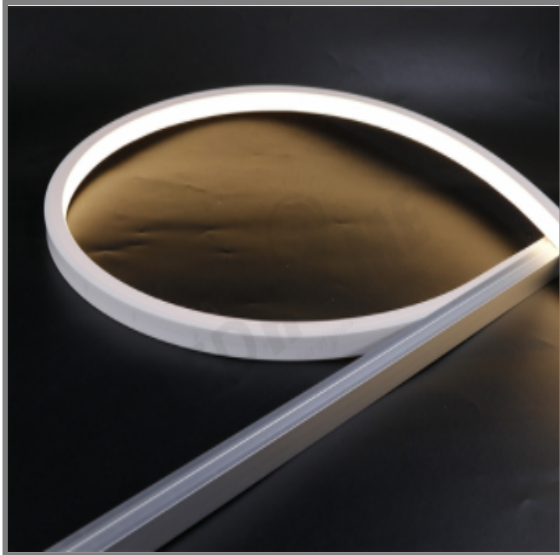

Dimension:

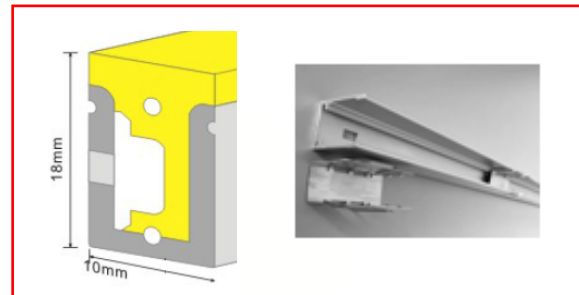

Channel with spring clip



Metal clip



Chain

Technical data	
Type	Linear Diffused
Installation position	Surface
Installation environment	Outdoor
LED Chip	Philips
Beam Angle	120°
Light distribution	Diffused
Power	7W/m LED
Source lumens	600Lm
Frequency	50 - 60 Hz
CCT / Tone	2700K / 3000K / 4000K
Colour rendering index	80 Ra
AC / DC	24V DC
Energy class	A++
Safety class	II
IP	IP67
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
Operating temperature	-30°C / +55°C
Driver included	Remote driver required

Outgoing Cable Method




Side cable output



Bottom cable output



Front cable output



end cap

Finishing casing	
Material	Silicon/Aluminum Profile
Colour	/
Processing	/

Finishing diffuser	
Material	Acrylic
Colour	White
Processing	Silk-screening

Photometric

