


Image:



Dimension:

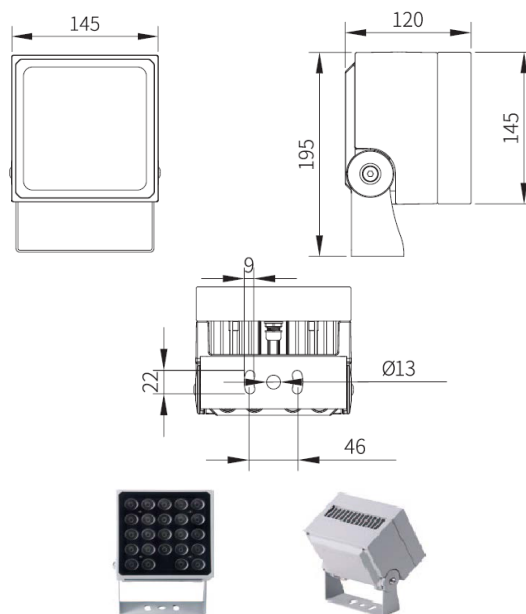

Technical data

Type	Floodlight
Installation position	Surface mounted
Installation environment	Outdoor
LED Chip	High Power SMDs
Beam Angle	8.8° / 12° / 25°
Light distribution	Symmetric
Power	55W LED
Source lumens	5500Lm
Frequency	50 - 60 Hz
CCT / Tone	2700K / 3000K / 4000K
Colour rendering index	80 Ra
AC / DC	AC 100-305V
Energy class	A++
Safety class	II
IP	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
Operating temperature	-30°C / +55°C


Finishing casing

Material	Die cast aluminium housing, Stainless steel external screws
Colour	White / Black / Gray
Processing	Powder coating

Finishing diffuser

Material	Clear safety glass
Colour	Transparent
Accessories	Anti glare louver (available seocrately)

Photometric

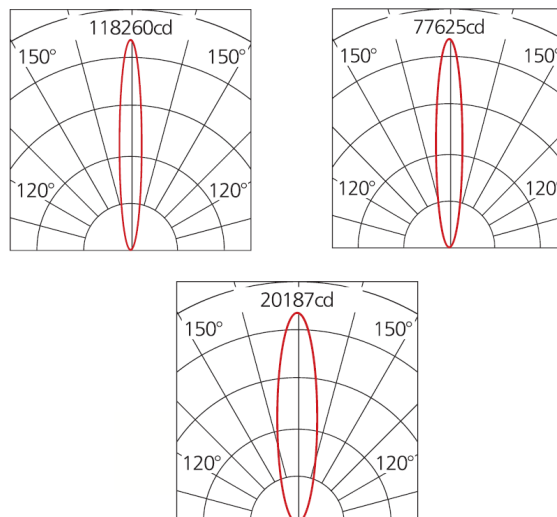

No accumulation of dust & water on surface glass



Breathable waterproof vent

