

FLUA®



LOUSA



Flexibility, elegance and usability are key words to describe FLUA classic luminaire LOUSA. This splendid wide-range collection has been already specified in many outdoor projects worldwide. Flexible to use due to its adjustable head, LOUSA was especially designed to provide perfect light effect for any landscape. Best choice for walkways, trees, sculptures or other landscape applications. Available in 5 different dimensions, each model could be installed with spike or installation plate.

Product classification
Model

Exterior
LOUSA


Installation information

Area	Garden
Method	Surface Mounted
Cut hole size	/
Embedded height	/

Technical general

System power	6W / 9W / 11W / 12W / 15W / 20W
Flux (lm)	654 / 981 / 1200 / 1308 / 1635 / 2180
Beam angle	25° / 40° / 60°
Material	Die cast aluminum body and bracket
Diffuser	4mm thickness tempered clear glass
Appearance color	Black / Gray / White / Brown / As per request
Accessories	Fixing screws made of stainless steel STS316
Adjustable angle	Available
Ingress protection	IP65
Input voltage	AC220V
Electrical level	Class II
Impact Protection	IK 09
Operating Temperature	-20°C ~ +50°C
Warranty	5 Years

Photometric graph

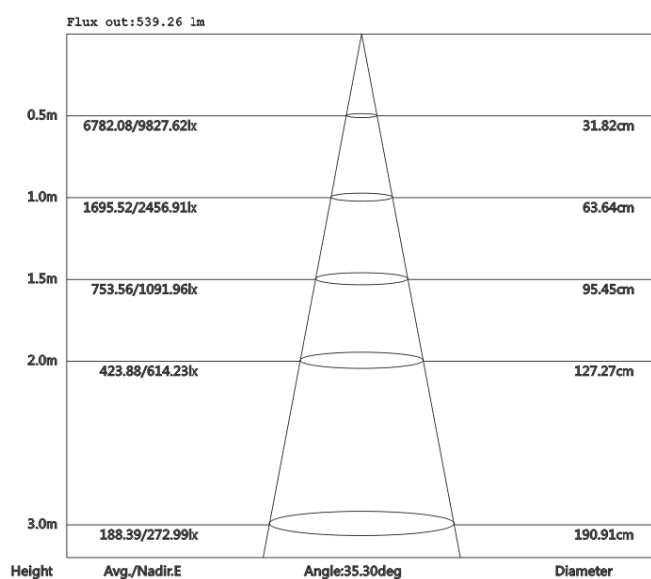

Electrical parameters

Electrical installation

Build in

Dimming mode

/

Light source parameters

Type

COB

Light color

WW

Color temperature

3000K

CRI

>80

LED Lifetime

50000h L95 B10 (Ta 25°C)

Other options

Color temperature

4000K 5000K

Accessories

Available as per request.



Line Drawing

