





 **DL08** is a recessed LED Downlight with a clear glass diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **DL08** è un faretto da incasso a LED con un diffusore in vetro trasparente per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	No

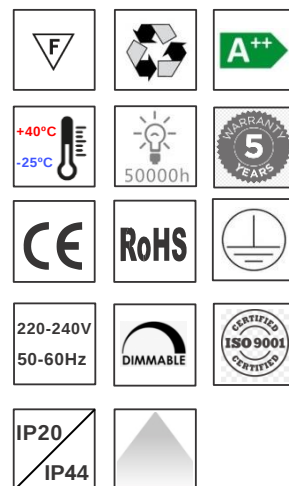




LA LUCE

LIGHT - DESIGN - MORE


CODE: LL-DL04-16W-827-44-WH

MODEL CODE

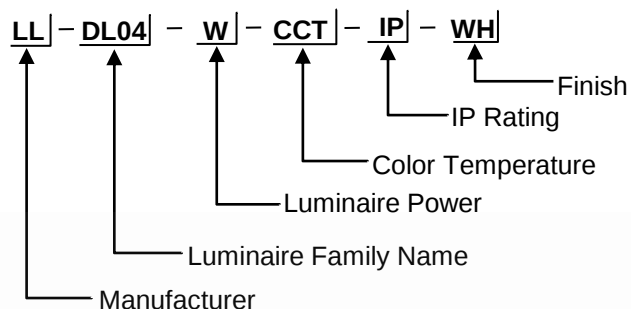

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 8	920	115	>80
☐ 10	1150	115	>80
☐ 12	1380	115	>80
☐ 15	1725	115	>80
☐ 16	1840	115	>80

COLOR TEMPERATURE OPTION

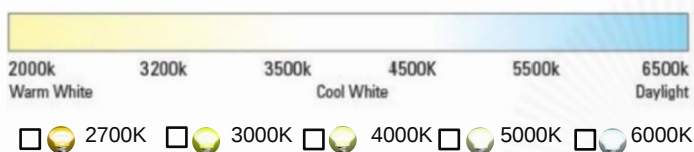

BEAM ANGLE OPTION



FINISH OPTION



CONTROL OPTION

- ☐ DD DALI DIM 
- ☐ D1 0-10V DIM 
- ☐ PD Phase Cut DIM 
- ☐ D0 On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
ADVANCING LIGHT AND LIFE™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

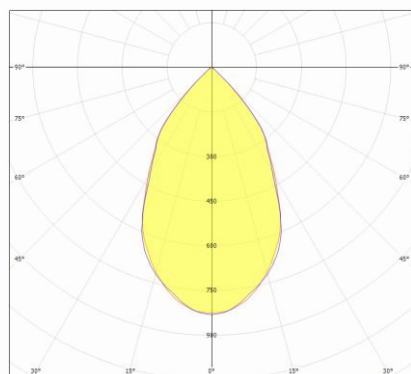

3D MODULE

