



 **WPF** LED Weatherproof luminaire is high efficient for indoor and outdoor installation is ideal for parking, substation. and LED Weatherproof luminaire is available in different standard length and wattage.

 **WPF** L'illuminazione a LED resistente alle intemperie è ad alta efficienza per l'installazione interna ed esterna è ideale per parcheggi, sottostazioni. e l'apparecchio LED Weatherproof è disponibile in diverse lunghezze e potenze standard.

TECHNICAL DATA

Type	Oval Bulkhead
Installation	Surface
Housing	Polycarbonate
Processing	Coated
Diffuser	Polycarbonate
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No






LA LUCE

LIGHT - DESIGN - MORE


CODE: LL-WPF-30W-940-66-GR

MODEL CODE

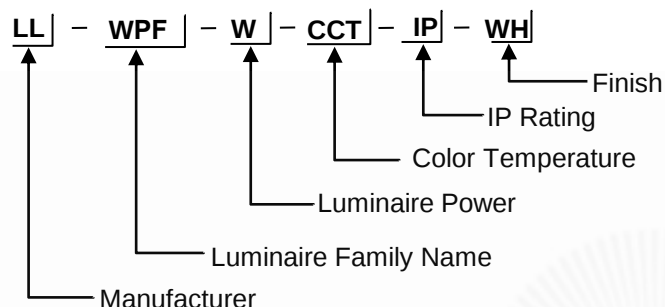

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 20	2000	100	>90
☐ 30	3300	110	>90
☐ 36	3960	110	>90
☐ 40	4400	110	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☒ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☒ WIDE



FINISH OPTION



☒ WH-White ☐ GR-Grey ☐ BR-Black

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☒ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

bridgelux

CITIZEN ELECTRONICS CO., LTD.

TCI LED

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLE RISE

LA LUCE



TCI LED

PHILIPS

more information in www.la-luce.it

PHOTOMETRIC

AVERAGE BEAM ANGLE(50%): 123.0 DEG

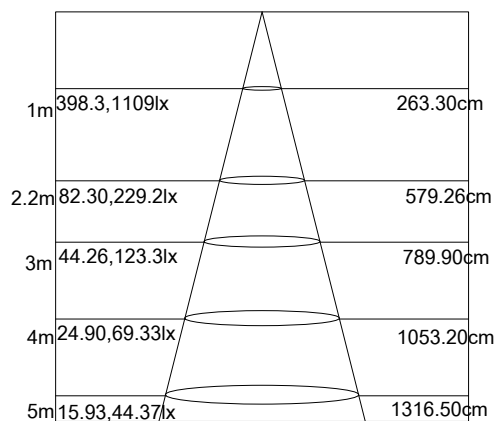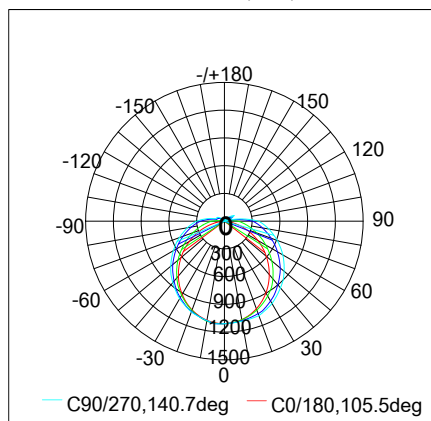

3D MODULE

