




 **UND138** is recessed fixtures suitable for installation in swimming pools and fountains up to a depth of 10 m with white or blue light, or in an RGB version. UND135 satisfies a variety of lighting needs thanks to its extensive range of optics with 5°/10°/15°/30°/45°/60° and asymmetric optics.

 **UND138** è un apparecchio da incasso adatto all'installazione in piscine e fontane fino a 10 m di profondità con luce bianca o blu, oppure in versione RGB. UND135 soddisfa una varietà di esigenze di illuminazione grazie alla sua vasta gamma di ottiche con ottiche 5 °/10 °/15 °/30 °/45 °/60 ° e asimmetriche.

TECHNICAL DATA

Type	Underground / Underwater
Installation	Recessed
Housing	Stainless Steel SUS 304/316L
Diffuser	Tempered Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	III
Gasket	Molding Shape Silicon Seal
Cable Gland	Nickel Coated Copper/ABS
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Mounting Sleeve	ABS/PVC
Adjustable	No

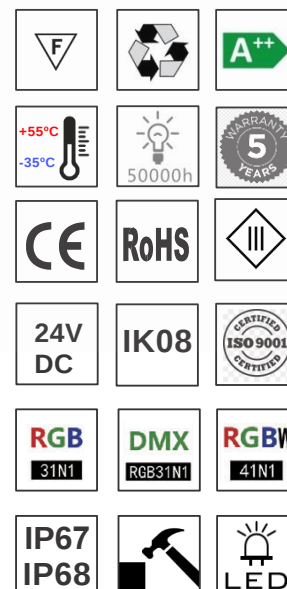




LA LUCE

LIGHT - DESIGN - MORE


CODE: UND138-6W-830-67-SS

MODEL CODE

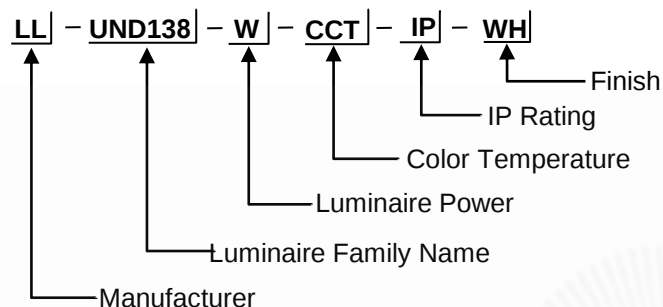

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 1x6	540	90	>80
☐ 1x10	900	90	>80
☐ 1x18	1620	90	>80
☐ 1x20	1800	90	>80

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric



FINISH OPTION



SS-Stainless Steel

CONTROL OPTION

- | | | |
|-----------------------------|---------------|--|
| ☐ DD | DALI DIM | |
| ☐ D1 | 0-10V DIM | |
| ☐ PD | Phase Cut DIM | |
| ☐ D0 | On/Off | |

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

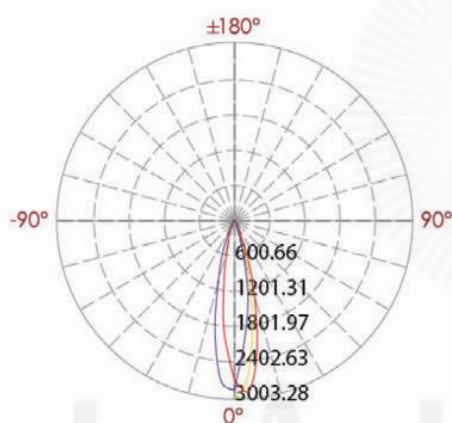

3D MODULE

