





 **GLLS** is a LED track luminaire with a wide range of uses – for the lighting of specific objects in commercial, retail, and public spaces, galleries, and showrooms with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **GLLS** è un apparecchio a binario a LED con una vasta gamma di usi: per l'illuminazione di oggetti specifici in spazi commerciali, al dettaglio e pubblici, gallerie e showroom con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Track Light
Installation	Surface/Suspended/Recessed
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Yes

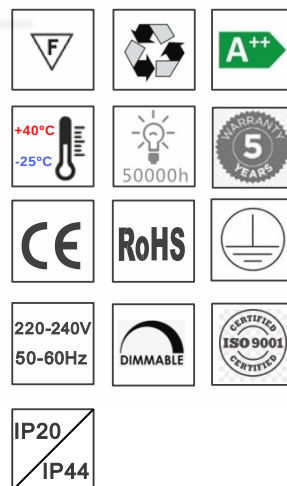




LA LUCE

LIGHT - DESIGN - MORE


CODE: LL-GLLS50-10W-927-20-WH

MODEL CODE

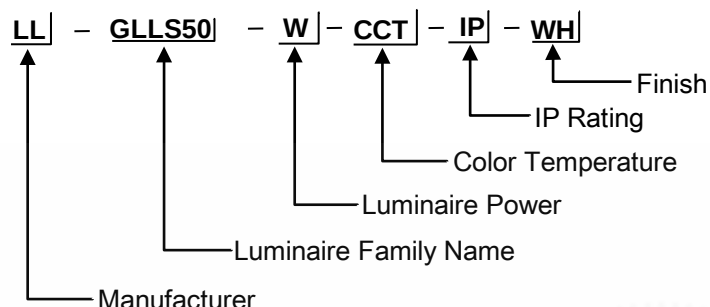

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 5	544	109	>90
☐ 7	763	109	>90
☐ 10	1090	109	>90
☐ 12	1308	109	>90
☐ 14	1526	109	>90
☐ 15	1635	109	>90
☐ 20	2180	109	>90

COLOR TEMPERATURE

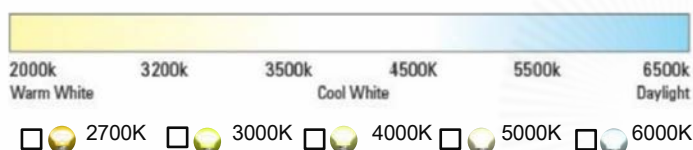

BEAM ANGLE OPTION

☐ 10° ☐ 18° ☐ 24° ☐ 36° ☐ 60°



FINISH OPTION



CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM
- ☐ D0 On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
bridging light and life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




professional led applications

PHILIPS


Helvar

OSRAM

PHOTOMETRIC

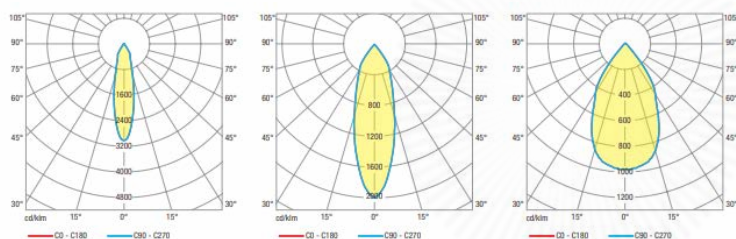

3D MODULE



Suspension kit with 1.5m wire
Colour
White/Black



1M track actual one meter.(1000mm)

2M track actual two meter.(2000mm)

3M track actual three meter.(3000mm)

Colour
White/Black



Mini joiner

A low profile connect to join two
Two straight track sections end-to-end
Colour
White/Black



Live-end connector

To start a run
Colour
White/Black



Straight connector

To connect two track sections end-to-end. it provides a center feed option
Colour
White/Black



"L" connector

To connect two track sections at a 90° angle
Colour
White/Black



End cap connects

To the track sections end
Colour
White/Black



"T" connector

To connect three track sections into a T configuration
Colour
White/Black

more information in www.la-luce.it