


Image:



Diemention:

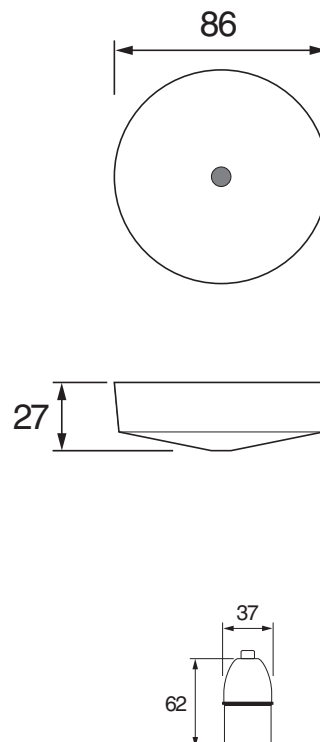

## Technical data

Voltage Rating	250 VAC
Installation position	Ceiling
Installation environment	Indoor
Maximum power rating	150 Watts
Terminal Capacity	Live, Neutral & earth
	4 x 1.0mm <sup>2</sup>
	3 x 1.5mm <sup>2</sup>
	1 x 2.5mm <sup>2</sup>
Ambient Operating Temperature	-5°C to +40°
IP Rating	IP4X
Max.Installation Altitude	2000 Mtrs
Max.Current Rating	6 Amps

## Features

### ShockGuard™

- >- Automatically shields the contacts as soon as the lamp is removed
- >- The contacts remain shielded until a new lamp is slotted into place
- >- While there is no lamp in place there is no danger of electrocution

### Ceiling roses™

- >- Clear base and pre-cut aperture for ease of installation
- >- Clear markings
- >- Terminal layout allows cables to be cut to even length
- >- Terminal layout allows cables to be cut to even length
- >- Earth terminal point used for easier cable access
- >- Halo (K1163WHI) available to give professional finish on damaged ceilings (for use with ceiling roses and pendant sets only)

Ceiling Rose:



Standard Lampholder

