
LED POLE LIGHT

Item Code: LL-YLM-009



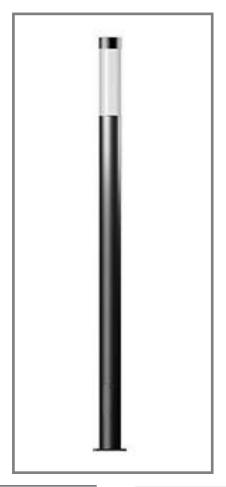

| Technical data | | | |
|--------------------------|---------------|--------|----------------|
| Туре | | | Pole |
| Installation position | | | Ground lights |
| Installation environment | | | Outdoor |
| LED | | | COB |
| Light emission direction | | | Downward |
| No. of Leds | Power | Lumen | ССТ |
| 14 | 40W | 4400Lm | 4000K |
| 14 | 40W | 4160Lm | 3000K |
| 18 | 45W | 4320Lm | 3000K |
| 18 | 50W | 5200Lm | 3000K |
| Frequency | | | 50 - 60 Hz |
| Colour rendering index | | | 90 Ra |
| AC / DC | | | 230V/240V-50Hz |
| Energy class | A++ | | |
| Safety class | 1 | | |
| IP | | | IP67 |
| IK | | | IK10 |
| Glow wire test | | | 850° |
| CE | | | Yes |
| Operating temperate | -30°C to 55°C | | |
| Driver included | | | Driver |

| Material Specifications | | |
|--|--|--|
| Die-cast aluminum 4mm thick powder coated. | | |
| Height 4000mm | | |
| | | |

| Diffuser Finish | | | |
|-----------------|---------------|--|--|
| Diffuser | Polycarboante | | |
| Colour | Opal | | |

| Accessories | |
|-------------|--|
| Mounting | M16 Anchor bolts to be ordered separtely |
| Anchor | Baseplate masking cover |

Finish Options

| Antracite - RAL 7016 | Antracite - RAL 7016 | Black - RAL 9011 |
|----------------------|----------------------|------------------|
| | | |

