





 **DUO GIMBAL** is Outstanding lighting fixture and provides a consistent ceiling appearance whilst gimbal slot provides the maximum adjustment in this type of small fixture. Application areas: residential, museums, retail, hotels.

 **DUO GIMBAL** è un apparecchio di illuminazione eccezionale e fornisce un aspetto coerente del soffitto mentre lo slot del giunto cardanico fornisce la massima regolazione in questo tipo di piccolo apparecchio. Ambiti di applicazione: residenziale, musei, retail, hotel.

## TECHNICAL DATA

|                                             |                                           |
|---------------------------------------------|-------------------------------------------|
| Type                                        | Gimbal Spotlight                          |
| Installation                                | Recessed Downlight                        |
| Housing                                     | Die-cast Aluminium                        |
| Processing                                  | Powder Coated                             |
| Diffuser                                    | Safety Glass with Special Anti Glare Lens |
| Light Emission Direction                    | Symmetrical                               |
| Glow wire test                              | 850°                                      |
| Safety Class                                | I                                         |
| Direct Mounting on Normal Flammable Surface | Yes                                       |
| Driver Included                             | Remote                                    |
| Adjustable                                  | No                                        |

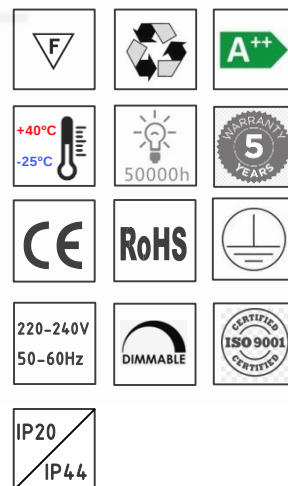




# LA LUCE


LIGHT - DESIGN - MORE

## MODEL CODE

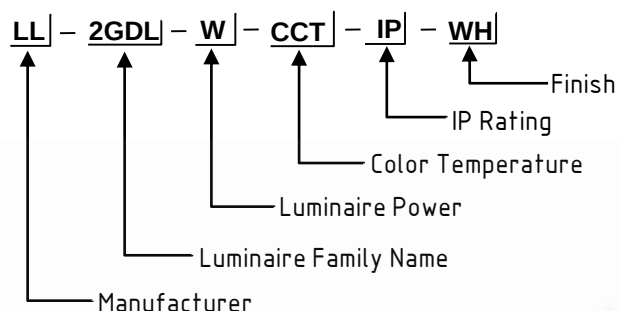

| System Wattage (W)            | Lumen Output (lm) | Luminaire Efficacy (lm/W) | CRI |
|-------------------------------|-------------------|---------------------------|-----|
| <input type="checkbox"/> 7x2  | 1680              | 120                       | >90 |
| <input type="checkbox"/> 10x2 | 2400              | 120                       | >90 |
| <input type="checkbox"/> 12x2 | 2880              | 120                       | >90 |
| <input type="checkbox"/> 15x2 | 3600              | 120                       | >90 |

## COLOR TEMPERATURE

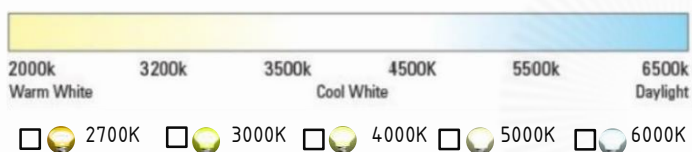

## BEAM ANGLE OPTION

☐ 10°   ☐ 18°   ☐ 24°   ☐ 30°   ☐ 45°   ☐ 50°



## FINISH OPTION




## CONTROL OPTION

- ☐ DD      DALI DIM
- ☐ D1      0-10V DIM
- ☐ PD      Phase Cut DIM
- ☐ D0      On/Off

## LED CHIPS



more information in [www.la-luce.it](http://www.la-luce.it)



# LA LUCE

LIGHT - DESIGN - MORE

## LED DRIVERS



TRIDONIC



DONE






TCI<sup>LED</sup>  
professional led applications

PHILIPS

Helvar

OSRAM

## PHOTOMETRIC



## 3D MODULE



# LA LUCE

LIGHT - DESIGN - MORE