


 **BL600SQ2** is an elegant lighting element that is suitable for both modern and classic architecture. Ideal for creating visual guidance with exceptional visual comfort with different heights, wattage, lumen, CRI, and CCT options.

 **BL600SQ2** è un elegante elemento di illuminazione adatto sia all'architettura moderna che a quella classica. Ideale per creare una guida visiva con un comfort visivo eccezionale con diverse opzioni di altezza, potenza, lumen, CRI e CCT.

## TECHNICAL DATA

|                                             |                          |
|---------------------------------------------|--------------------------|
| Type                                        | Decorative Bollard Light |
| Installation                                | Ground Surface           |
| Housing                                     | Die-cast aluminium       |
| Processing                                  | Powder Coated            |
| Diffuser                                    | PMMA / Frosted           |
| Light Emission Direction                    | Symmetrical              |
| Glow wire test                              | 850°                     |
| Safety Class                                | I                        |
| Direct Mounting on Normal Flammable Surface | Yes                      |
| Driver Included                             | Yes                      |
| Adjustable                                  | No                       |

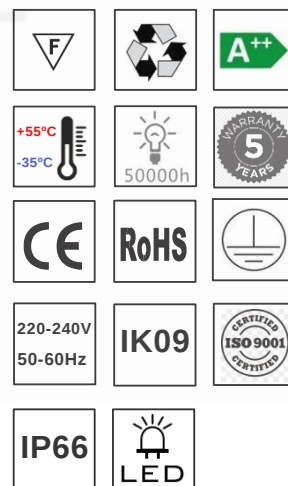




# LA LUCE


LIGHT - DESIGN - MORE

## MODEL CODE

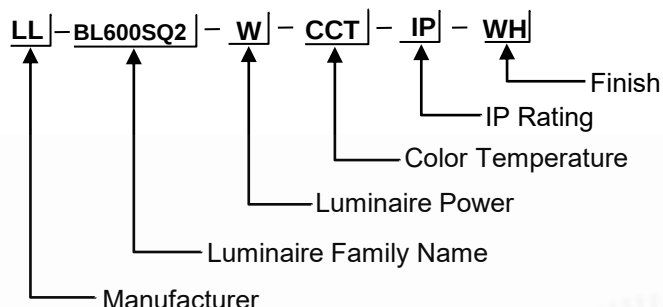

| System Wattage (W)          | Lumen Output (lm) | Luminaire Efficacy (lm/W) | CRI |
|-----------------------------|-------------------|---------------------------|-----|
| <input type="checkbox"/> 5  | 475               | 95                        | >90 |
| <input type="checkbox"/> 8  | 760               | 95                        | >90 |
| <input type="checkbox"/> 10 | 950               | 95                        | >90 |
| <input type="checkbox"/> 13 | 1235              | 95                        | >90 |
| <input type="checkbox"/> 18 | 1710              | 95                        | >90 |

## COLOR TEMPERATURE OPTION



☐ 2700K   ☐ 3000K   ☐ 4000K   ☐ 5000K   ☐ 6000K

## FINISH OPTION



☐ NI-Nickel   ☐ BL - Black   ☐ GR-Grey

## CONTROL OPTION

- ☐ DD      DALI DIM
- ☐ D1      0-10V DIM
- ☐ PD      Phase Cut DIM
- ☐ D0      On/Off



## LED CHIPS

**OSRAM**

**CREE**

**TRIDONIC**

**TCIE**  
LED

**SEOUL**

**Panasonic**

**bridgelux**  
Advancing Light and Life™

**NICHIA**

**LUMINUS**

CITIZEN ELECTRONICS CO., LTD.

**LUMILEDS**

## LED DRIVERS

**MW**  
MEAN WELL

**TRIDONIC**

**EAGLE RISE**

**DONE**

**LA LUCE**  
LIGHT - DESIGN - MORE

**TCIE**  
LED


**PHILIPS**

**Helvar**

**OSRAM**

more information in [www.la-luce.it](http://www.la-luce.it)

## PHOTOMETRIC

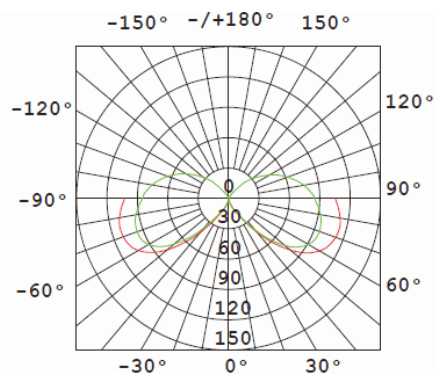

## LINE DRAWING

