



 **MNF01** is a compact drive-over and walk over inground recessed LED luminaire designed for illuminating building facades, green areas, parks and outdoor facilities. With the use of high-power LEDs, the in-ground light range provides high luminosity at a low power consumption.

 **MNF01** è un compatto apparecchio da incasso a LED da incasso carrabile e calpestabile progettato per l'illuminazione di facciate di edifici, aree verdi, parchi e strutture esterne. Con l'uso di LED ad alta potenza, la gamma di luci da incasso a pavimento fornisce un'elevata luminosità a un basso consumo energetico.

TECHNICAL DATA

Type	Inground Uplight
Installation	Recessed
Housing	Die-cast aluminum Stainless steel 316 Cover
Processing	Powder Coated
Diffuser	Tempered safety glass
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Gland	IP68 PVC

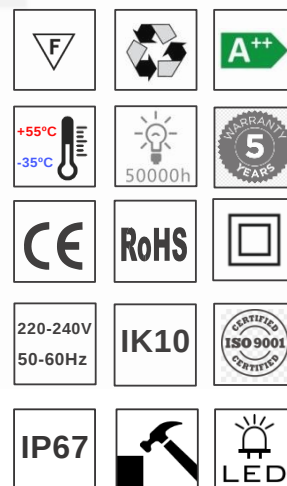




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

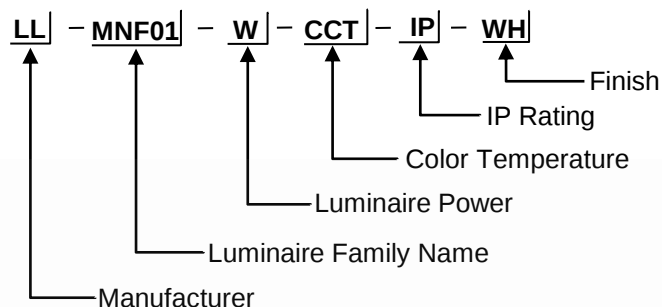

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 3	315	105	>80
☐ 5	525	105	>80
☐ 7	735	105	>80
☐ 9	945	105	>80
☐ 12	1260	105	>80

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 10° ☐ 15° ☐ 18° ☐ 25° ☐ 30° ☐ 45°



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☒ D0

On/Off

FINISH OPTION



☐ SS-Stainless Steel



☐ PPG



☐ GR-Grey

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

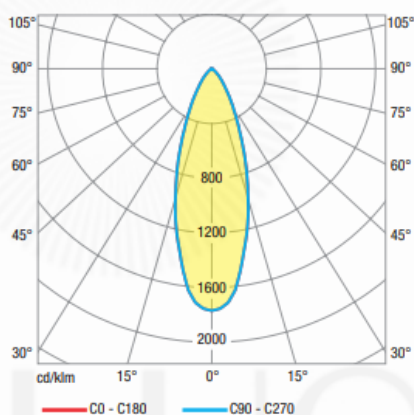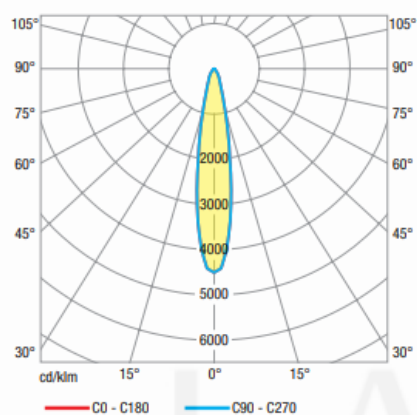

3D MODULE

