





 **LNRR** is a Recessed linear luminaire has a minimalist appearance emphasizes architectural details in a discreet way, offers a diffused and homogeneous light emission without shadows with different length, wattage, lumen, beam angle, CRI, and CCT option.

 **LNRR** è un apparecchio lineare da incasso ha un aspetto minimalista enfatizza i dettagli architettonici in modo discreto, offre un'emissione di luce diffusa e omogenea senza ombre con diverse opzioni di lunghezza, potenza, lumen, fascio, CRI e CCT.

TECHNICAL DATA

Type	Linear Inground
Installation	Recessed
Housing	Die-cast Aluminium Stainless Steel frame
Processing	Powder Coated
Diffuser	Tempered Safety Glass with Anti Glare Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Gasket	Molding shape silicon seal
Cable Gland	Nickel coated copper/ABS
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In/Remote
Adjustable	No

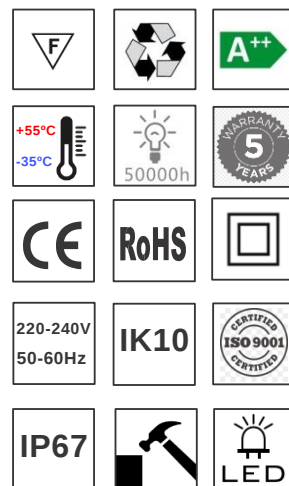





LA LUCE

LIGHT - DESIGN - MORE

MODEL CODE

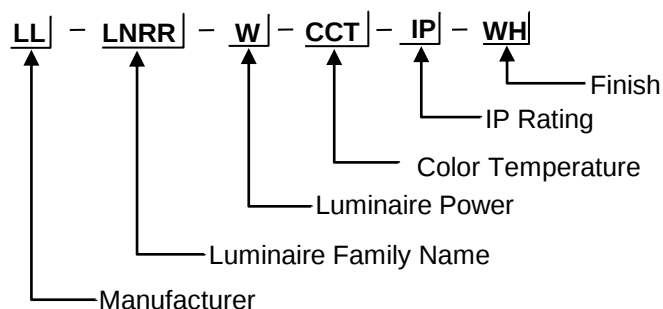

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric



FINISH OPTION



☐ SS-Stainless Steel ☐ PPG ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM
☐ D1 0-10V DIM
☐ PD Phase Cut DIM
☐ D0 On/Off



LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 8	920	115	>90
☐ 12	1380	115	>90
☐ 15	1725	115	>90
☐ 18	2070	115	>90
☐ 22	2530	115	>90
☐ 25	2875	115	>90
☐ 32	3680	115	>90
☐ 36	4140	115	>90
☐ 40	4600	115	>90
☐ 48	5520	115	>90

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

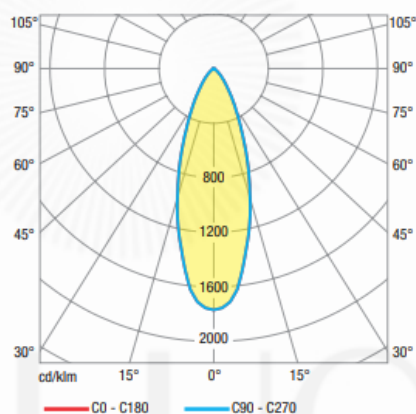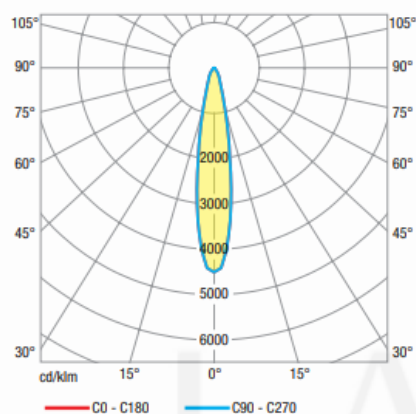

3D MODULE

