




 **FL05** is a high output LED floodlight with mounting brackets for mounting to a wall, ceiling, cross-arm, or supporting structures. Glare-free and available with asymmetrical or rotationally symmetrical optics. Ideally suited as a spotlight for accent light from a large distance or as a floodlight for the illumination of large building elements and sculptures. wattage, lumen, beam angle, CRI, and CCT option.

FL05 è un proiettore a LED ad alto rendimento con staffe di montaggio per il montaggio a parete, soffitto, braccio trasversale o strutture di supporto. Antiabbagliamento e disponibile con ottica asimmetrica o rotazionalmente simmetrica. Ideale come faretto per luce d'accento da grande distanza o come proiettore per l'illuminazione di grandi elementi da costruzione e sculture. opzione potenza, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Floodlight
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Tempered Safety Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	Yes

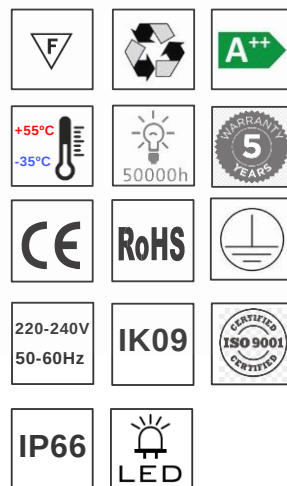




LA LUCE

LIGHT - DESIGN - MORE


Code: LL-FL05-34W-830-66-AL

MODEL CODE

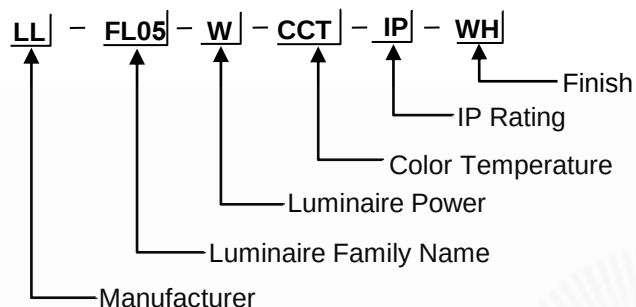

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 12	1020	85	>80
☐ 18	1530	85	>80
☐ 24	2040	85	>80
☒ 34	2980	85	>80
☐ 40	3400	85	>80

COLOR TEMPERATURE OPTION

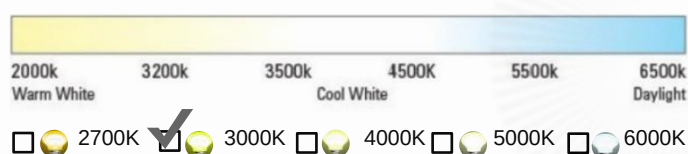

BEAM ANGLE OPTION

☒ 6° ☐ 10° ☐ 18° ☐ 30° ☐ 50° ☐ Asymmetric



FINISH OPTION



CONTROL OPTION

☐ DD	DALI DIM	
☐ D1	0-10V DIM	
☐ PD	Phase Cut DIM	
☒ D0	On/Off	

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
Advancing Light and Life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS



OSRAM

PHOTOMETRIC

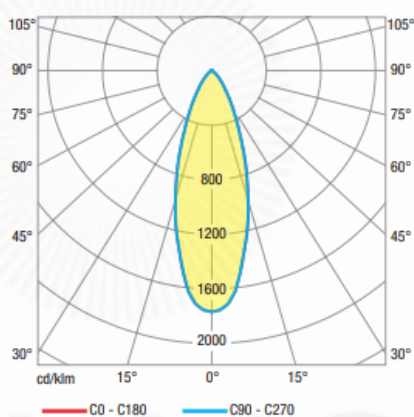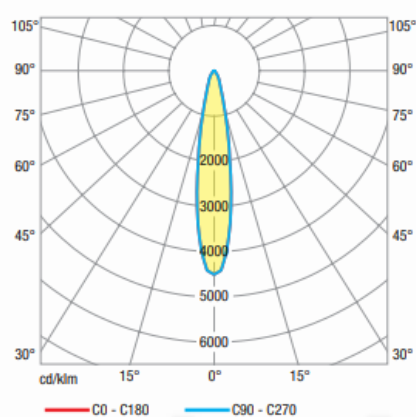

LA LUCE

LIGHT - DESIGN - MORE