





 **PDLR SLIM** is a recessed LED slim downlight with an opal polycarbonate diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **PDLR SLIM** è un downlight LED da incasso sottile con un diffusore in policarbonato opale per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT..

TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Opal Polycarbonate
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed

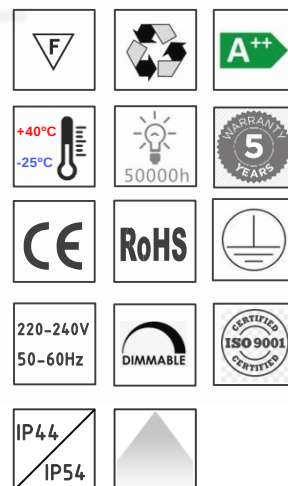




LA LUCE


LIGHT - DESIGN - MORE

ORDER CODE

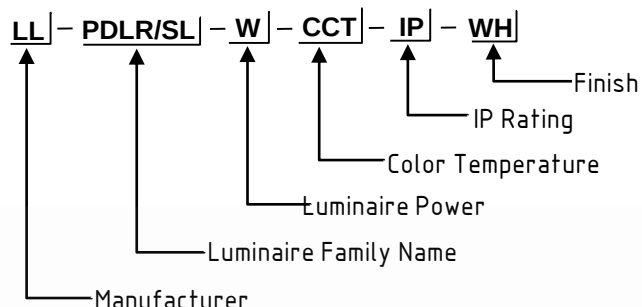

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ PDLR/SL-10W	10	1200	115	>90
☒ PDLR/SL-12W	12	1440	115	>90
☐ PDLR/SL-16W	16	1920	115	>90
☐ PDLR/SL-18W	18	2160	115	>90
☐ PDLR/SL-20W	20	2400	115	>90
☐ PDLR/SL-25W	25	3000	115	>90
☐ PDLR/SL-30W	30	3600	115	>90

COLOR TEMPERATURE

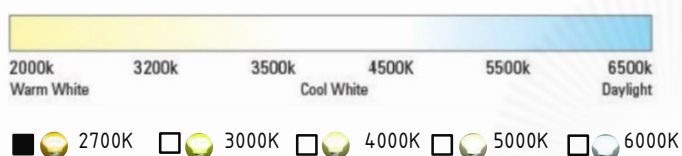

BEAM ANGLE OPTION

☒ DIFFUSED



FINISH OPTION



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

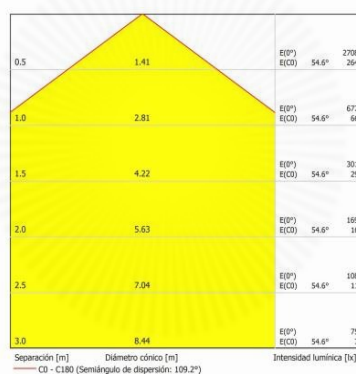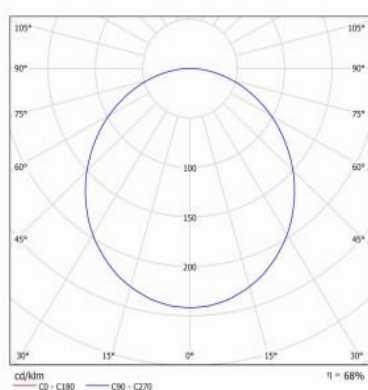

3D MODULE

