





 **PDLR** is a recessed LED slim downlight with an opal polycarbonate diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **PDLR** è un downlight LED da incasso sottile con un diffusore in policarbonato opale per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT..

TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Opal Polycarbonate
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed

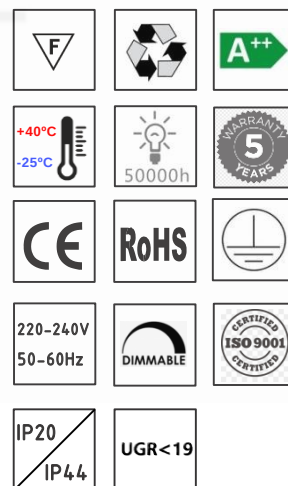




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

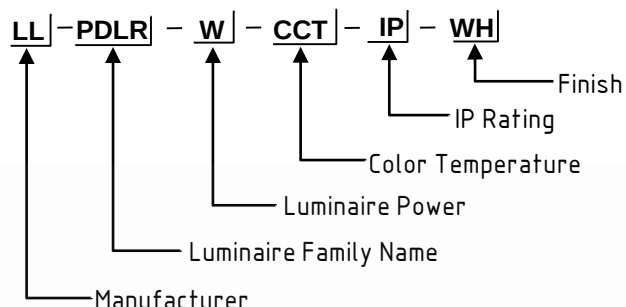

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ PDLR-10W	10	1050	105	>90
☐ PDLR-12W	12	1260	105	>90
☐ PDLR-16W	16	1680	105	>90
☐ PDLR-18W	18	1890	105	>90
☐ PDLR-20W	20	2100	105	>90
☐ PDLR-22W	22	2310	105	>90
☐ PDLR-25W	25	2625	105	>90
☐ PDLR-30W	30	3150	105	>90

COLOR TEMPERATURE

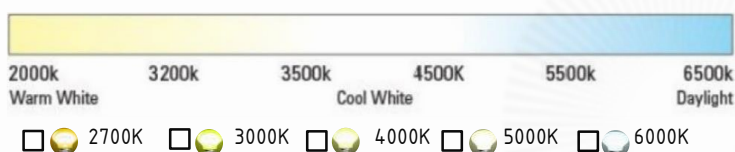

BEAM ANGLE OPTION

☐ DIFFUSED



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



FINISH OPTION



☐ WH-White

☐ BR-Black

☐ GO-Gold

☐ CH-Chrome

☐ NI-Nickel

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic


LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS

Helvar

OSRAM

PHOTOMETRIC

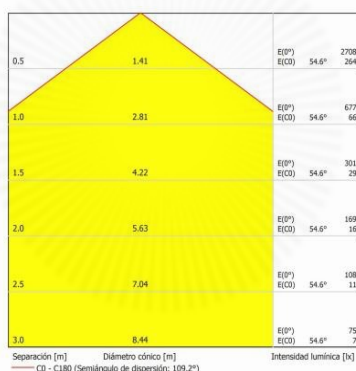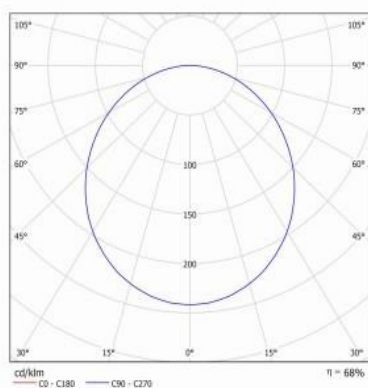

3D MODULE



LUMINAIRE DIAMETER	CUT OUT
☐ 90mmØ	75mmØ
☐ 120mmØ	100mmØ
☐ 145mmØ	130mmØ
☐ 170mmØ	150mmØ
☐ 200mmØ	180mmØ
☐ 225mmØ	205mmØ
☐ 240mmØ	220mmØ
☐ 300mmØ	280mmØ

more information in www.la-luce.it