





 **UNO GIMBAL** is Outstanding lighting fixture and provides a consistent ceiling appearance whilst gimbal slot provides the maximum adjustment in this type of small fixture. Application areas: residential, museums, retail, hotels.

 **UNO GIMBAL** è un apparecchio di illuminazione eccezionale e fornisce un aspetto coerente del soffitto mentre lo slot del giunto cardanico fornisce la massima regolazione in questo tipo di piccolo apparecchio. Ambiti di applicazione: residenziale, musei, retail, hotel.

TECHNICAL DATA

Type	Gimbal Spotlight
Installation	Recessed Downlight
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Safety Glass with Special Anti Glare Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	No

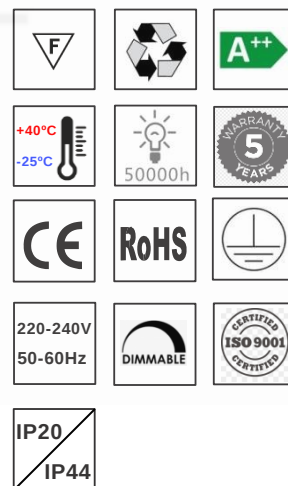




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

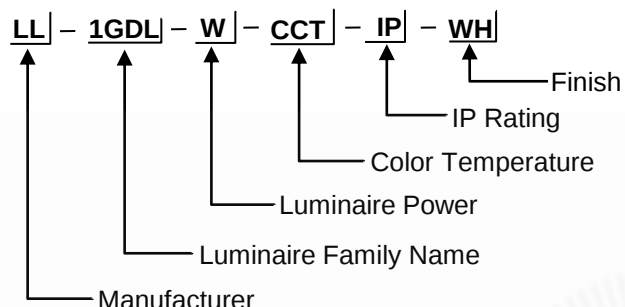

	System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐	7	840	120	>90
☐	10	1200	120	>90
☐	12	1440	120	>90
☐	15	1800	120	>90

COLOR TEMPERATURE

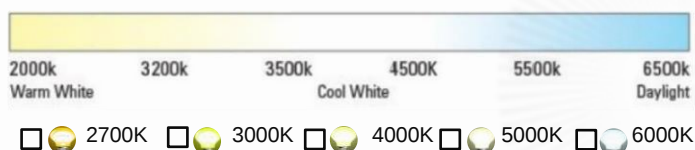

BEAM ANGLE OPTION

☐ 10° ☐ 18° ☐ 24° ☐ 30° ☐ 45° ☐ 50°



FINISH OPTION



CONTROL OPTION

- | | | |
|-----------------------------|---------------|--|
| ☐ DD | DALI DIM | |
| ☐ D1 | 0-10V DIM | |
| ☐ PD | Phase Cut DIM | |
| ☐ D0 | On/Off | |

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE






TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC



3D MODULE



LA LUCE

LIGHT - DESIGN - MORE