





 **UNO GIMBAL** is Outstanding lighting fixture and provides a consistent ceiling appearance whilst gimbal slot provides the maximum adjustment in this type of small fixture. Application areas: residential, museums, retail, hotels.

 **UNO GIMBAL** è un apparecchio di illuminazione eccezionale e fornisce un aspetto coerente del soffitto mentre lo slot del giunto cardanico fornisce la massima regolazione in questo tipo di piccolo apparecchio. Ambiti di applicazione: residenziale, musei, retail, hotel.

TECHNICAL DATA

Type	Gimbal Spotlight
Installation	Recessed Downlight
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Safety Glass with Special Anti Glare Lens
MacAdam	3 Step MacAdam
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	± 30°

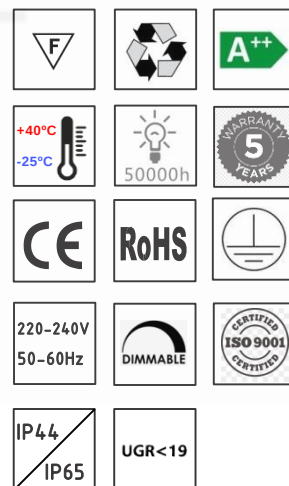




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

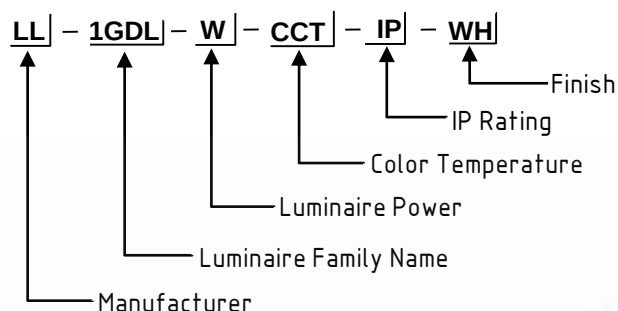

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 1GDL-7W	7	735	105	>90
☐ 1GDL-10W	10	1050	105	>90
☐ 1GDL-12W	12	1260	105	>90
☐ 1GDL-15W	15	1575	105	>90

COLOR TEMPERATURE

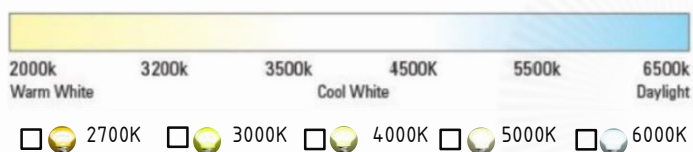


BEAM ANGLE OPTION



FINISH OPTION



CONTROL OPTION

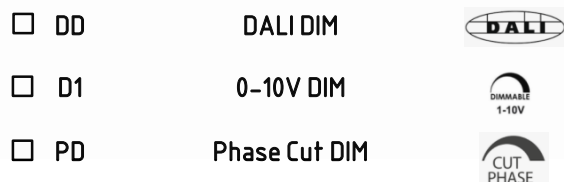

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
ADVANCING LIGHT AND LIFE™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE



TCI^{LED}
professional led applications

PHILIPS


HEP power for light

Helvar

OSRAM

LTECH

PHOTOMETRIC

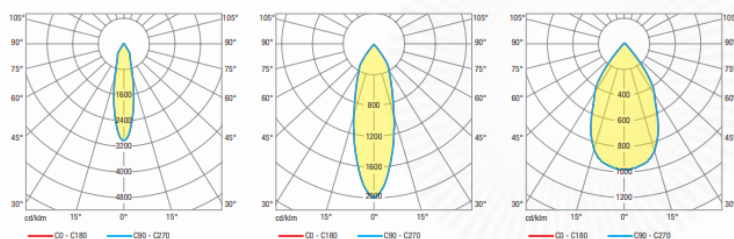

3D MODULE

