




 **LNRS** is a surface linear LED luminaire suitable for a wide range of wall washing, accent, surface grazing, and indirect lighting applications in architectural, hospitality, and retail environments with different Lengths, wattage, lumen, beam angle, CRI, and CCT option.

 **LNRS** è un apparecchio di illuminazione a LED lineare di superficie adatto per un'ampia gamma di applicazioni di illuminazione a parete, d'accento, radente e indiretta in ambienti architettonici, alberghieri e di vendita al dettaglio con diverse lunghezze, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Linear Uplight
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Tempered safety glass with antiglare lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote/Built-In
Adjustable	Yes

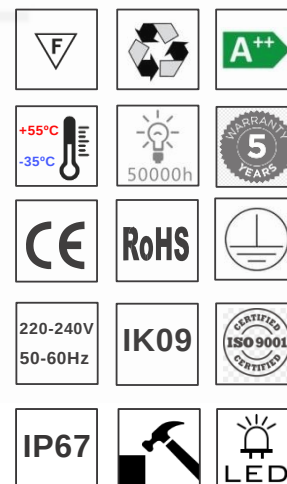





LA LUCE

LIGHT - DESIGN - MORE


ORDERING

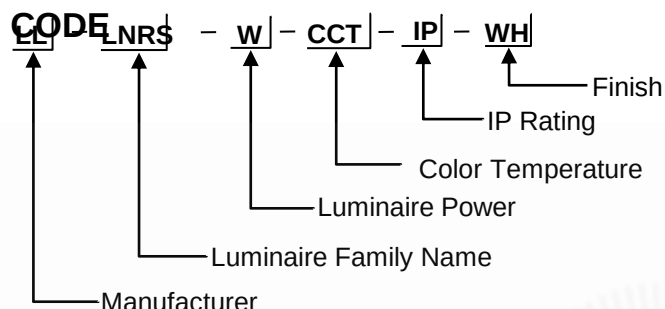


COLOR TEMPERATURE OPTION

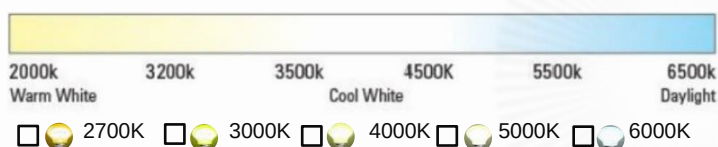


BEAM ANGLE OPTION



FINISH OPTION

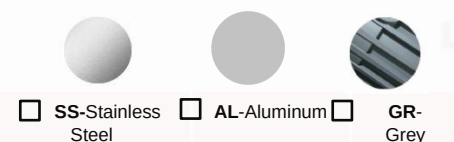

CONTROL OPTION

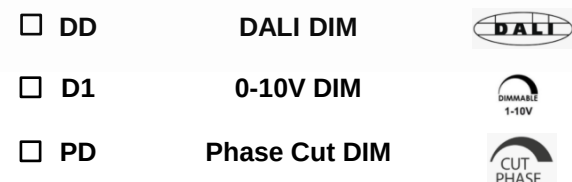

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ LNRS-8W	8	840	105	>90
☐ LNRS-10W	10	1050	105	>90
☐ LNRS-12W	12	1260	105	>90
☐ LNRS-18W	18	1890	105	>90
☐ LNRS-20W	20	2100	105	>90
☐ LNRS-22W	22	2310	105	>90
☐ LNRS-30W	30	3150	105	>90
☐ LNRS-36W	36	3780	105	>90



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM


PHOTOMETRIC

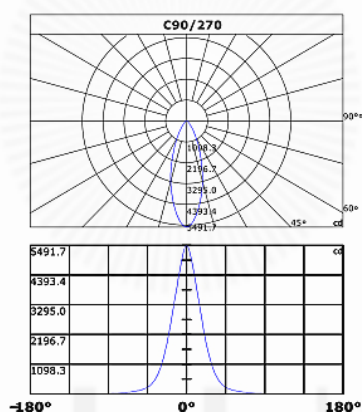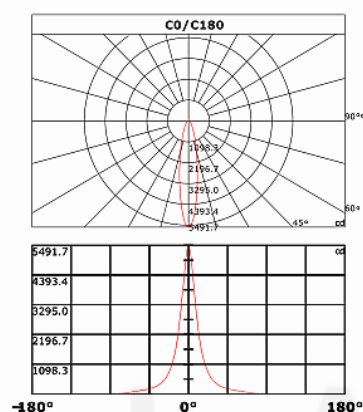


3D MODULE



Built-in Driver



Anti-glare Baffle



Dimension