




 **LINEAR Grazer** Diffused Recessed linear recessed luminaire has a minimalist appearance emphasizes architectural details in a discreet way, offers a diffused and homogeneous light emission without shadows with different length, wattage, lumen, beam angle, CRI, and CCT option.

 **LINEAR Grazer** Diffused Incasso lineare da incasso ha un aspetto minimalista che enfatizza i dettagli architettonici in modo discreto, offre un'emissione di luce diffusa e omogenea senza ombre con diverse opzioni di lunghezza, potenza, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Linear Inground
Installation	Recessed
Housing	6063 Anodized aluminum
Processing	Powder Coated
Diffuser	PMMA (10mm thick)
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Gasket	Molding shape silicon seal
Cable Gland	Nickel coated copper/ABS
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	No

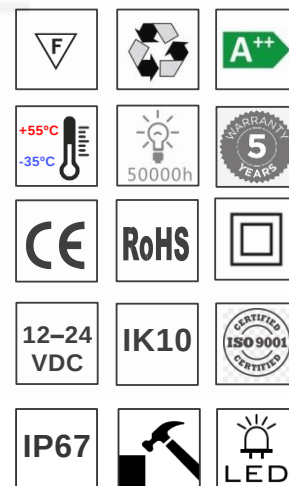




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

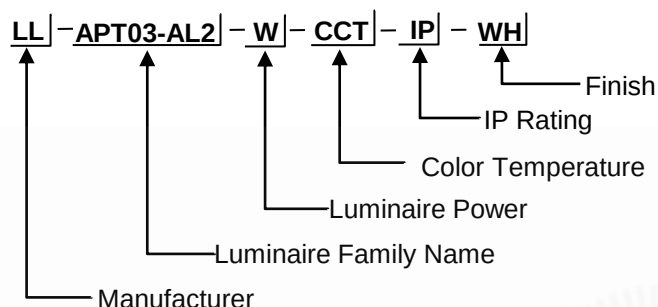

System Wattage (W/m)	Lumen Output (lm/m)	Luminaire Efficacy (lm/W)	CRI
☐ 5	550	110	>90
☐ 7	770	110	>90
☐ 10	1100	110	>90
☐ 12	1320	110	>90
☐ 14	1540	110	>90
☐ 18	1980	110	>90
☐ 20	2200	110	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ DIFFUSED



FINISH OPTION



☐ SS-Stainless Steel ☐ PPG ☐ GR-Grey

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




PHILIPS


Helvar

OSRAM


PHOTOMETRIC




3D MODULE

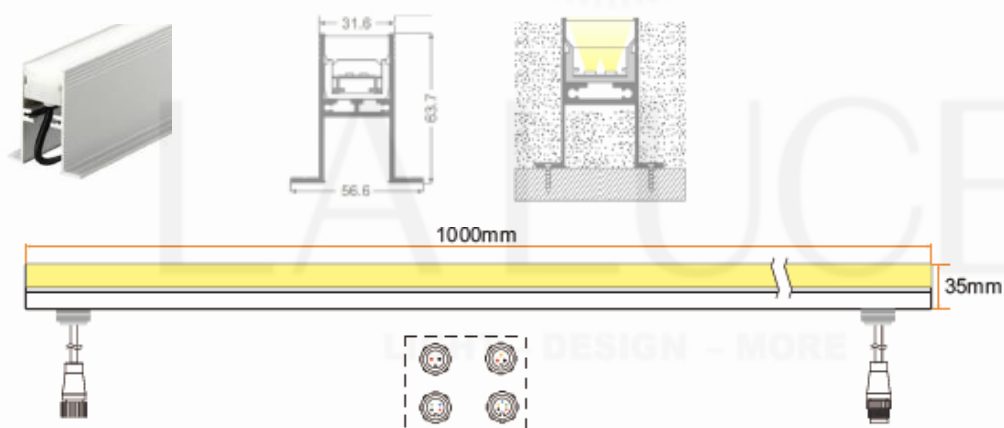

REGULAR CONNECTION

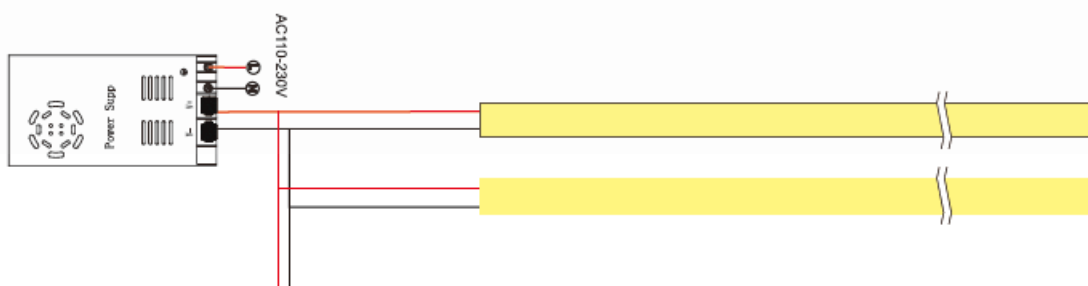

CONNECTION WITH DIMMER

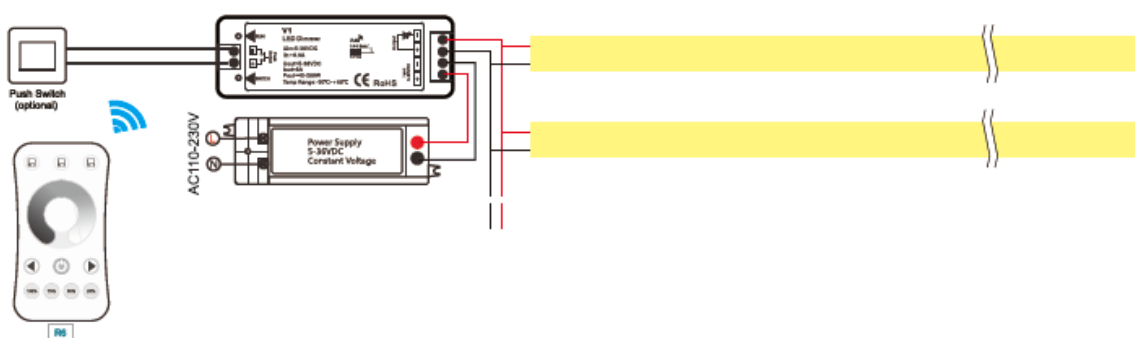

more information in www.la-luce.it