




 **BL1000G** is an elegant lighting bollard that is suitable for both modern and classic architecture. Ideal for creating visual guidance with exceptional visual comfort with different heights, wattage, lumen, CRI, and CCT options.

 **BL1000G** è un elegante paletto luminoso adatto sia all'architettura moderna che a quella classica. Ideale per creare una guida visiva con un comfort visivo eccezionale con diverse opzioni di altezza, potenza, lumen, CRI e CCT.

TECHNICAL DATA

Type	Decorative Bollard Light
Installation	Ground Surface
Housing	Die-cast aluminium
Processing	Powder Coated
Diffuser	Tempered safety glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

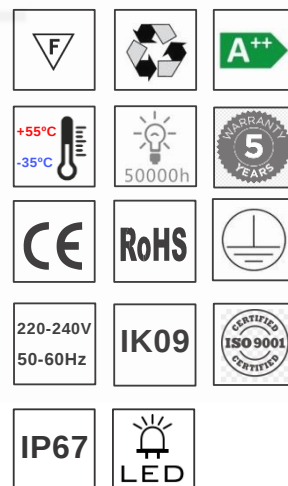




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

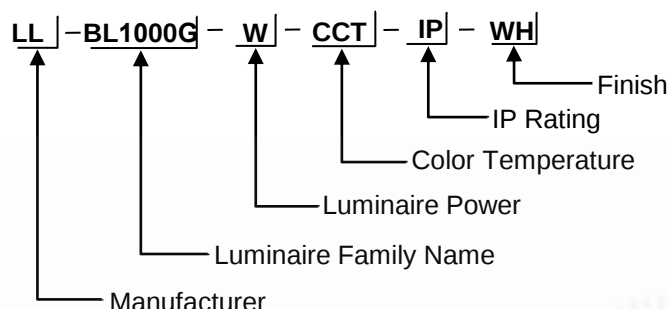

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ BL 1000G-8W	8	800	100	>90
☐ BL 1000G-10W	10	1000	100	>90
☐ BL 1000G-15W	15	1500	100	>90
☐ BL 1000G-18W	18	1800	100	>90
☐ BL 1000G-20W	20	2000	100	>90
☐ BL 1000G-25W	25	2500	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

FINISH OPTION



☐ NI-Nickel ☐ BL - Black ☐ GR-Grey

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM

SEOUL

NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCIE LED

bridgelux

LUMILEDS

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLE RISE

DONE

LA LUCE


TCIE LED

PHILIPS

Helvar

OSRAM

more information in www.la-luce.it



Technical drawing of a column. The total height is indicated as 1000. A section of the column is shown with a height of 600. This section includes a base and a fluted shaft. The width of the base is indicated as 165.

