


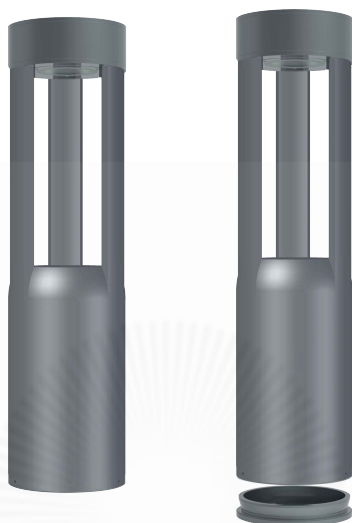



 **BL600G** is an elegant lighting bollard that is suitable for both modern and classic architecture. Ideal for creating visual guidance with exceptional visual comfort with different heights, wattage, lumen, CRI, and CCT options.

 **BL600G** è un elegante paletto luminoso adatto sia all'architettura moderna che a quella classica. Ideale per creare una guida visiva con un comfort visivo eccezionale con diverse opzioni di altezza, potenza, lumen, CRI e CCT.

TECHNICAL DATA

Type	Decorative Bollard Light
Installation	Ground Surface
Housing	Die-cast aluminium
Processing	Powder Coated
Diffuser	Tempered safety glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

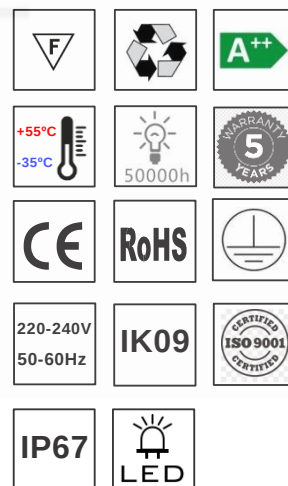




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

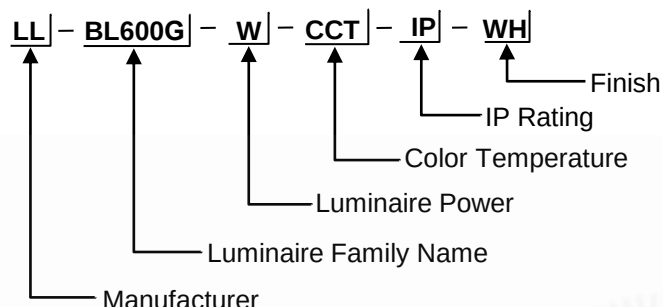

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ BL600G-8W	8	800	100	>90
☐ BL600G-10W	10	1000	100	>90
☐ BL600G-15W	15	1500	100	>90
☐ BL600G-18W	18	1800	100	>90
☐ BL600G-20W	20	2000	100	>90
☐ BL600G-25W	25	2500	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

FINISH OPTION



☐ NI-Nickel ☐ BL - Black ☐ GR-Grey

CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM

LED CHIPS

OSRAM

CREE

TRIDONIC

TCIE
LED
professional led applications

SEOUL

Panasonic

bridgelux
Bringing Light and Life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

LED DRIVERS

MW
MEAN WELL

TRIDONIC

EAGLE RISE

DONE

LA LUCE
LIGHT - DESIGN - MORE

TCIE
LED
professional led applications



PHILIPS

Helvar

OSRAM

more information in www.la-luce.it

PHOTOMETRIC

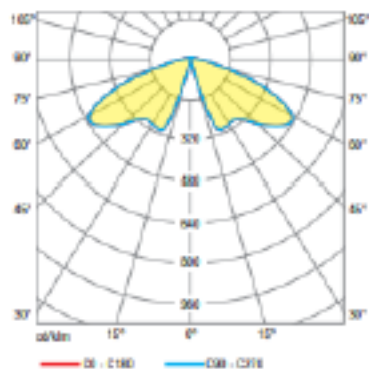

3D MODULE

