





 **BLK28** is a bulkhead surface wall mounted luminaire, an attractive and functional commercial grade exterior wall light with a die-cast aluminum body and polycarbonate diffuser.

 **BLK28** è un apparecchio per montaggio a parete a parete, un'applicare per esterni di qualità commerciale attraente e funzionale con un corpo in alluminio pressofuso e un diffusore in policarbonato.

TECHNICAL DATA

Type	Bulkhead
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Opal Polycarbonate
MacAdam	3 Step MacAdam
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

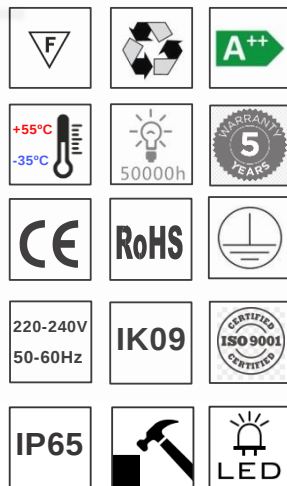





LA LUCE

LIGHT - DESIGN - MORE

ORDERING CODE

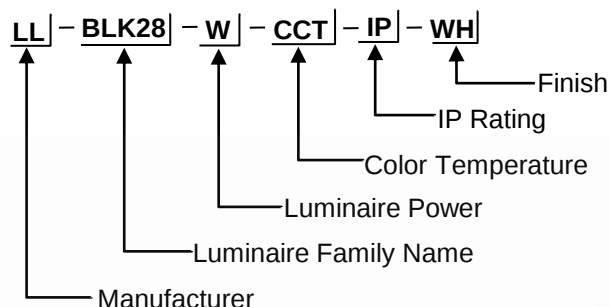

COLOR TEMPERATURE OPTION

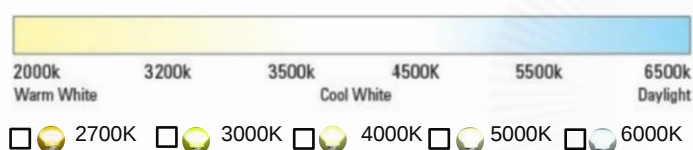

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ BLK28-18W	18	1890	105	>80
☐ BLK28-20W	20	2100	105	>80
☐ BLK28-25W	25	2625	105	>80
☐ BLK28-30W	30	3150	105	>80
☐ BLK28-35W	35	3675	105	>80
☐ BLK28-40W	40	4200	105	>80
☐ BLK28-45W	45	4725	105	>80
☐ BLK28-50W	50	5250	105	>80

BEAM ANGLE

☒ WIDE



FINISH OPTION



☐ WH-White ☐ GR-Grey ☐ BR-Black

CONTROL OPTION

☐ DD	DALI DIM	
☐ D1	0-10V DIM	
☐ PD	Phase Cut DIM	

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

more information in www.la-luce.it

LED DRIVERS



TRIDONIC

EAGLE RISE

DONE



TCI LED
professional led applications

PHILIPS


HEP power for light*

Helvar

OSRAM

LTECH

PHOTOMETRIC

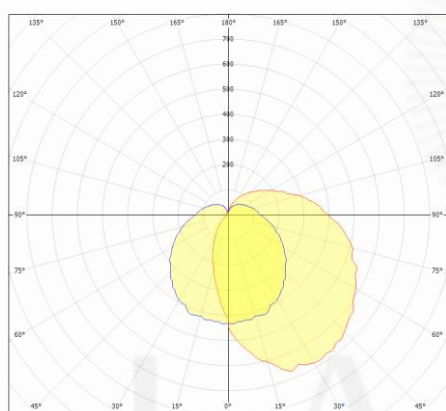

3D MODULE

