





 **BLW** is Square shaped Wall/Ceiling mounted clearly defined symmetric of light. Adapted to illuminate ground surfaces with a wide beam of light with different sizes, wattage, lumen, CRI, and CCT options.

 **BLW** è una parete / soffitto di forma quadrata, simmetrica di luce chiaramente definita. Adattato per illuminare le superfici del terreno con un ampio fascio di luce con diverse opzioni di dimensioni, wattaggio, lumen, CRI e CCT.

TECHNICAL DATA

Type	Wall Light
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Polycarbonate
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

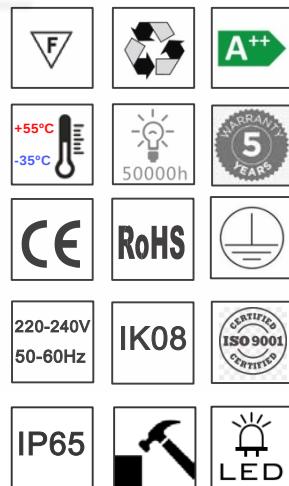




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

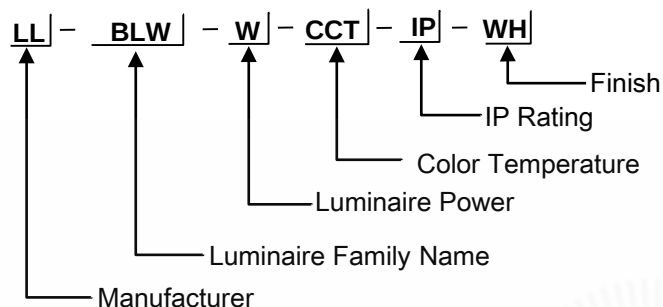

	System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐	5	500	100	>90
☐	8	800	100	>90
☐	10	1000	100	>90
☐	12	1200	100	>90
☐	15	1500	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ DIFFUSED



FINISH OPTION

☐ WH-White ☐ BR-Black ☐ GO-Gold ☐ CH-Chrome ☐ NI-Nickel

CONTROL OPTION

☐ DD DALI DIM 
☐ D1 0-10V DIM 
☐ PD Phase Cut DIM 
☐ D0 On/Off

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic


bridgelux
shaping light and life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS


Helvar

OSRAM

PHOTOMETRIC

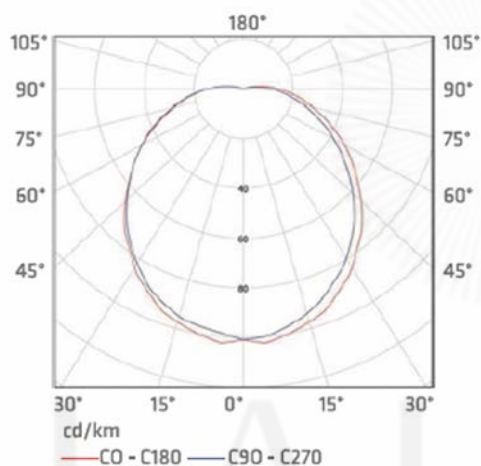

3D MODULE

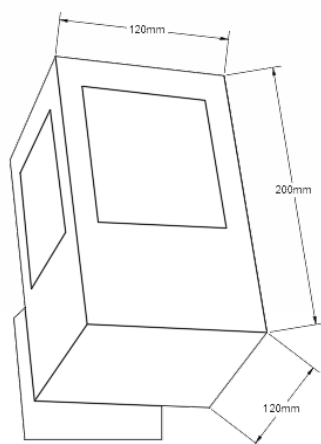

more information in www.la-luce.it