





 **DUO GIMBAL** is Outstanding lighting fixture and provides a consistent ceiling appearance whilst gimbal slot provides the maximum adjustment in this type of small fixture. Application areas: residential, museums, retail, hotels.

 **DUO GIMBAL** è un apparecchio di illuminazione eccezionale e fornisce un aspetto coerente del soffitto mentre lo slot del giunto cardanico fornisce la massima regolazione in questo tipo di piccolo apparecchio. Ambiti di applicazione: residenziale, musei, retail, hotel.

TECHNICAL DATA

Type	Gimbal Downlight
Installation	Recessed Downlight
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Safety Glass with Special Anti Glare Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	No

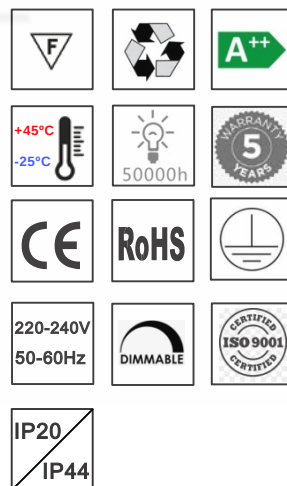




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

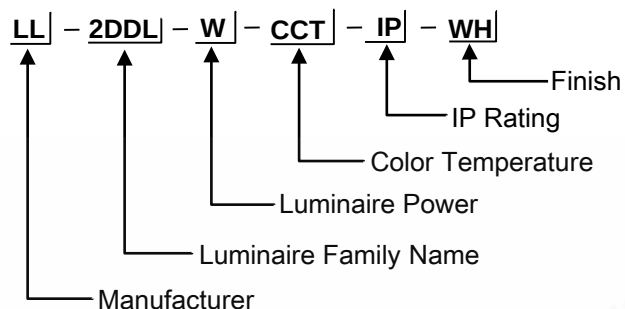

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 2DDL-2*8	8	760	95	>90
☐ 2DDL-2*10	10	950	95	>90
☐ 2DDL-2*12	12	1140	95	>90
☐ 2DDL-2*15	15	1420	95	>90
☐ 2DDL-2*18	18	1710	95	>90

COLOR TEMPERATURE



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 90° ☐ 100° ☐ 110° ☐ 120°



FINISH OPTION



☐ WH-White ☐ BR-Black ☐ GO-Gold ☐ CH-Chrome ☐ NI-Nickel

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS


TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





professional led applications



PHILIPS

OSRAM

PHOTOMETRIC

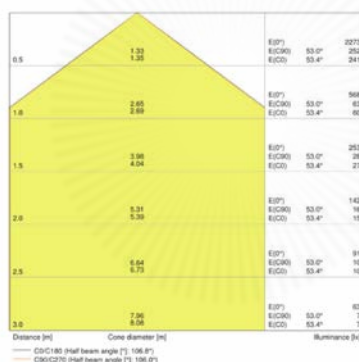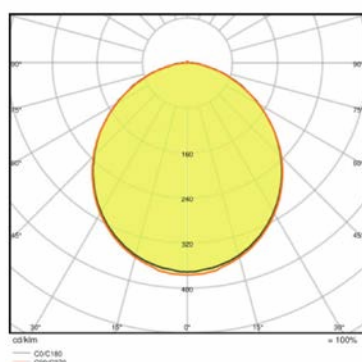

DIMENSION:

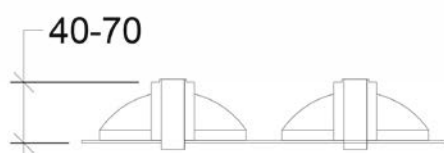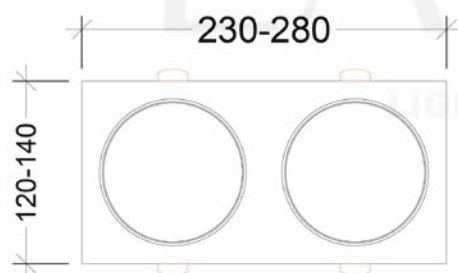

Wattage	Hole size (mm)	Face diameter size (mm)
6	75*150	92*175
10	90*200	120*230
14	90*200	120*230
18	120*260	140*280
24	120*260	140*280

more information in www.la-luce.it