





 **FL150** is perfect for highlighting features on buildings or in flagpole with LED light source for the waterproofed, powerful, versatile spotlight, mounted on ground spike. Its compact size makes this light fitting ideally suited to any number of applications.

 **FL150** è perfetto per evidenziare le caratteristiche degli edifici o nell'asta della bandiera con sorgente luminosa a LED per il faretto impermeabile, potente e versatile, montato su picchetto da terra. Le sue dimensioni compatte rendono questo apparecchio di illuminazione ideale per qualsiasi numero di applicazioni.

TECHNICAL DATA

Type	Flood Light
Installation	Surface
Housing	Die-cast aluminium
Processing	Powder Coated
Diffuser	Safety Glass
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	Yes

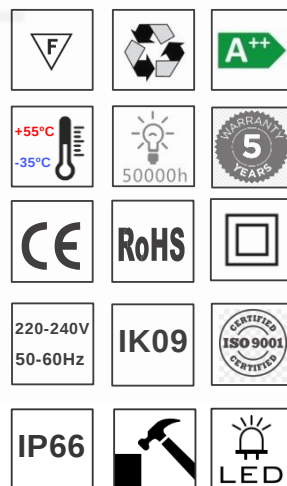




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

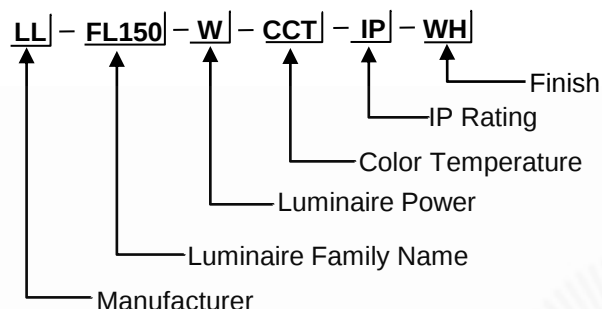

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ FL150-15W	15	1500	100	>90
☐ FL150-18W	18	1800	100	>90
☐ FL150-24W	24	2400	100	>90
☐ FL150-28W	28	2800	100	>90
☐ FL150-32W	32	3200	100	>90
☐ FL150-36W	36	3600	100	>90
☐ FL150-40W	40	4000	100	>90

COLOR TEMPERATURE OPTION

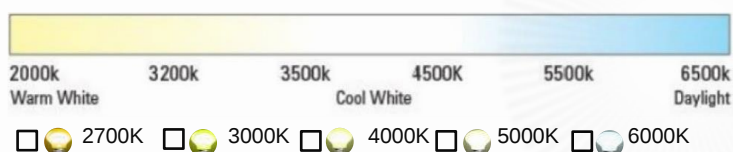

BEAM ANGLE OPTION



FINISH OPTION



CONTROL OPTION

☐ DD	DALI DIM	
☐ D1	0-10V DIM	
☐ PD	Phase Cut DIM	

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC



3D MODULE

