



LA LUCE

LIGHT - DESIGN - MORE

UPLIGHT LIGHT





 **INGRR** is a recessed LED in-ground Compact drive-over and walk over in-ground recessed LED luminaire designed for the signalization of streets, cycle lanes, and pedestrian ways and facade lighting. with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **INGRR** è un apparecchio da incasso a LED da incasso a pavimento compatto carrabile e calpestabile a LED progettato per la segnalazione di strade, piste ciclabili, percorsi pedonali e illuminazione di facciate. con diversi diametri, potenza, lumen, angolo del fascio, opzione CRI e CCT.

TECHNICAL DATA

Type	In-ground Up-light
Installation	Recessed
Housing	Die-cast Aluminum with Stainless Steel 316
Processing	Powder Coated
Diffuser	Safety Glass with Anti - Glare Special Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	+/- 25°
Gland	IP68 PVC

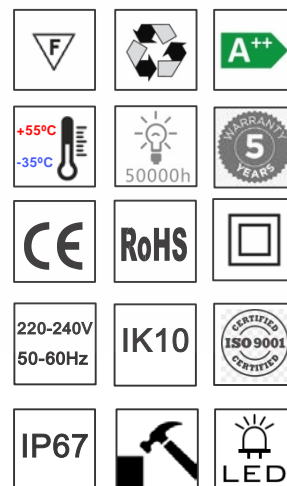




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

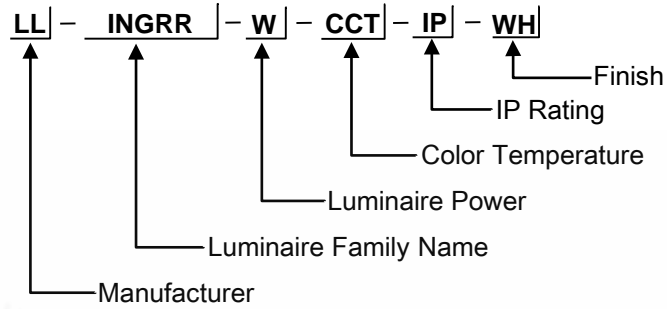

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
<input type="checkbox"/> INGRR-6W	6	1014	169	>90
<input type="checkbox"/> INGRR-8W	8	1352	169	>90
<input type="checkbox"/> INGRR-10W	10	1690	169	>90
<input type="checkbox"/> INGRR-12W	12	2028	169	>90
<input type="checkbox"/> INGRR-14W	14	2366	169	>90
<input type="checkbox"/> INGRR-16W	16	2704	169	>90

COLOR TEMPERATURE OPTION



- 2700K 3000K 4000K 5000K 6000K

BEAM ANGLE OPTION

- 10° 15° 18° 26° 46° 60° ASY



FINISH OPTION

- SS**-Stainless Steel **PPG** **GR**-Grey


CONTROL OPTION

- DD** **DALI DIM**
- D1** **0-10V DIM**
- PD** **Phase Cut DIM**

LED CHIPS



more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS



OSRAM

PHOTOMETRIC

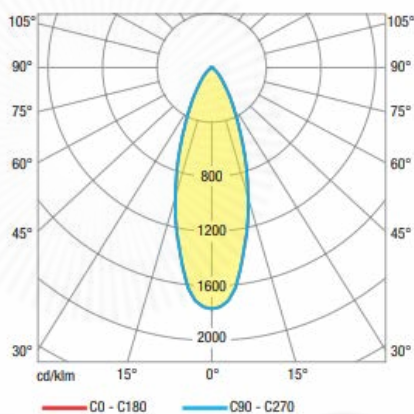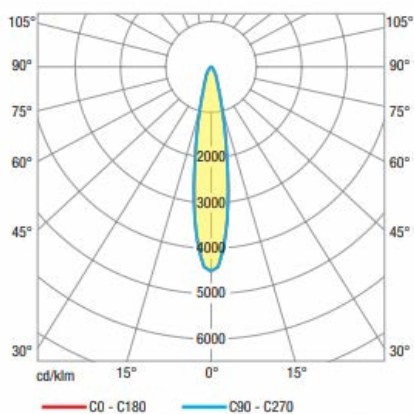

3D MODULE

