





 **INGRO** is a recessed LED in-ground Compact drive-over and walk over in-ground recessed LED luminaire designed for the signalization of streets, cycle lanes, and pedestrian ways and facade lighting. with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **INGRO** è un apparecchio da incasso a LED da incasso a pavimento compatto carrabile e calpestabile a LED progettato per la segnalazione di strade, piste ciclabili, percorsi pedonali e illuminazione di facciate. con diversi diametri, potenza, lumen, angolo del fascio, opzione CRI e CCT.

TECHNICAL DATA

Type	In-ground Up-light
Installation	Recessed
Housing	Die-cast Aluminum with Stainless Steel 316
Processing	Powder Coated
Diffuser	Safety Glass with Anti - Glare Special Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	+/- 25°
Gland	IP68 PVC

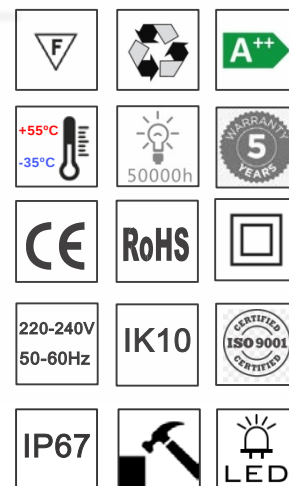





LA LUCE

LIGHT - DESIGN - MORE

ORDERING CODE

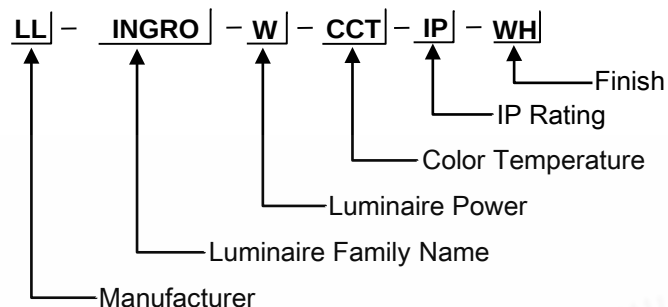

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

☐ AMBER ☐ RGB ☐ RGBW ☐ RGBA

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ INGRO-18W	18	1620	90	>90
☐ INGRO-20W	20	1800	90	>90
☐ INGRO-25W	25	2250	90	>90
☐ INGRO-30W	30	2700	90	>90
☐ INGRO-36W	36	3240	90	>90
☐ INGRO-38W	38	3420	90	>90
☐ INGRO-42W	42	3780	90	>90
☐ INGRO-46W	46	4140	90	>90
☐ INGRO-50W	50	4500	90	>90

BEAM ANGLE OPTION

☐ 10° ☐ 15° ☐ 18° ☐ 26° ☐ 46° ☐ 60° ☐ ASY

FINISH OPTION

☐ **SS**-Stainless Steel ☐ **PPG** ☐ **GR**-Grey

CONTROL OPTION

☐ **DD** **DALI DIM**

☐ **D1** **0-10V DIM**

☐ **PD** **Phase Cut DIM**

LED CHIPS

OSRAM

CREE

TRIDONIC

TCI

SEOUL

Panasonic


bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS

Helvar

OSRAM

PHOTOMETRIC

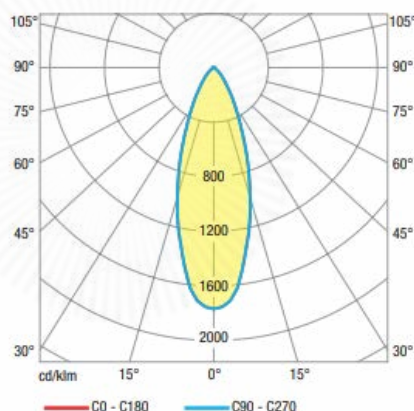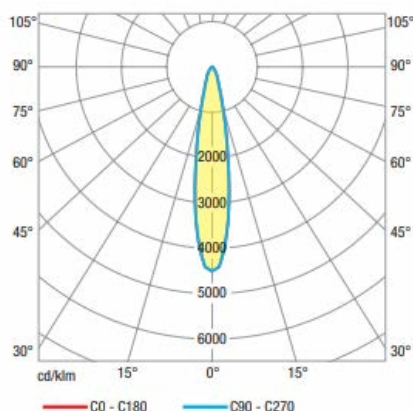

3D MODULE

