





 **LINTR** Diffused Recessed linear recessed luminaire has a minimalist appearance emphasizes architectural details in a discreet way, offers a diffused and homogeneous light emission without shadows with different length, wattage, lumen, beam angle, CRI, and CCT option.

 **LINTR** Diffused Incasso lineare da incasso ha un aspetto minimalista che enfatizza i dettagli architettonici in modo discreto, offre un'emissione di luce diffusa e omogenea senza ombre con diverse opzioni di lunghezza, potenza, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Linear Inground
Installation	Recessed
Housing	Extruded Aluminium with Stainless Steel frame
Processing	Powder Coated
Diffuser	Tempered Safety Glass with Anti Glare Lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	II
Gasket	Molding Shape Silicon Seal
Cable Gland	Nickel Coated Copper/ABS
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	Yes

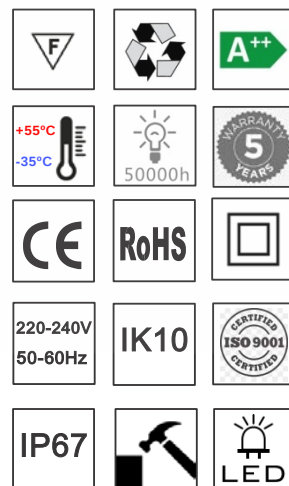





LA LUCE

LIGHT - DESIGN - MORE

MODEL CODE

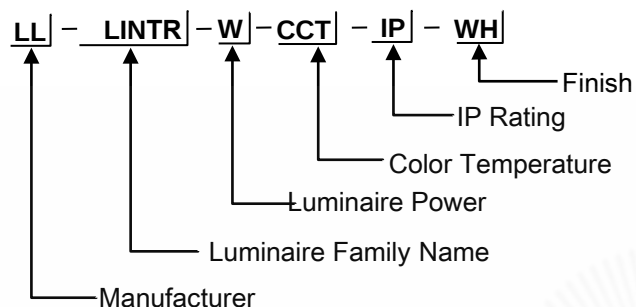

COLOR TEMPERATURE OPTION

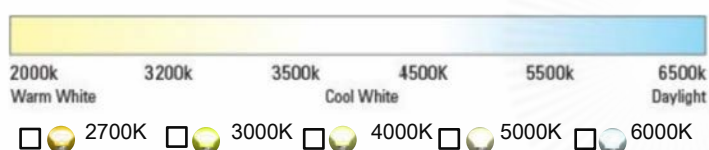

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric



FINISH OPTION



☐ SS-Stainless Steel ☐ PPG ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM
☐ D1 0-10V DIM
☐ PD Phase Cut DIM
☐ D0 On/Off



LED CHIPS

OSRAM

CREE

TRIDONIC

TCI LED

SEOUL

Panasonic

bridgelux


NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 8	888	111	>80
☐ 11	1221	111	>80
☐ 15	1665	111	>80
☐ 18	1998	111	>80
☐ 20	2220	111	>80
☐ 25	2775	111	>80
☐ 30	3330	111	>80
☐ 36	3996	111	>80
☐ 40	4440	111	>80
☐ 48	5328	111	>80



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

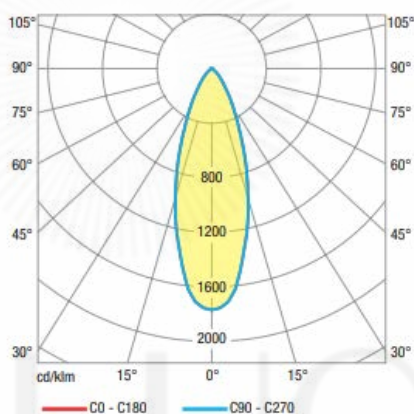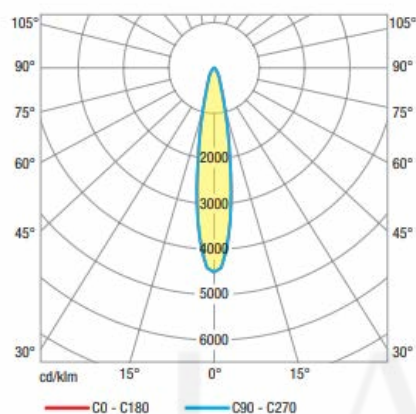

3D MODULE

LIGHT - DESIGN - MORE

