





 **LNRM** is a surface linear LED luminaire suitable for a wide range of wall washing, accent, surface grazing, and indirect lighting applications in architectural, hospitality, and retail environments with different Lengths, wattage, lumen, beam angle, CRI, and CCT option.

 **LNRM** è un apparecchio di illuminazione a LED lineare di superficie adatto per un'ampia gamma di applicazioni di illuminazione a parete, d'accento, radente e indiretta in ambienti architettonici, alberghieri e di vendita al dettaglio con diverse lunghezze, potenza, lumen, angolo del fascio, CRI e opzione CCT.

TECHNICAL DATA

Type	Linear Uplight
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Tempered safety glass with antiglare lens
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote/Built-In
Adjustable	Yes

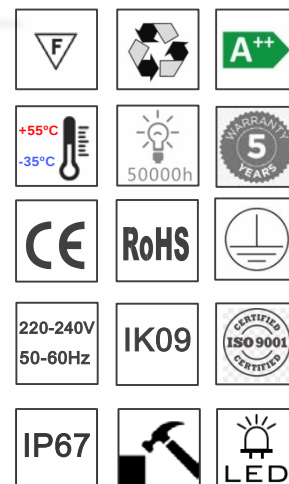




LA LUCE


LIGHT - DESIGN - MORE

MODEL CODE

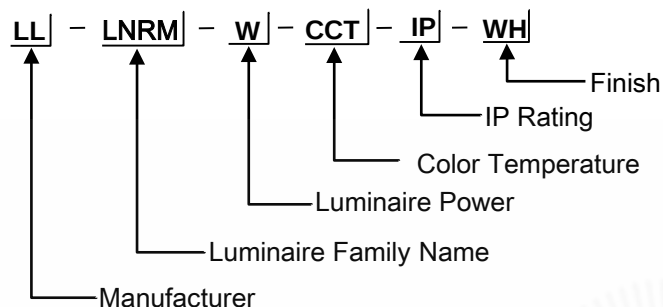

System Wattage (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ 72/M	8640	120	>90
☐ 82/M	9840	120	>90
☐ 96/M	11520	120	>90
☐ 110/M	13200	120	>90
☐ 120/M	14400	120	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

☐ AMBER ☐ RGB ☐ RGBW ☐ RGBA

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric ☐ 10°x60° ☐ 15°x30° ☐ 30°x60° ☐ 60°x30°



FINISH OPTION



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ D0

On/Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS


Helvar

OSRAM

PHOTOMETRIC

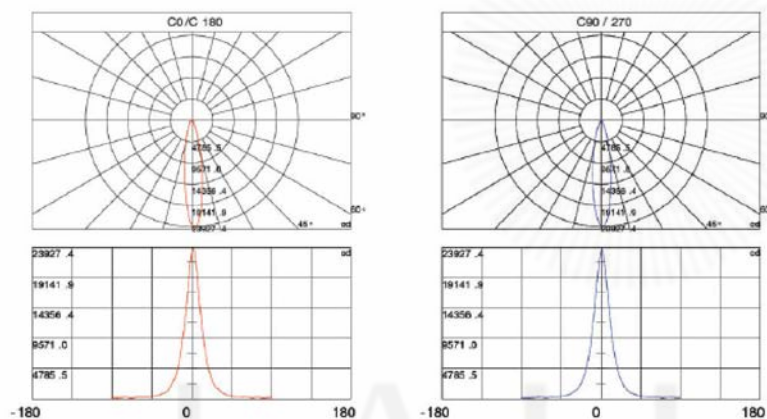

3D MODULE

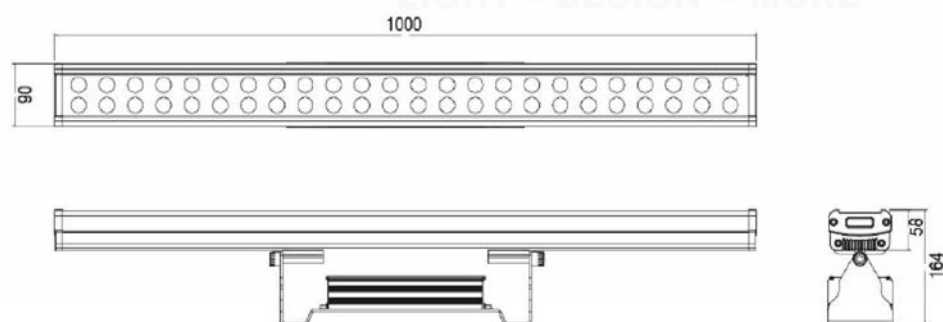

more information in www.la-luce.it