





 **SLM100** Is wall light has a slim and sleek design It produces perfect lighting conditions without annoying reflections and suitable use in wall hallway, lobby area, waiting area and picture frame light.

 **SLM100** è una lampada da parete dal design sottile ed elegante. Produce condizioni di illuminazione perfette senza fastidiosi riflessi e può essere utilizzata in corridoi a parete, hall, aree di attesa e luci per cornici.

TECHNICAL DATA

Type	Wall Light
Installation	Surface
Housing	Metal/Copper
Processing	Powder Coated
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	No

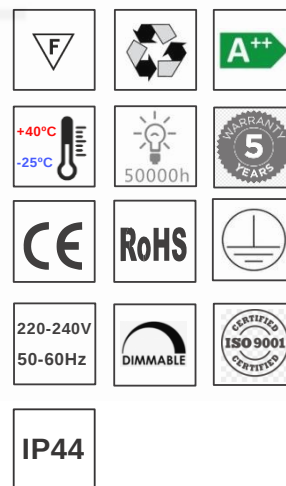




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

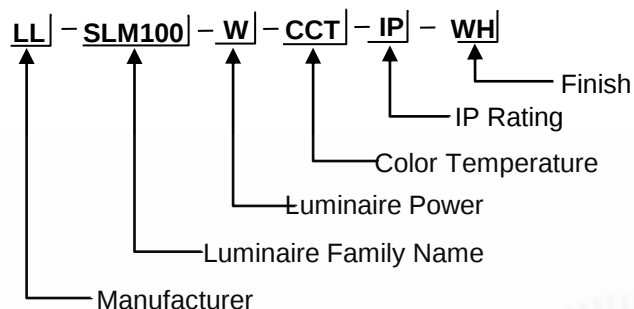

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ SLM100-4W	4	360	90	>90
☐ SLM100-6W	6	540	90	>90
☐ SLM100-8W	8	720	90	>90
☐ SLM100-10W	10	900	90	>90
☐ SLM100-12W	12	1080	90	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☐ WIDE



FINISH OPTION



☐ WH-White

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC


CITIZEN ELECTRONICS CO., LTD.

TCLED professional led applications

bridgelux. Advancing Light and Life™

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

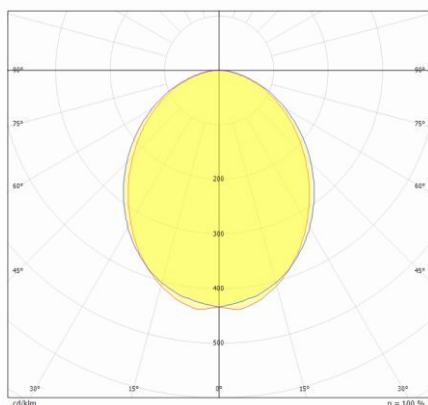

LA LUCE

LIGHT - DESIGN - MORE

3D MODULE

