





 **PNL120** is a recessed LED slim Panel with an opal PMMA diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different wattage, lumen, CRI and CCT option.

 **PNL120** è un pannello sottile a LED da incasso con un diffusore in PMMA opale per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Panel Light
Installation	Recessed/Surface/Suspended
Housing	Aluminium
Processing	Powder Coated
Diffuser	Opal PMMA
MacAdam	3 Step MacAdam
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote

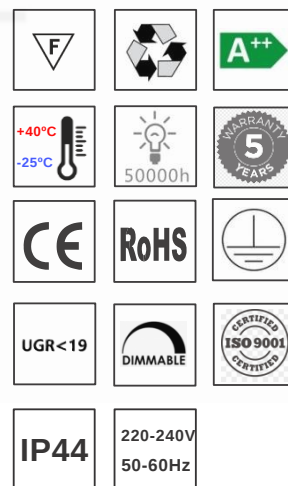




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

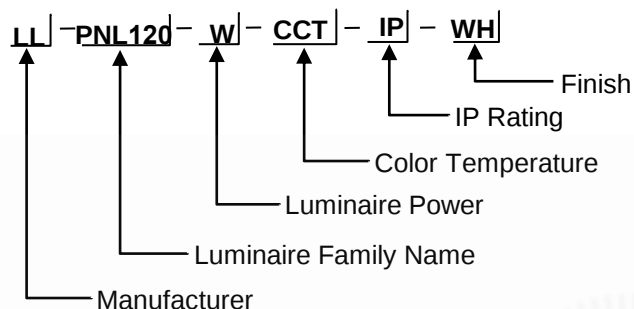

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ PNL120-30W	32	3360	105	>80
☐ PNL120-35W	36	3780	105	>80
☐ PNL120-40W	40	4200	105	>80
☐ PNL120-60W	60	6300	105	>80

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☐ WIDE



FINISH



☐ WH-White

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE



TCI^{LED}
professional led applications

PHILIPS



HEP
power for light

Helvar

OSRAM

LTECH

PHOTOMETRIC

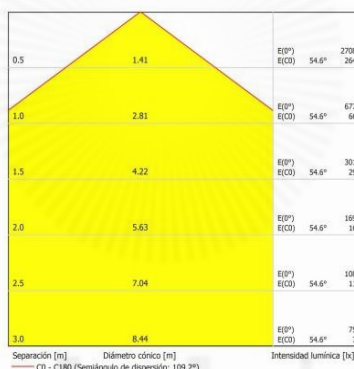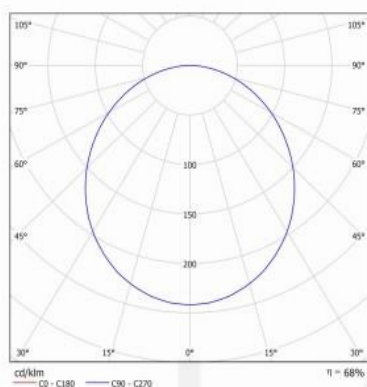

3D MODULE

