




 **PROJECTOR** is a high output LED floodlight with provides a high-intensity wash of light with customizable beam angles for floodlighting, spotlighting, wall washing and grazing and ideal for lighting facades, large structures, bridges, sports areas, retail spaces and perimeter areas.

 **PROJECTOR** è un proiettore a LED ad alto rendimento con fornisce un wash di luce ad alta intensità con angoli del fascio personalizzabili per illuminazione a fascio, spotlight, wall washing e radente e ideale per l'illuminazione di facciate, grandi strutture, ponti, aree sportive, spazi commerciali e aree perimetrali.

TECHNICAL DATA

Type	Floodlight
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Tempered Safety Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	Yes

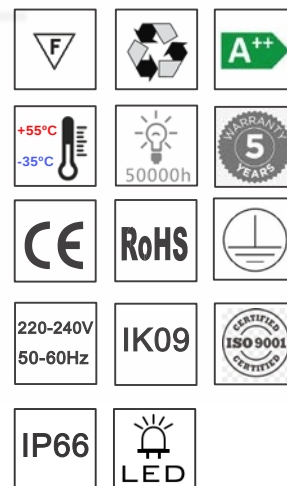




LA LUCE

LIGHT - DESIGN - MORE

ORDERING CODE

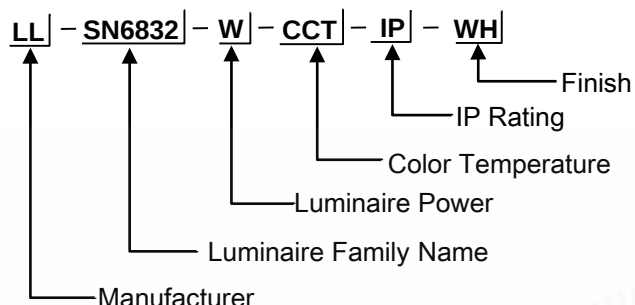

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ SN6832-60W	60	6900	115	>90
☐ SN6832-65W	65	7475	115	>90
☐ SN6832-72W	72	8250	115	>90
☐ SN6832-75W	75	8625	115	>90

COLOR TEMPERATURE OPTION



BEAM ANGLE OPTION

☐ 5° ☐ 8° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric

FINISH OPTION



CONTROL OPTION

- | | | |
|-----------------------------|---------------|--|
| ☐ DD | DALI DIM | |
| ☐ D1 | 0-10V DIM | |
| ☐ PD | Phase Cut DIM | |

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
shaping light and life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS




OSRAM

PHOTOMETRIC

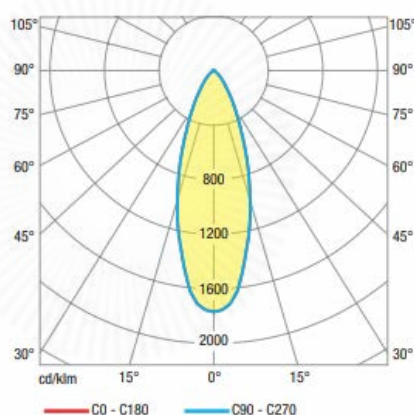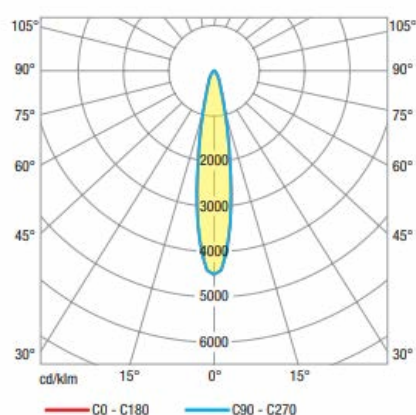

3D MODULE

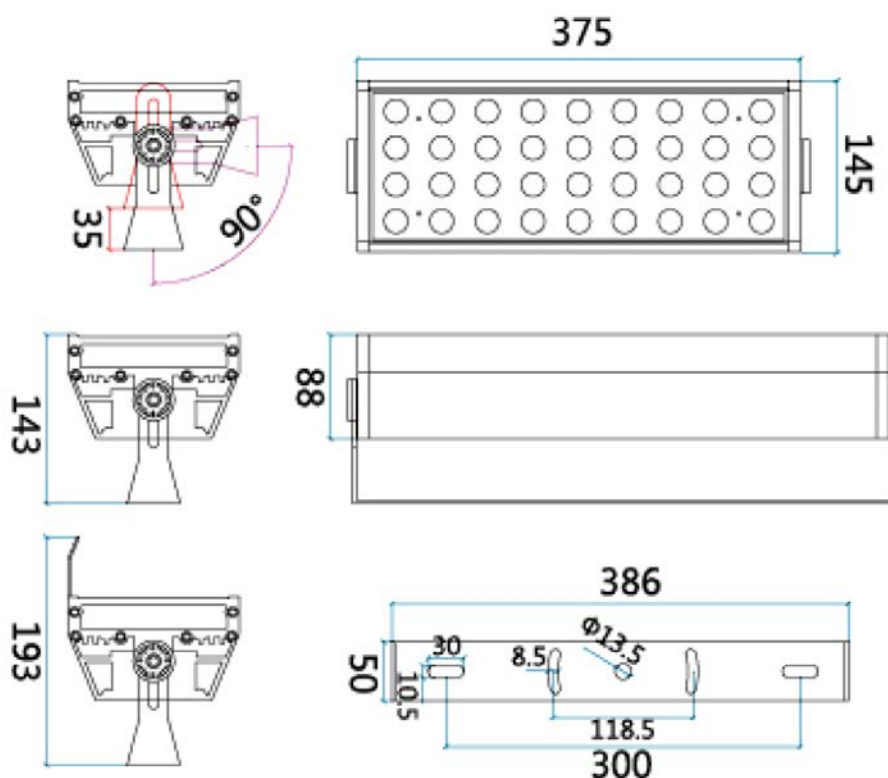

more information in www.la-luce.it