





 **PROJECTOR** is a high output LED floodlight with provides a high-intensity wash of light with customizable beam angles for floodlighting, spotlighting, wall washing and grazing and ideal for lighting facades, large structures, bridges, sports areas, retail spaces and perimeter areas.

 **PROJECTOR** è un proiettore a LED ad alto rendimento con fornisce un wash di luce ad alta intensità con angoli del fascio personalizzabili per illuminazione a fascio, spotlight, wall washing e radente e ideale per l'illuminazione di facciate, grandi strutture, ponti, aree sportive, spazi commerciali e aree perimetrali.

TECHNICAL DATA

Type	Projector
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated
Diffuser	Tempered Safety Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	Yes

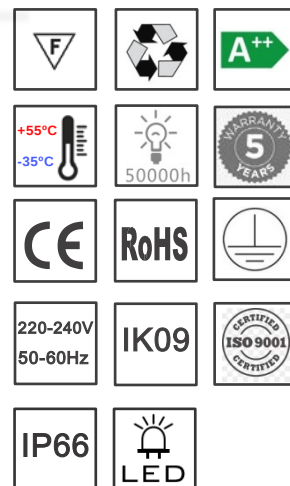




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

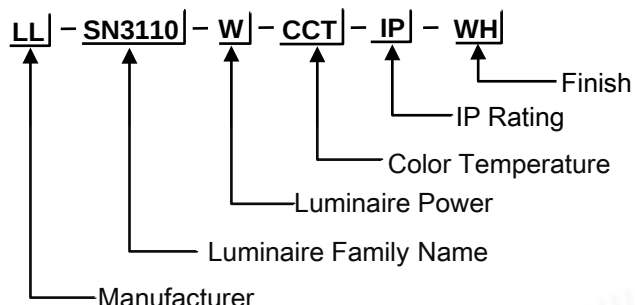

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ SN3110-50W	8	840	105	>80
☐ SN3110-60W	12	1260	105	>80
☐ SN4110-90W	15	1575	105	>80
☐ SN4110-100W	24	2520	105	>80
☐ SN4110-115W	32	3360	105	>80
☐ SN5110-130W	40	4200	105	>80
☐ SN5110-150W	45	4725	105	>80
☐ SN5110-200W	50	5250	105	>80

COLOR TEMPERATURE OPTION

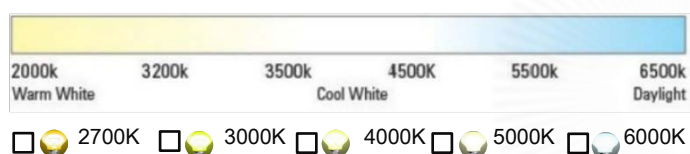

BEAM ANGLE OPTION

☐ 5° ☐ 8° ☐ 15° ☐ 30° ☐ 45° ☐ 60° ☐ Asymmetric

FINISH OPTION



CONTROL OPTION

- ☐ DD DALI DIM
- ☐ D1 0-10V DIM
- ☐ PD Phase Cut DIM

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED

SEOUL

Panasonic

bridgelux

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



OSRAM

more information in www.la-luce.it