




 **PROJECTOR** is a high output LED floodlight with provides a high-intensity wash of light with customizable beam angles for floodlighting, spotlighting, wall washing and grazing and ideal for lighting facades, large structures, bridges, sports areas, retail spaces and perimeter areas.

 **PROJECTOR** è un proiettore a LED ad alto rendimento con fornisce un wash di luce ad alta intensità con angoli del fascio personalizzabili per illuminazione a fascio, spotlight, wall washing e radente e ideale per l'illuminazione di facciate, grandi strutture, ponti, aree sportive, spazi commerciali e aree perimetrali.

TECHNICAL DATA

Type	Floodlight
Installation	Surface
Housing	Die-cast Aluminium
Processing	Powder Coated / Spray Paint
Diffuser	Tempered Safety Clear Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-In
Adjustable	Yes

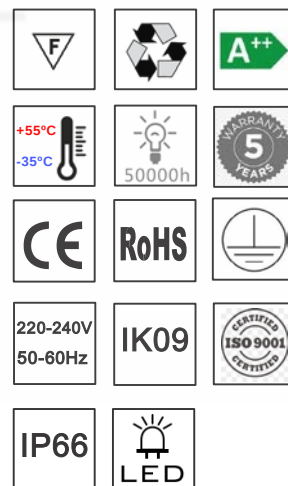




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

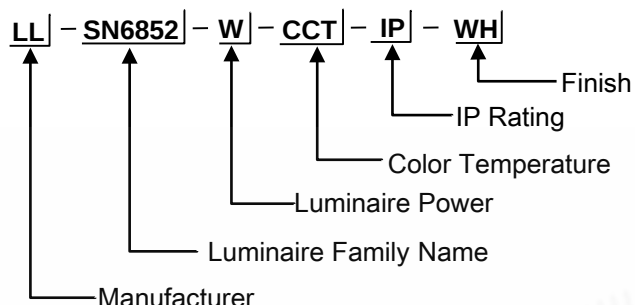

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ SN6852-30W	30	3600	120	>90
☐ SN6852-32W	32	3840	120	>90
☐ SN6852-35W	35	4200	120	>90
☐ SN6852-42W	42	5040	120	>90
☐ SN6852-46W	46	5520	120	>90
☐ SN6852-49W	49	5880	120	>90
☐ SN6852-55W	55	6600	120	>90
☐ SN6852-58W	58	6960	120	>90
☐ SN6852-62W	62	7440	120	>90
☐ SN6852-65W	65	7800	120	>90
☐ SN6852-70W	70	8400	120	>90
☐ SN6852-75W	75	9000	120	>90
☐ SN6852-80W	80	9600	120	>90

COLOR TEMPERATURE OPTION



- ☐ 2700K
 ☐ 3000K
 ☐ 4000K
 ☐ 5000K
 ☐ 6000K
 ☐ RED
 ☐ GREEN
 ☐ BLUE
 ☐ RGB
 ☐ RGBW

BEAM ANGLE OPTION

- ☐ 5°
 ☐ 8°
 ☐ 15°
 ☐ 30°
 ☐ 45°
 ☐ 60°
 ☐ 80°
 ☐ 120°
 ☐ Asymmetric

FINISH OPTION

- ☐ AL-Aluminum
 ☐ BL-Black
 ☐ GR-Grey

CONTROL OPTION

- ☐ DD DALI DIM

☐ D1 0-10V DIM

☐ PD Phase Cut DIM

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCLED

bridgelux

LUMILEDS

more information in www.la-luce.it

LED DRIVERS



TRIDONIC



DONE





TCI
LED
professional hot applications

PHILIPS

Helvar

OSRAM

PHOTOMETRIC

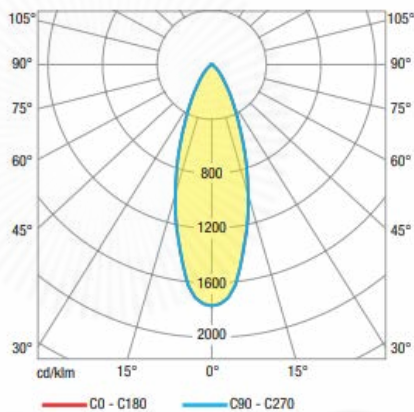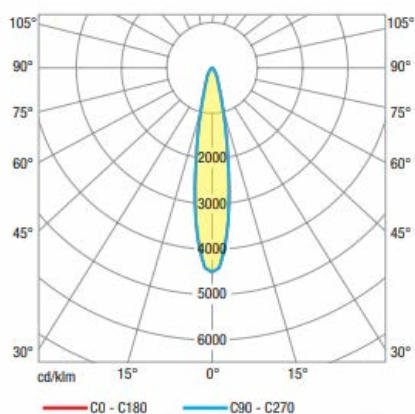

3D MODULE

