





 **BWDL-22** is Decorative oval LED pendant-surface mounted luminaire. Cover: sheet steel, powder-coated. Flat, seamless frame: aluminum extrusion profile, powder coated. Canopy: aluminum, powder-coated. Light emission through a diffuser: plastic, opal with customized dimensions.

 **BWDL-22** è un apparecchio LED decorativo ovale a sospensione da superficie. Copertura: lamiera d'acciaio, verniciata a polvere. Telaio piatto, senza saldatura: profilo estruso di alluminio, verniciato a polvere. Baldacchino: alluminio, verniciato a polvere. Emissione della luce attraverso un diffusore: plastica, opale con dimensioni personalizzate..

TECHNICAL DATA

Type	Wall
Installation	Surface
Housing	Metal / Iron
Processing	Cast Glass
Diffuser	Diffused
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed/Adjustable

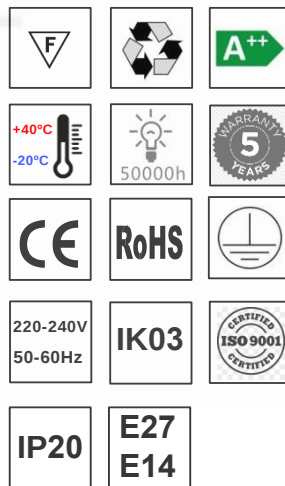




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

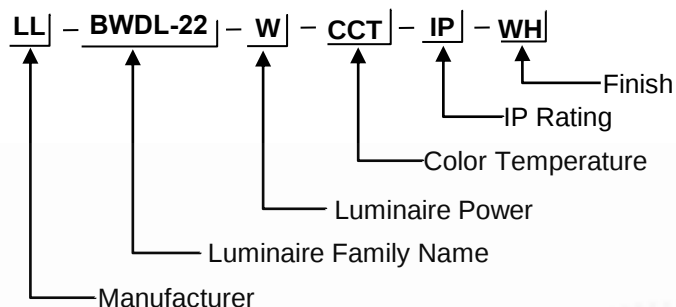

Code No.	System Power (W/m)	Lumen Output (lm/m)	Luminaire Efficacy (lm/W)	CRI
☐ BWDL-22-E27	5	450	90	>90
☐ BWDL-22-E27	7	630	90	>90
☐ BWDL-22-E27	9	810	90	>90
☐ BWDL-22-E14	4	360	90	>90
☐ BWDL-22-E14	5	450	90	>90
☐ BWDL-22-E14	7	630	90	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ DIFFUSED



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



FINISH OPTION



☐ WH-White ☐ BR-Black ☐ GO-Gold ☐ CH-Chrome ☐ NI-Nickel

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic


LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE




TCI^{LED}
professional led applications

PHILIPS


Helvar

OSRAM


PHOTOMETRIC

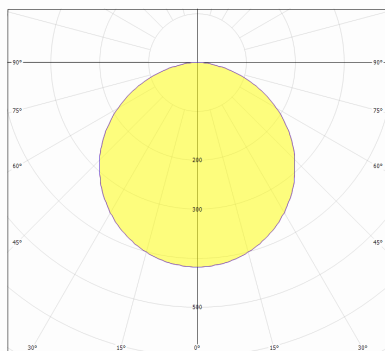


3D MODULE

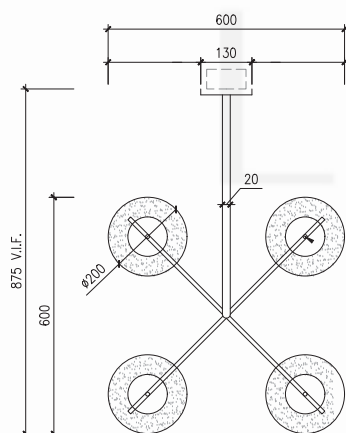

PLAN VIEW

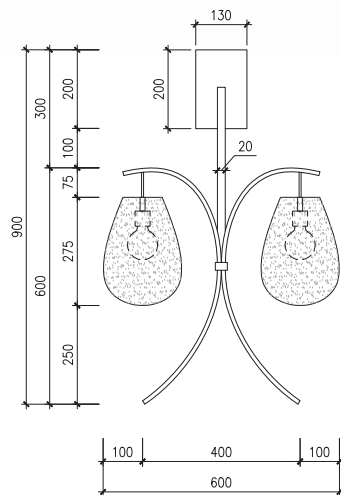

FRONT VIEW

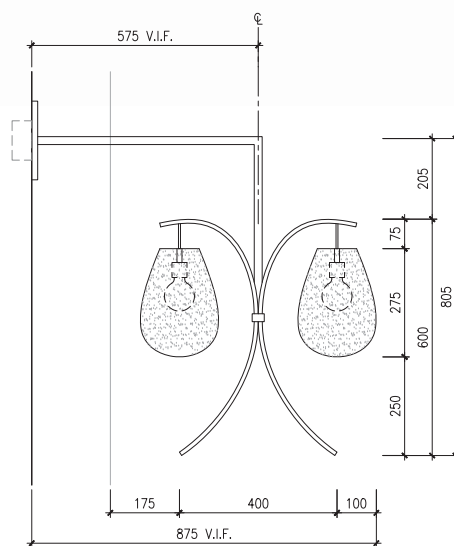

SIDE VIEW

more information in www.la-luce.it