





 **DL04** is a recessed LED slim downlight with an opal polycarbonate diffuser for high-quality uniform lit appearance, relevant performance, and ease of installation. adaptable to all kinds of modular ceilings and plaster with different diameters, wattage, lumen, beam angle, CRI, and CCT option.

 **DL04** è un downlight LED da incasso sottile con un diffusore in polycarbonato opale per un aspetto luminoso uniforme di alta qualità, prestazioni rilevanti e facilità di installazione. adattabile a tutti i tipi di controsoffitti modulari e intonaco con diversi diametri, potenza, lumen, angolo del fascio, CRI e opzione CCT..

TECHNICAL DATA

Type	Downlight
Installation	Recessed
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Opal Polycarbonate
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Remote
Adjustable	Fixed

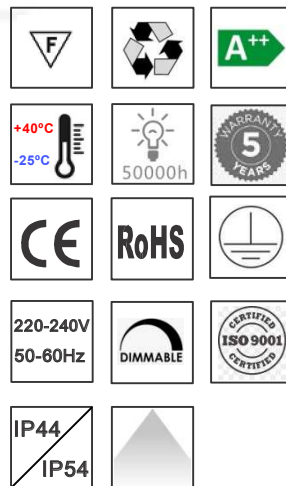




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

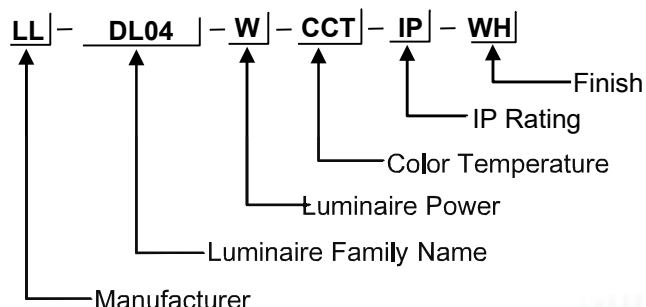

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ DL04 - 10W	10	1150	115	>90
☐ DL04 - 12W	12	1380	115	>90
☐ DL04 - 16W	16	1840	115	>90
☐ DL04 - 18W	18	2070	115	>90
☐ DL04 - 20W	20	2300	115	>90
☐ DL04 - 25W	25	2875	115	>90
☐ DL04 - 30W	30	3450	115	>90

COLOR TEMPERATURE



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ DIFFUSED



FINISH OPTION



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCI LED

bridgelux

LUMILEDS

LED DRIVERS



TRIDONIC



DONE





PHILIPS


Helvar

OSRAM

PHOTOMETRIC

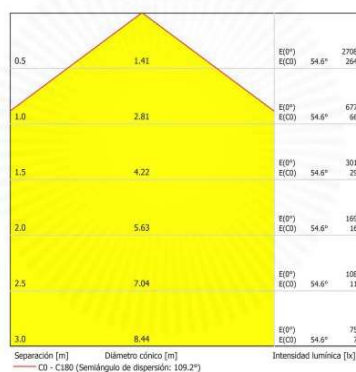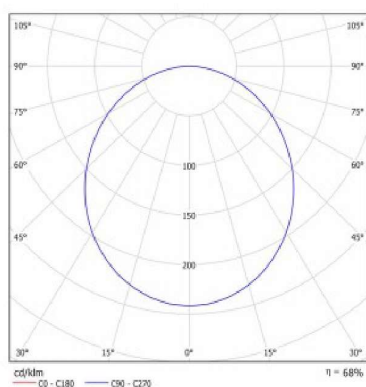

3D MODULE

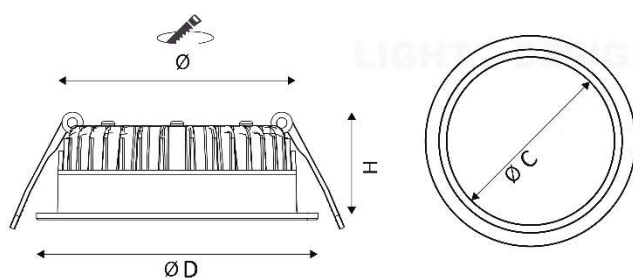

WATTAGE (W)	DIAMETER (D)	HEIGHT (H)	CUT-OUT (C)
8	ø110mm	28-35 mm	ø95mm
10	ø140mm	28-35 mm	ø125mm
12	ø140mm	28-35 mm	ø125mm
16	ø160mm	28-35 mm	ø140mm
18	ø180mm	28-35 mm	ø160mm
20	ø180mm	28-35 mm	ø160mm
22	ø230mm	28-35 mm	ø200mm
25	ø230mm	28-35 mm	ø200mm
30	ø280mm	28-35 mm	ø250mm