





 **WP** is Ceiling and wall-mounted luminaires for damp or corrosive environments and sheltered outdoor areas; also recommended for severe mechanical stability demands with different wattage, lumen, beam angle, CRI, and CCT option.

 **WP** è Plafoniere e applique per ambienti umidi o corrosivi e aree esterne riparate; consigliato anche per requisiti di stabilità meccanica severa con diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Weatherproof
Installation	Surface
Housing	Polycarbonate
Processing	Powder Coated
Diffuser	Polycarbonate
Emergency Unit	On request
Light Emission Direction	Symmetrical
Glow Wire Test	850°
Safety Class	1
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Yes
Adjustable	No

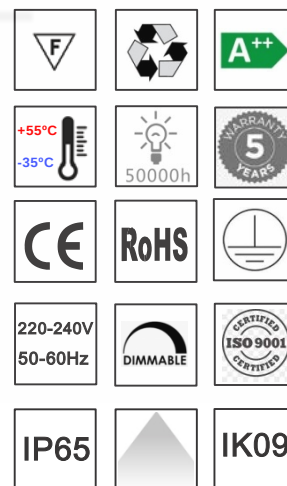




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

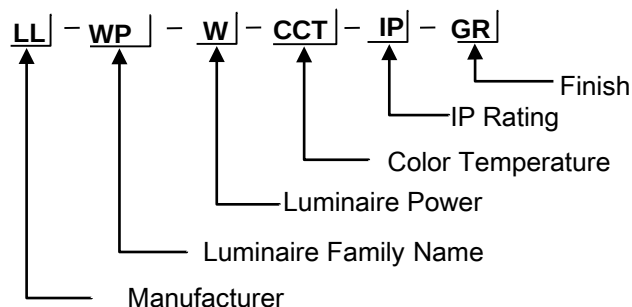

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WP-20W	20	2200	110	>90
☐ WP-35W	35	3850	110	>90
☐ WP-40W	40	4400	110	>90
☐ WP-45W	45	4950	110	>90
☐ WP-50W	50	5500	110	>90
☐ WP-60W	60	6600	110	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE

☒ WIDE



CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



FINISH OPTION



☐ WH-White ☒ GR-Grey

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic


LUMINUS

TRIDONIC

CITIZEN ELECTRONICS CO., LTD.

TCLED
professional led applications

bridgelux
bridging light and life™



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC




PHILIPS



Helvar

OSRAM

PHOTOMETRIC

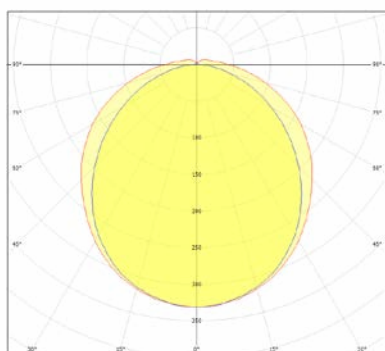

3D MODULE

