





 **WL06** up and down - luminaire combines brilliant LED light with a straightforward design. Oppositely arranged, the two LED sources generate an up-and-downwardly directed with different sizes, wattage, lumen, CRI, and CCT options.

 **WL06** su e giù - che combina una luce LED brillante con un design semplice. Disposte in modo opposto, le due sorgenti LED generano una direzione verso l'alto e verso il basso con diverse opzioni di dimensioni, potenza, lumen, CRI e CCT.

TECHNICAL DATA

Type	Wall Light
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

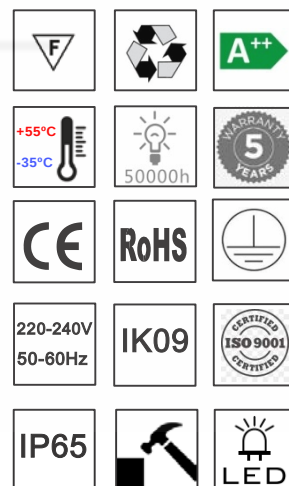




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

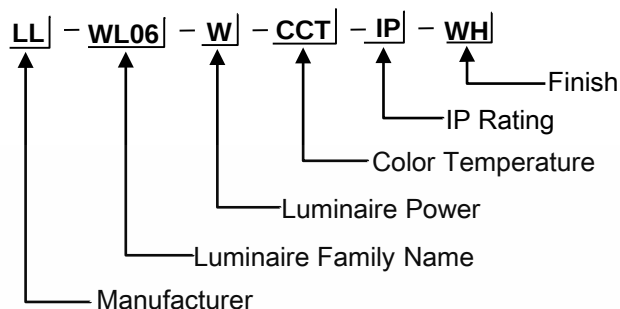

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WL06-4W	2x2	2 x 210	105	>90
☐ WL06-8W	2x4	2 x 420	105	>90
☐ WL06-14W	2x7	2 x 735	105	>90
☐ WL06-16W	2x8	2 x 840	105	>90
☐ WL06-24W	2x12	2 x 1260	105	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☒ 60° ☐ 90°



FINISH OPTION



☐ AL- Aluminum ☐ BL - Black ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM
☐ D1 0-10V DIM
☐ PD Phase Cut DIM

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLED
professional led applications

SEOUL

Panasonic

bridgelux
bridging light and life™


NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE





PHILIPS



OSRAM

PHOTOMETRIC

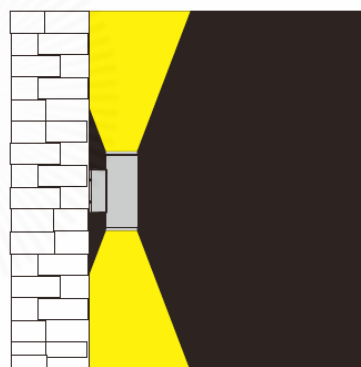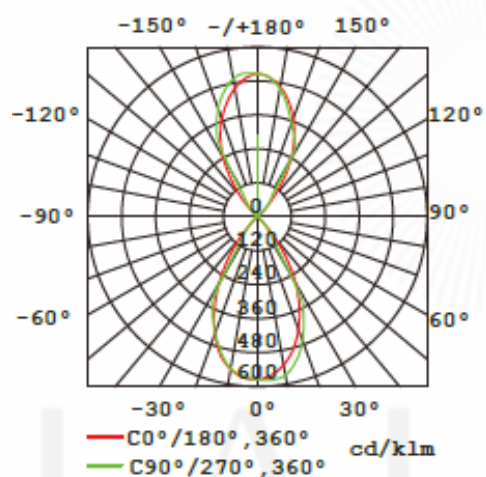

3D MODULE

