





 **SQDN03** is a surface Ceiling-mounted luminaire wire to the base with a pluggable connection for easy installation of different wattage, lumen, beam angle, CRI, and CCT option.

 **SQDN03** è un apparecchio per montaggio a soffitto di superficie, cavo alla base con una connessione a innesto per una facile installazione di diverse opzioni di wattaggio, lumen, angolo del fascio, CRI e CCT.

TECHNICAL DATA

Type	Square Downlight
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Tempered Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

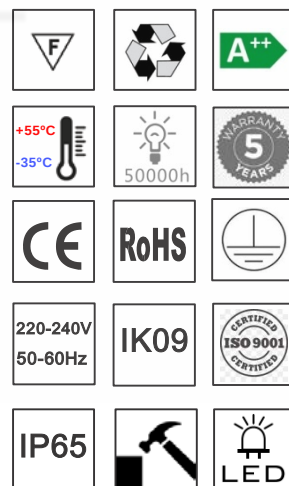




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

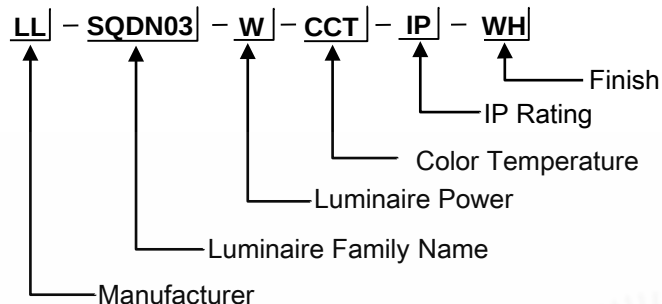

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ SQDN03-5W	5	500	100	>90
☐ SQDN03-7W	7	700	100	>90
☐ SQDN03-9W	9	900	100	>90
☐ SQDN03-12W	12	1200	100	>90
☐ SQDN03-14W	14	1400	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 15° ☐ 24° ☐ 36° ☐ 40° ☐ 60° ☐ DIFFUSED



FINISH OPTION



☐ **SS**-Stainless Steel

☐ **AL**-Aluminum

☐ **GR**-Grey

CONTROL OPTION

☐ DD

DALI DIM



☐ D1

0-10V DIM



☐ PD

Phase Cut DIM



☐ OI

On / Off

LED CHIPS

OSRAM



NICHIA

CREE

Panasonic

LUMINUS

TRIDONIC


CITIZEN ELECTRONICS CO., LTD.

TCLED
professional led applications

bridgelux
bridging light and life™

LUMILEDS

more information in www.la-luce.it



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE



TCI^{LED}
professional led applications



PHILIPS

HEP^{ower for light}

Helvar

OSRAM

PHOTOMETRIC

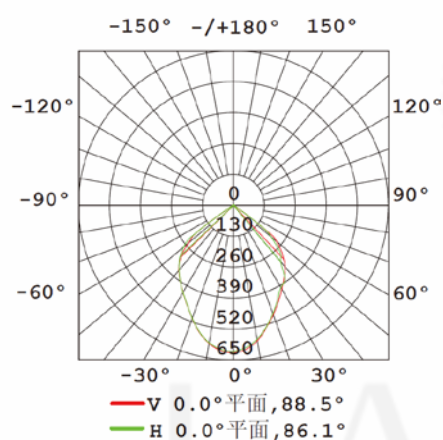

3D MODULE

