

WALL UP/DOWN LIGHT





 **WL13** is Square shaped - up and down - luminaire combines brilliant LED light with a straightforward design. Oppositely arranged, the two LED sources generate an up-and downwardly directed with different sizes, wattage, lumen, CRI, and CCT options.

 **WL13** è un apparecchio di forma quadrata - su e giù - che combina una luce LED brillante con un design semplice. Disposte in modo opposto, le due sorgenti LED generano una direzione verso l'alto e verso il basso con diverse opzioni di dimensioni, potenza, lumen, CRI e CCT.

TECHNICAL DATA

Type	Wall Light
Installation	Surface
Housing	Die-cast Aluminum
Processing	Powder Coated
Diffuser	Safety Glass
Light Emission Direction	Symmetrical
Glow wire test	850°
Safety Class	I
Direct Mounting on Normal Flammable Surface	Yes
Driver Included	Built-in
Adjustable	Fixed

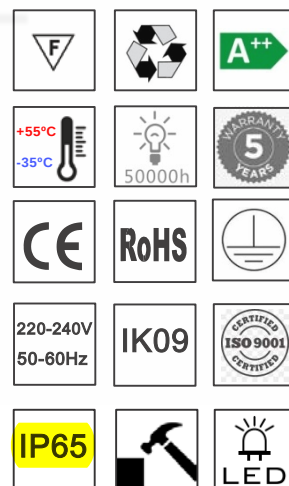




LA LUCE


LIGHT - DESIGN - MORE

ORDERING CODE

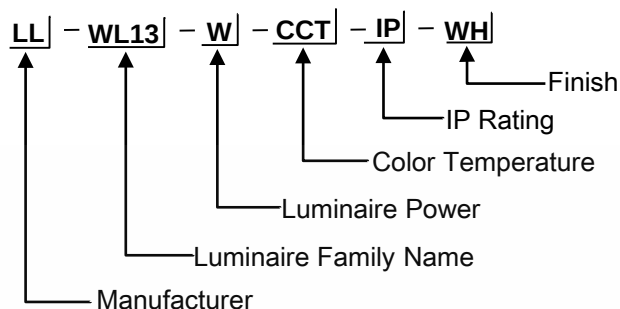

Code No.	System Power (W)	Lumen Output (lm)	Luminaire Efficacy (lm/W)	CRI
☐ WL13-4W	4	400	100	>90
☐ WL13-8W	8	800	100	>90
☐ WL13-12W	12	1200	100	>90
☐ WL13-14W	14	1400	100	>90
☐ WL13-20W	20	2000	100	>90

COLOR TEMPERATURE OPTION



☐ 2700K ☒ 3000K ☐ 4000K ☐ 5000K ☐ 6000K

BEAM ANGLE OPTION

☐ 5° ☐ 10° ☐ 15° ☐ 30° ☐ 60° ☐ 90° ☒ Diffuse

FINISH OPTION



☐ AL- Aluminum ☐ BL - Black ☐ GR-Grey

CONTROL OPTION

☐ DD DALI DIM
☐ D1 0-10V DIM
☐ PD Phase Cut DIM

LED CHIPS

OSRAM

CREE

TRIDONIC

TCLE
professional led applications

SEOUL

Panasonic


bridgelux
bridging light and life™

NICHIA

LUMINUS

CITIZEN ELECTRONICS CO., LTD.

LUMILEDS



LA LUCE

LIGHT - DESIGN - MORE

LED DRIVERS



TRIDONIC



DONE






PHILIPS



OSRAM

PHOTOMETRIC

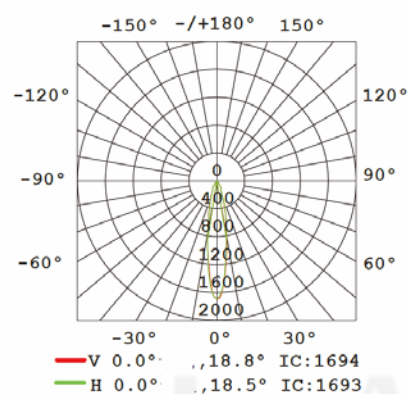

3D MODULE

